

# The first UL-924 LED Exit Sign Retrofit Kits approved for use with Edgelit and Sign Box styles.

**Save Energy Save Money Reduce Waste**


- UL-924 approved for use with Alkco, Cooper, High-Lites, Lightolier, Lithonia, Surelites, Big Beam and Western Lighting exit signs\*
- **City of Chicago and New York approved**
- Eligible for various incentives including LEED points and Utility Rebates (ComEd and ConEd)
- Easy to Install: Splice into existing wires
- 10-year Limited Warranty<sup>#</sup>
- U.S. and Foreign Patents Pending
- Designed in Chicago, IL USA
- Lighting fixture extrusion made of recycled aluminum
- 89% Energy Saving/Approximately 1 year payback

<sup>#</sup> See [Radionic.net](http://Radionic.net) for specific model numbers and warranty details

## \* \$ Savings per Year

**89% Energy Savings\*** - compared to conventional fluorescent Exit Sign

\*Based on a rate of \$0.12/KW

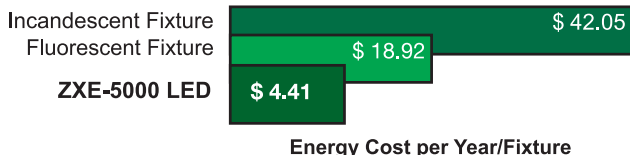

## ZXE-5000 Specifications:

### Part #

LED Exit Sign Retrofit Kit Description:

**Wattage**

### ZXE-5000-I-UNV

**Internal** Power Supply

4.5 Watts

Universal Voltage 120-277 V

All Mounting Hardware included. Length: 9"; 56 LEDs.

Can be used in box-type or edgelit-type signs.

Not intended for use with battery backup exit signs.

### ZXE-5000-E-UNV

**External** (remote) Power Supply

4.5 Watts

Universal Voltage 120-277 V

All Mounting Hardware included. Length: 9"; 56 LEDs.

Can be used in box type or edgelit-type signs.

Not intended for use with battery backup exit signs.

### ZXE-5000-I-BBUNV

**Internal** Power Supply for use with **Battery Backup** Exit Signs

4.5 Watts

Universal Voltage 120-277 V (**available January 2011**)

All Mounting Hardware included. Length: 9"; 56 LEDs total;

Approved for use with the following battery backup exit

signs: Cooper/Surelites CHX Series and Big Beam EFX Series

### ZXE-5000-E-BBUNV

**External** (remote) Power Supply for use with **Battery Backup** Exit Signs

4.5 Watts

Universal Voltage 120-277 V (**available January 2011**)

All Mounting Hardware included. Length: 9"; 56 LEDs total;

Approved for use with the following battery backup exit

signs: Cooper/Surelites CHX Series and Big Beam EFX Series

**RADIONIC**  
HI-TECH, INC.

6625 W. Diversey Avenue, Chicago, IL 60707

phone: (773) 804-0100, fax (773) 804-0180 [www.radionic.net](http://www.radionic.net)

*In keeping with our commitment to sustainability, this document was printed on recycled paper.*