

FEATURES & SPECIFICATIONS

INTENDED USE

Provides maintenance-free general illumination for outdoor use in residential and commercial applications such as retail, education, multi-unit housing and storage. Ideal for lighting building facades, parking areas, walkways, garages, loading areas and any other outdoor space requiring reliable safety and security.

CONSTRUCTION

Sturdy weather-resistant aluminum housing with a bronze finish.

High performance LEDs are powered by an MVOLT driver that provides 2,300/3,100 delivered lumens at 5000K. 50,000 hour average LED life means no lamp replacement. Fixture is maintenance-free.

Operating temperature -30°C to 40°C.

Adjustable Dusk-to-Dawn, photocell standard automatically turns light on at dusk and off at dawn for convenience and energy savings.

Photocell can be disabled by rotating the photocell cover.

OPTICS

Precision-molded acrylic lenses provide optimal luminaire spacing with Type 3 distribution.

Nighttime Friendly™ full cutoff above 90° angle, standard.

INSTALLATION

Wall or arm mount (mounting arm sold separately).

All mounting hardware included.

LISTINGS

UL Certified to US safety standards. C-UL Certified to Canadian safety standards. Wet location listed.

Tested in accordance with IESNA LM-79 and LM-80 standards. DLC qualified product.

WARRANTY

Five-year limited warranty.

Full warranty terms located at www.AcuityBrands.com/CustomerResources/Terms_and_Conditions.aspx.

NOTE: Specifications are subject to change without notice.

Catalog Number
Notes
Type

Outdoor General Purpose

OLW

LED WALL PACK




DESIGNLIGHTS
CONSORTIUM



Specifications

All dimensions are inches (centimeters)

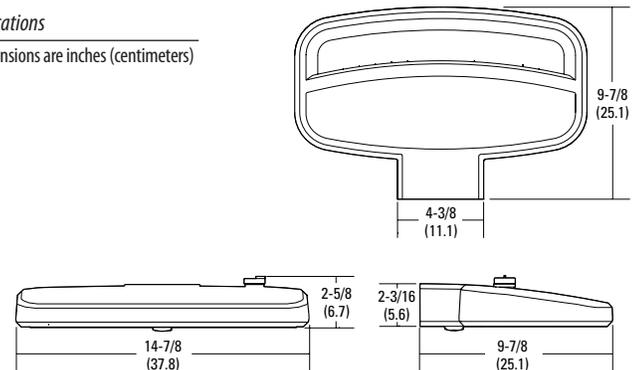

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: OLW 23

OLW	23			
Series	Lumens / Color Temperature (CCT)	Voltage	Features	Finish
OLW LED Wall Light	23 2300 delivered lumens / 5000K ¹ 31 3100 delivered lumens / 5000K ¹	(blank) MVOLT (120V-277V)	(blank) Photocell included	(blank) DDB Dark Bronze

Accessories: Order as separate catalog number.

OMA M6 14" Aluminum Mounting Arm

Notes

1 Correlated Color Temperature (CCT) shown is nominal per ANSI C78,377-2008.

OLW LED Wall Light

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.
Tested in accordance with IESNA LM-79 and LM-80 standards.

