MyLightLink™ LIGHTING CATALOG

LEADERS IN COMMERCIAL LIGHTING

SYNERGY LIGHTING

"The Nation's #1 Choice For Lighting Supply & Service!"

P: 941-756-4844 F: 941-756-4866

Toll Free: 877-220-5483

www.SynergyLightingUSA.com

AUTHORIZED DEALER

- Incandescent Lamps
- Led Lamps
- Halogen Lamps
- Plug-In Compact Compacts
- Self Ballasted Compacts
- Fluorescent Lamps
- HID Lamps
- Ballasts
- Sockets
- Fixtures
- Landscape Lighting
- Posts & Poles
- Lighting Accessories

Terms and Conditions

GENERAL

Terms and Conditions are determined by each Authorized Dealer but follow these Guidelines. See your Dealer for their specific Terms and Conditions of Sale.

PRICING

Prices are subject to change without notice and are subject to acceptance at time of order.

FREIGHT

Freight and Delivery Policies are determined by each Authorized Dealer. Please contact your local Dealer for their current Policy.

BACKORDERS

Backorders are shipped plus freight unless the backorder meets the freight allowance requirement. Customer may opt to ship complete to maintain freight allowance and will be notified of backorder prior to shipping.

RETURN POLICY

Items must be returned within 30 days of purchase. All normal stock items returned within 30 days are subject to a 25% restock charge. Non-Stocked items are subject to a 25% restocking charge plus the applicable restocking charge imposed by our vendor up to an additional 50% plus freight in and out. All returns can only be used for in store credit. All returns must be pre-approved and be accompanied with a returned goods authorization (RGA) number.

TERMS

Standard terms are Net 30 days. Most major credit cards are accepted at time of order for payment. Company reserves the right to refuse credit card payment at its discretion.

DEFECTIVE MERCHANDISE

All defective merchandise must be returned with a company issued Returned Goods Authorization (RGA). Credit for returned merchandise is subject to testing and credit by manufacturer. Any merchandise found to be non-defective will be returned to customer at the customers expense including freight to/from vendor.

WARRANTIES

Warranties are limited to those provided to the company by the manufacturer. In no case shall the company be liable for losses other than replacement of material and only when provided by the manufacturer.

ERRORS & OMISSIONS

Company will not be held responsible for any errors or omissions in pricing or specifications. Material specifications are subject to change without notice.

PERFORMANCE INDEMINITY

Customer agrees to indemnify and hold the company harmless for any losses incurred from performance or lack of performance by the company.

CATALOG Table of Contents

CLICK ON ANY CATEGORY TO GO TO THE PAGE

OVERVIEW

Product Reference Guide....5
Common Bulb Shapes & Sizes....6
Choosing the Right Bulb....9
Products at a Glance....11

INCANDESCENT LAMPS

GENERAL PURPOSE

A15 - A19 Standard....13
A19 - Rough Service - Buglight....14
A 21Standard / A21 Traffic Signal....14
A 21 3-Way....15
PS25 3-Way....15
PS30 Medium Base....15
PS35 Mogul Base....15
Tubular Exit T6 / T6.5 / T7....16
Tubular T10 Picture Lamps....16
Sign / Indicator S6 / S11 / S14 / C7....17

REFLECTORS

R12 / R14 / R16....17
R20....18
BR30/BR40....18
PAR 38 / PAR 38 Colors....19
PAR 46 / PAR 56....19
Heatlamps - R40 / BR40....19

DECORATIVE

Globes - G16.5 / G25 / G40....20
Chandelier Flame Tip....21
Chandelier Torpedo Tip....21

SPECIALTY

A19 - 12Volt....22
Tuff Coat - A15 / B10 / A19 / R12 / BR40....22

LED LAMPS....23

HALOGEN LAMPS

Bi-Pin....26
Double Loop....27
JD - Single Ended....27
MR11/MR16 12 Volt....28
MR16 120 Volt....30
ALR 12 Reflector....31
PAR16/PAR20....31
PAR30....32
PAR36 Screw Terminal....33
PAR38....34
Double Ended Quartz....35

PLUG-IN COMPACT FLUORESCENT LAMPS

Twin Tubes 2-Pin....36
Long Twin Tubes 4-Pin....38
Twin Tube 13W 4-Pin....38
Germicidal Twin Tubes 4-Pin....39
Quad Tubes 2-Pin....39
Quad Tubes 4-Pin....41
Triple Tubes 4-Pin....43

SELF-BALLASTED COMPACT FLUORESCENT

Spiral Lamps....45
Multi-U Tube High Wattage Compacts....46
Spirals - 3 - Way - Dimmable - Bug....47
R20 / R30....47
R40....48
Dimmable R30 / R40....48
PAR20 / PAR30 / PAR38....49
BR38....49
Bullet, Globe, Torpedo Compacts....50
A Lamp....50

LINEAR FLUORESCENT LAMPS

Pre-Heat Lamps T5-T8 Bi-Pin....51
Pre-Heat Lamps T12 Bi-Pin....52
Rapid Start T12 Bi-Pin....52
Instant Start T6-T12 Single Pin....52
High Output T12....53
Electronic T8....55
Standard T8....57
Polylux T8....57
T8 / T8 High Output....58
Standard T5 Mini Bi-Pin....58
High Output T5....59
U-Bend T8 / T12....60
Circline T9....61
Specialty Fluorescents - Blacklight - Colors....61

HID LAMPS

MERCURY VAPOR

Medium Base - B55/BD17/BD70/A23.5/R40....62
Mogul Base....63
Self Ballasted....63

METAL HALIDE

Medium Base....64
Medium Base Protected 50-175W....65
Mogul Base....66
Mogul Base Protected 175-1,000W....70
Pulse Start 175-1,000W....71
Bi-Pin 39-150W....72
PAR20/PAR30/PAR38....72

HIGH PRESSURE SODIUM

Medium Base 35-150W....73
Mogul Base 50-1,000W....74

LOW PRESSURE SODIUM

18-180W Double Contact By22D Base....75

BALLASTS

Incandescent/Halogen Transformers....76
Magnetic Fluorescent....77
T5/T5 HO Electronic Fluorescent....78
T8 Electronic Fluorescent....79
T12 Electronic Fluorescent....82
Electronic Fluorescent - Workhorse....83
Magnetic Compact Fluorescent....84
Magnetic Compact Fluorescent Adapters....84
Electronic Compact Fluorescent....85
Circline....87

CATALOG Table of Contents

CLICK ON ANY CATEGORY TO GO TO THE PAGE

Electronic Sign 88
Magnetic Sign 88
Neon Transformers 89
HID Metal Halide Ballast Kits 90
Pulse Start Metal Halide Ballast Kits 92
Electronic Metal Halide 93
High Pressure Sodium Ballast Kit 94
HID Fluorescent Can 95
Replacement Capacitors 96
Replacement Ignitors 97

SOCKETS

Miniature Bi-Pin 98
Fluorescent Starter Bases 99
Medium Bi-Pin 99
Slimline Single Pin 102
HO / VHO 102
Circline 104
Compact Fluorescent 104
Long Twin Tube Sockets & Clips 105
Mini Candelabra / Candelabra 106
Medium Base 107
Mogul Base 108
Double Contact Base 109
Prong Base 109
Bi- Pin Sockets 110
Halogen Turn / Lock 111
Double Ended 111
Reducers / Extenders 112

FIXTURES

Two-Head Emergency Fixtures 115
Retrofit Kits 116
Exit Lights 116
Exit / Emergency Combo 117
Fluorescent Lay-Ins - Parabolic 118
Fluorescent Industrial - Channel 119
Fluorescent Wrap Round - Under Cabinet 121
Under Cabinet Xenon 122
Compact Fluorescent Recessed Can 122
Retro Can - Canopy Lighting 123
Sign Lights 124
Vapor Proof 124

WALL PACKS

Polycarbonate 125
Standard 126
Large 127
Full Cutoff 128

FLOOD LIGHTS

Fluorescent 129
Quartz Halogen 130
Small Horizontal HID/CF 130
Medium 131
Round Back 132
Large Compact 132
Large HID 133
Extra Large HID 134

VANDALS

Vandal Resistant 135
Garage Lighter 136

HIGH BAY / LOW BAY

Fluorescent Low Bay 136
Build A Bay 137

AREA LIGHTS

Pole Top Lights 138
Shoebox 16"x16" 139
Cobra Head 139
Sports Lighter 140
Dusk To Dawn Security Light 140

ROPE LIGHTS

Rope Light 3/8" Diameter 141
Rope Light 1/2" Diameter 142

LANDSCAPE LIGHTING

Low Voltage Fixtures 143
Bullets - PAR20 / PAR30 / PAR38 144
Premium Bullets 145
HID Palm Lighter 146
Pagoda Lights 147
Low Voltage Transformers - Cable 148
In - Ground Posts 149

POLES & POSTS

Aluminum - Fiberglass Poles 150
Mounting Accessories 151
Bullhorns 152
Reducers 153
Wall Mount Brackets 153
U-Brackets - Yokes 154
Post Caps - Round - Square 154
Globes - Spheres - Victorian - Acorn 155
Globe Fitters 155

ACCESSORIES

Wire Nuts 156
Fluorescent Starters 156
Occupancy Sensors 156
Batteries 157
Emergency Ballasts 157
Fuses 158
Thermal Detector 158
Time Clocks 159
Tube Guards 159
Photo Cells 160
Fish Tapes 161
AC Disconnect 161
Additional Fixtures 162

PRODUCT Reference Guide

COLOR APPLICATION GUIDE

2700-3000K	3500K	4100K	5000K	6500K
Warm - 2700K - 3000K Commonly used in homes & restaurants.	Soft - 3500K Commonly used in Showrooms & Reception Areas.	Cool - 4100K Commonly used in Offices & Hospitals.	Natural White - 5000K Commonly used in Galleries & Jewelry Displays.	Daylight - 6500K Commonly used for Signage & Landscape lighting.

COLOR MATCHING

Depending on the application of the light there are several color temperatures to choose from:

WARM WHITE (2700K-3000K) emits a yellow/ white and warm color. These lamps are most commonly used in residential areas such as living rooms and bedrooms.

SOFT WHITE (3500K) is typically used in public reception areas, showrooms, office areas and bookstores. Soft White still maintains some yellow coloring but is closer to absolute white on the spectrum.

COOL WHITE (4100K) is most commonly used in office areas, conference rooms, hospitals and classrooms. It's close to a pure white light without a hint of yellow or blue.

NATURAL WHITE (5000K) is most commonly used in jewelry stores, galleries & museums, medical examination areas and also kitchens, garages and bathrooms. It's a bright white light with a slightly blue color.

DAYLIGHT (6500K) is a blue/white light and similar to the natural daylight under a blue sky on a clear day. It is the best light to detect subtle color differences on clothing or other objects.

COLOR RENDERING INDEX

The Color Rendering Index is a rating scale for light sources (lamps) from 0 to 100 to indicate how accurately colors can be perceived under a light source. The higher the CRI (based upon a 0-100 scale) the richer and more vivid colors generally appear. Lighted sources with a lower CRI will make objects appear to be washed out and more dull.

LAMP COLOR

The photographs shown above illustrate the effects that the various light sources and temperatures can make on objects. The color of light is based on the color temperature scale and rated in Kelvins. A light source in the range of 2000K - 3000K would make warm colors such as red, orange and yellow more predominant. A cool color of light would be produced by lamps in the 4000K range and make blue/cool colors more predominant.

GLOSSARY OF TERMS

AVERAGE RATED LIFE
An average rating, in hours that indicates when half of a large group of lamps have failed. (Operated at rated lamp Voltage and current).

BALLAST
A lighting ballast is a piece of equipment required to control the starting and operating voltages of electrical gas discharge lights. Examples of gas discharge light sources include fluorescent and neon lights and high-intensity discharge (HID) lamps.

FLOODLIGHT
A reflector lamp with a relatively wide beam pattern. Also a luminaire consisting of lamp and reflector at fixed distance providing a wide field of illumination.

LIGHT
Radiant Energy that is capable of producing a visual light.

MAXIMUM OVERALL LENGTH
The total length of a lamp from the top of the bulb to the bottom of the base.

LUMENS
A unit of luminous flux; overall light output; quantity of light, expressed in Lumens.

PAR LAMPS
Pressed aluminized reflector lamp, with the outer bulb formed from two pressed glass parts that are fused or sealed together. PAR lamps may be incandescent, halogen, or HID types.

PREHEAT
A class of fluorescents requiring a starter, which allows the lamp and filaments to be properly heated before allowing the ballast to supply the correct current flow.

REFLECTOR
A devise used to redirect the light by the process of reflection.

VOLTS
The measurement of electrical potential expressed in Volts (V).

WATTS
A unit of electrical power equal to 1 joule per second. Lamps are rated in Watts to indicate power consumption (W).

COMMON BULB SHAPES

INCANDESCENT & HALOGEN

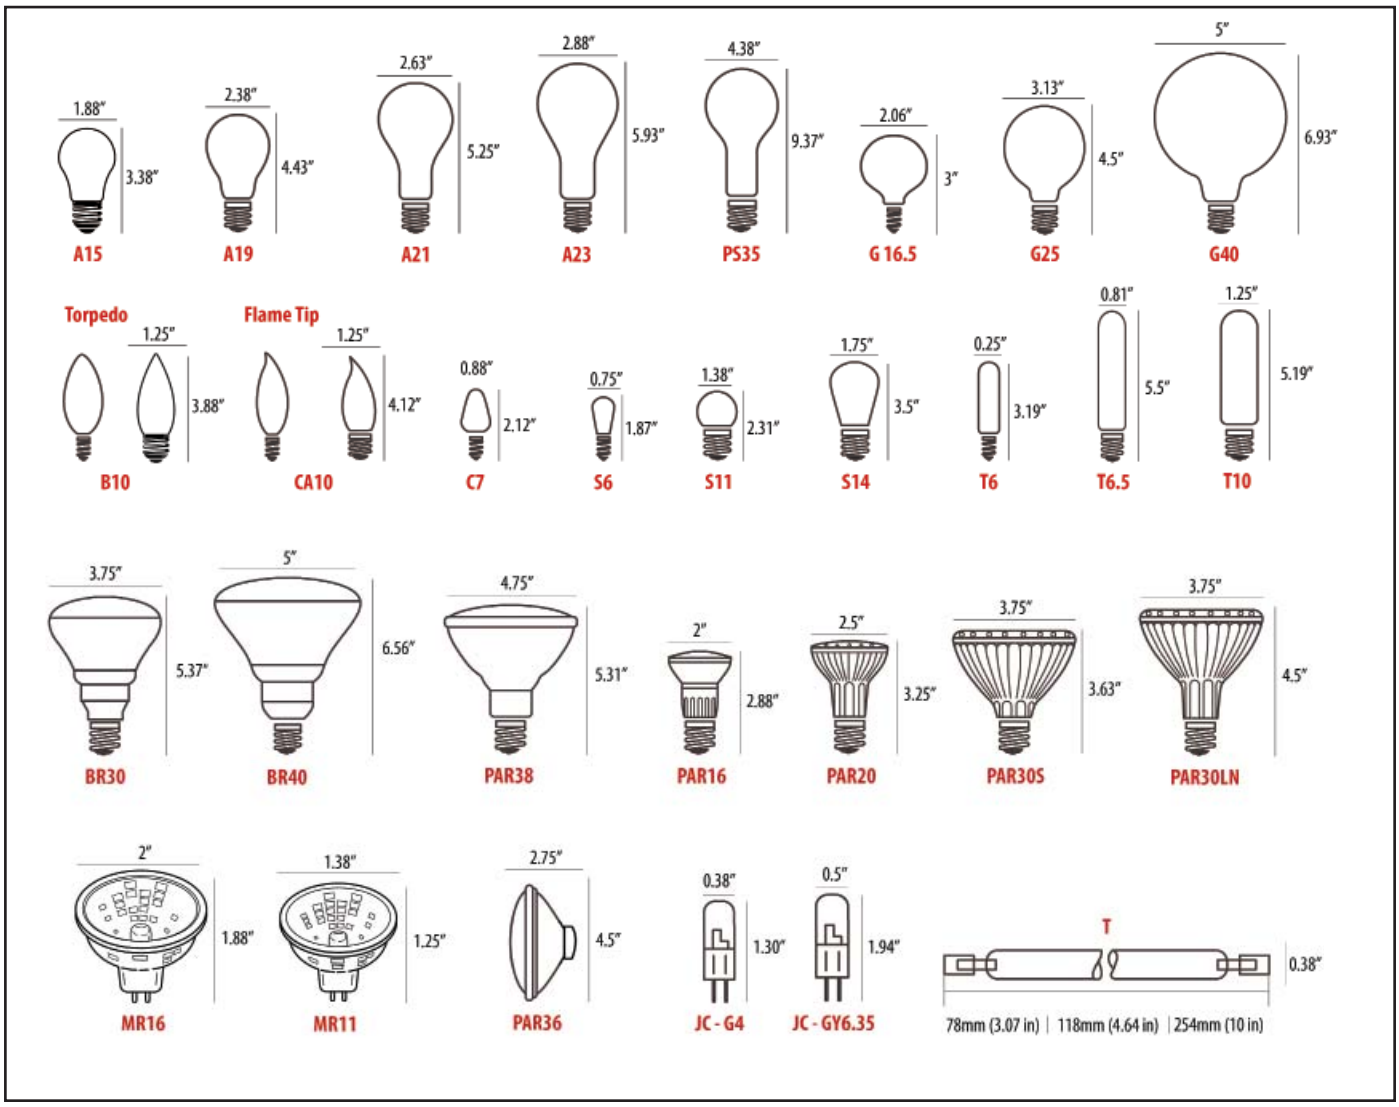

INCANDESCENT/HALOGEN Base Types

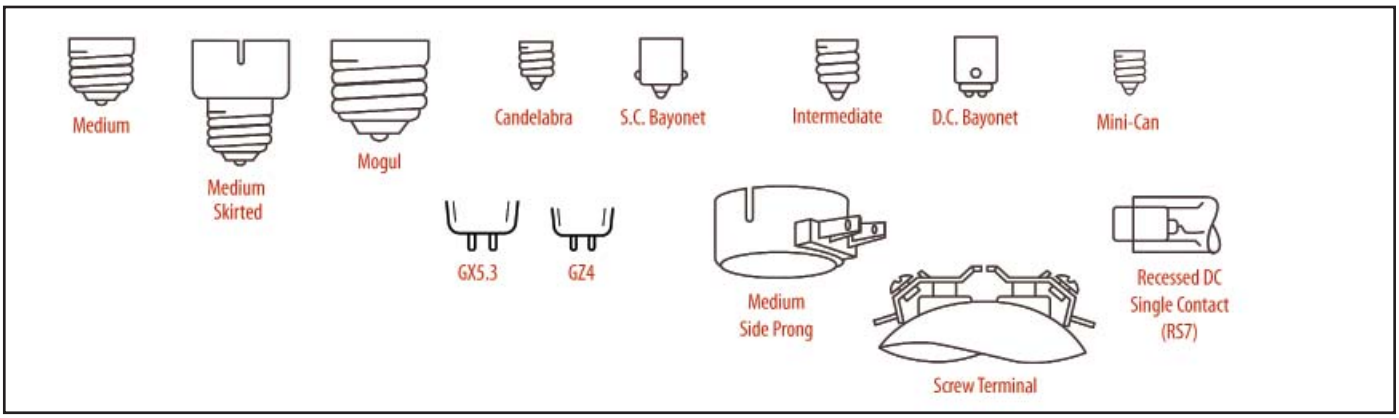

COMMON BULB SHAPES

HID

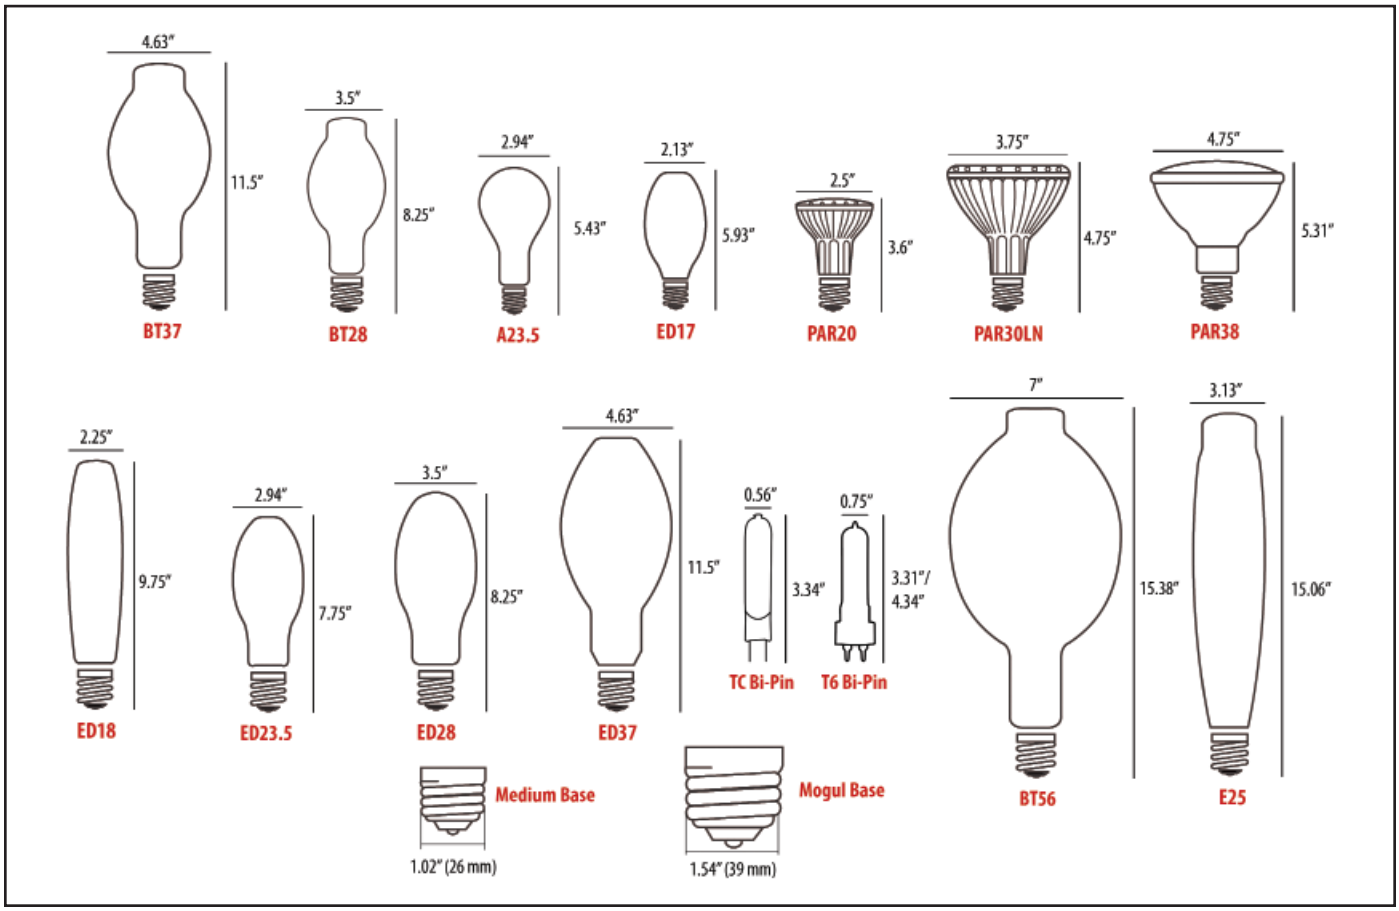

PLUG-IN COMPACT FLUORESCENT

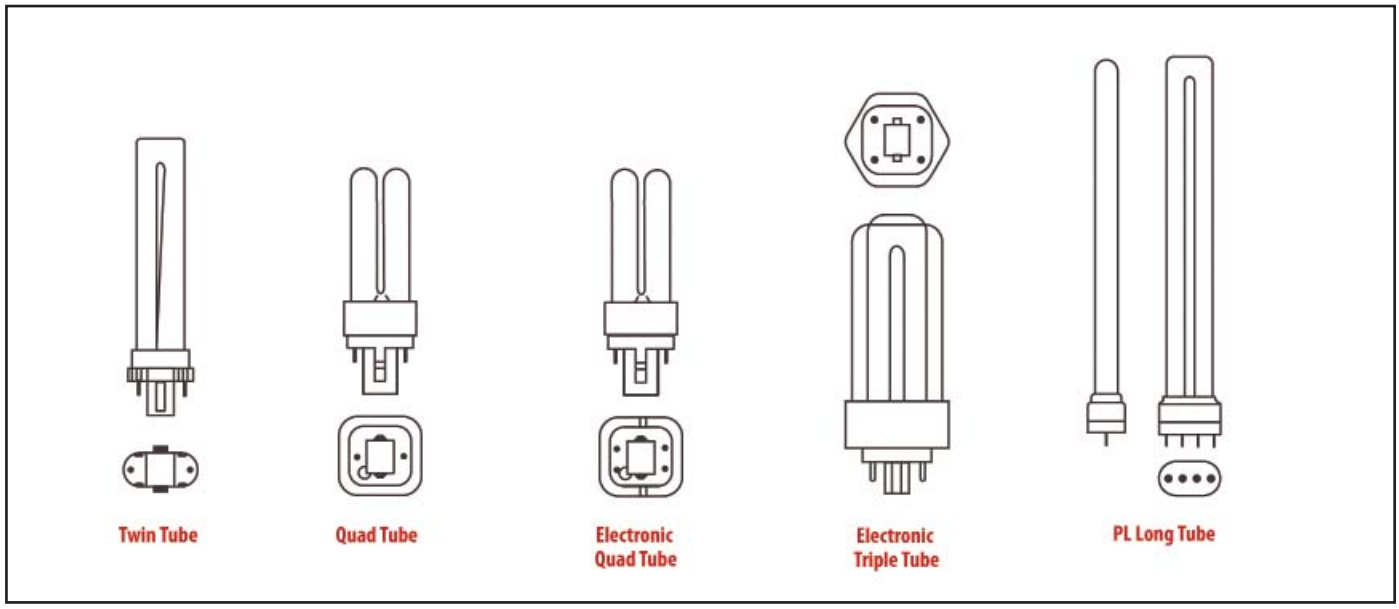

COMMON BULB SHAPES

SELF BALLAST COMPACT FLUORESCENT

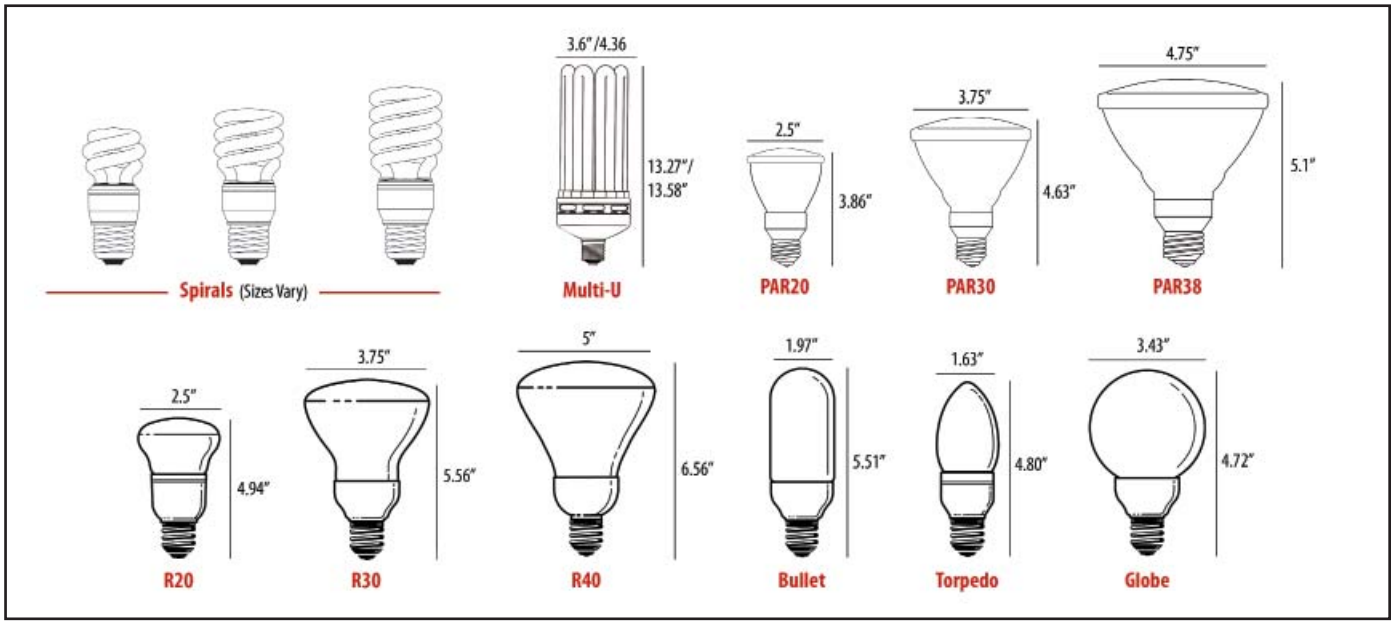

LINEAR FLUORESCENT

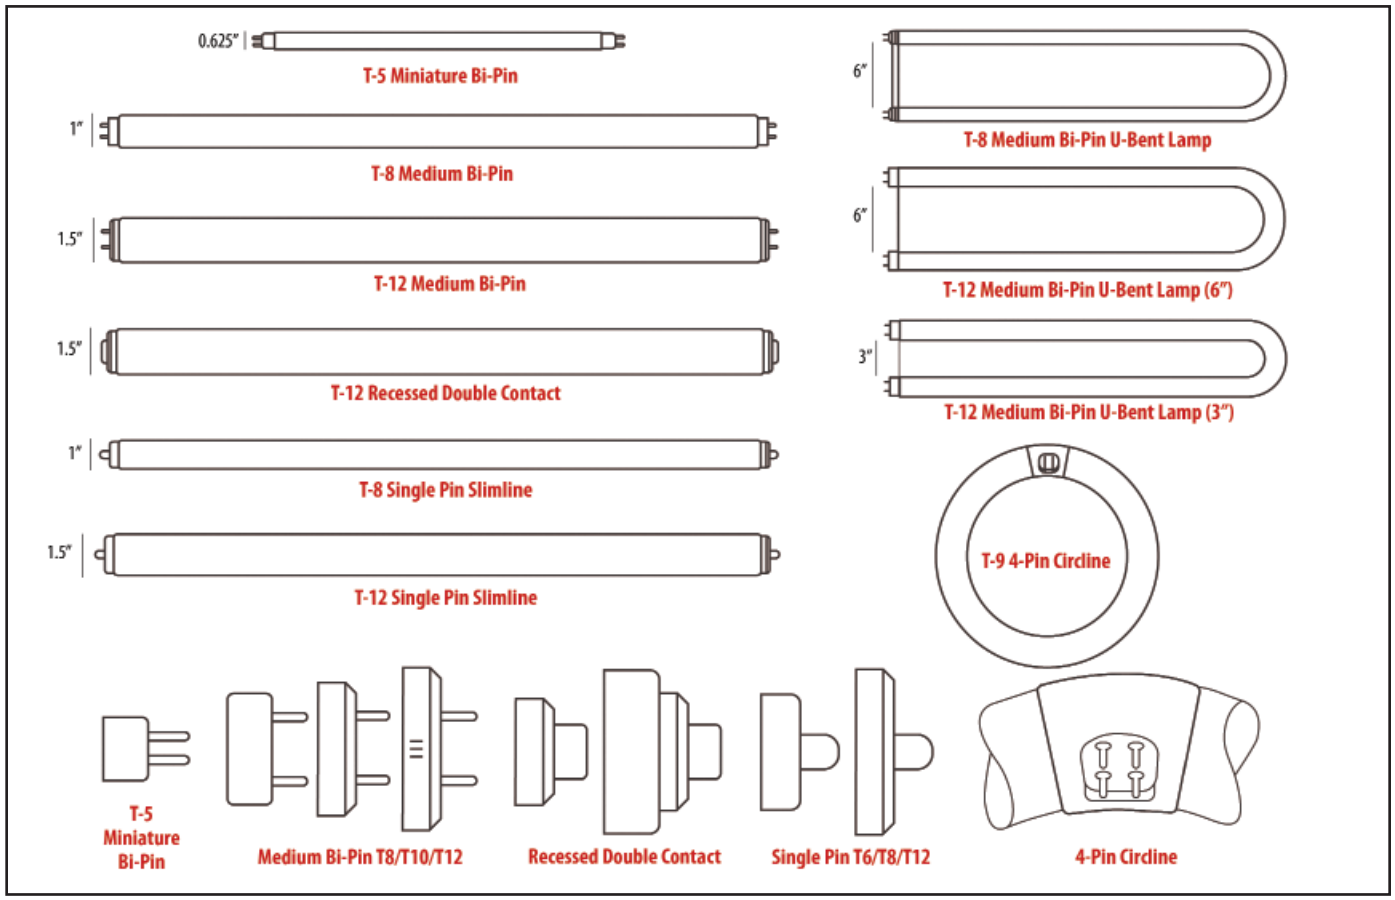

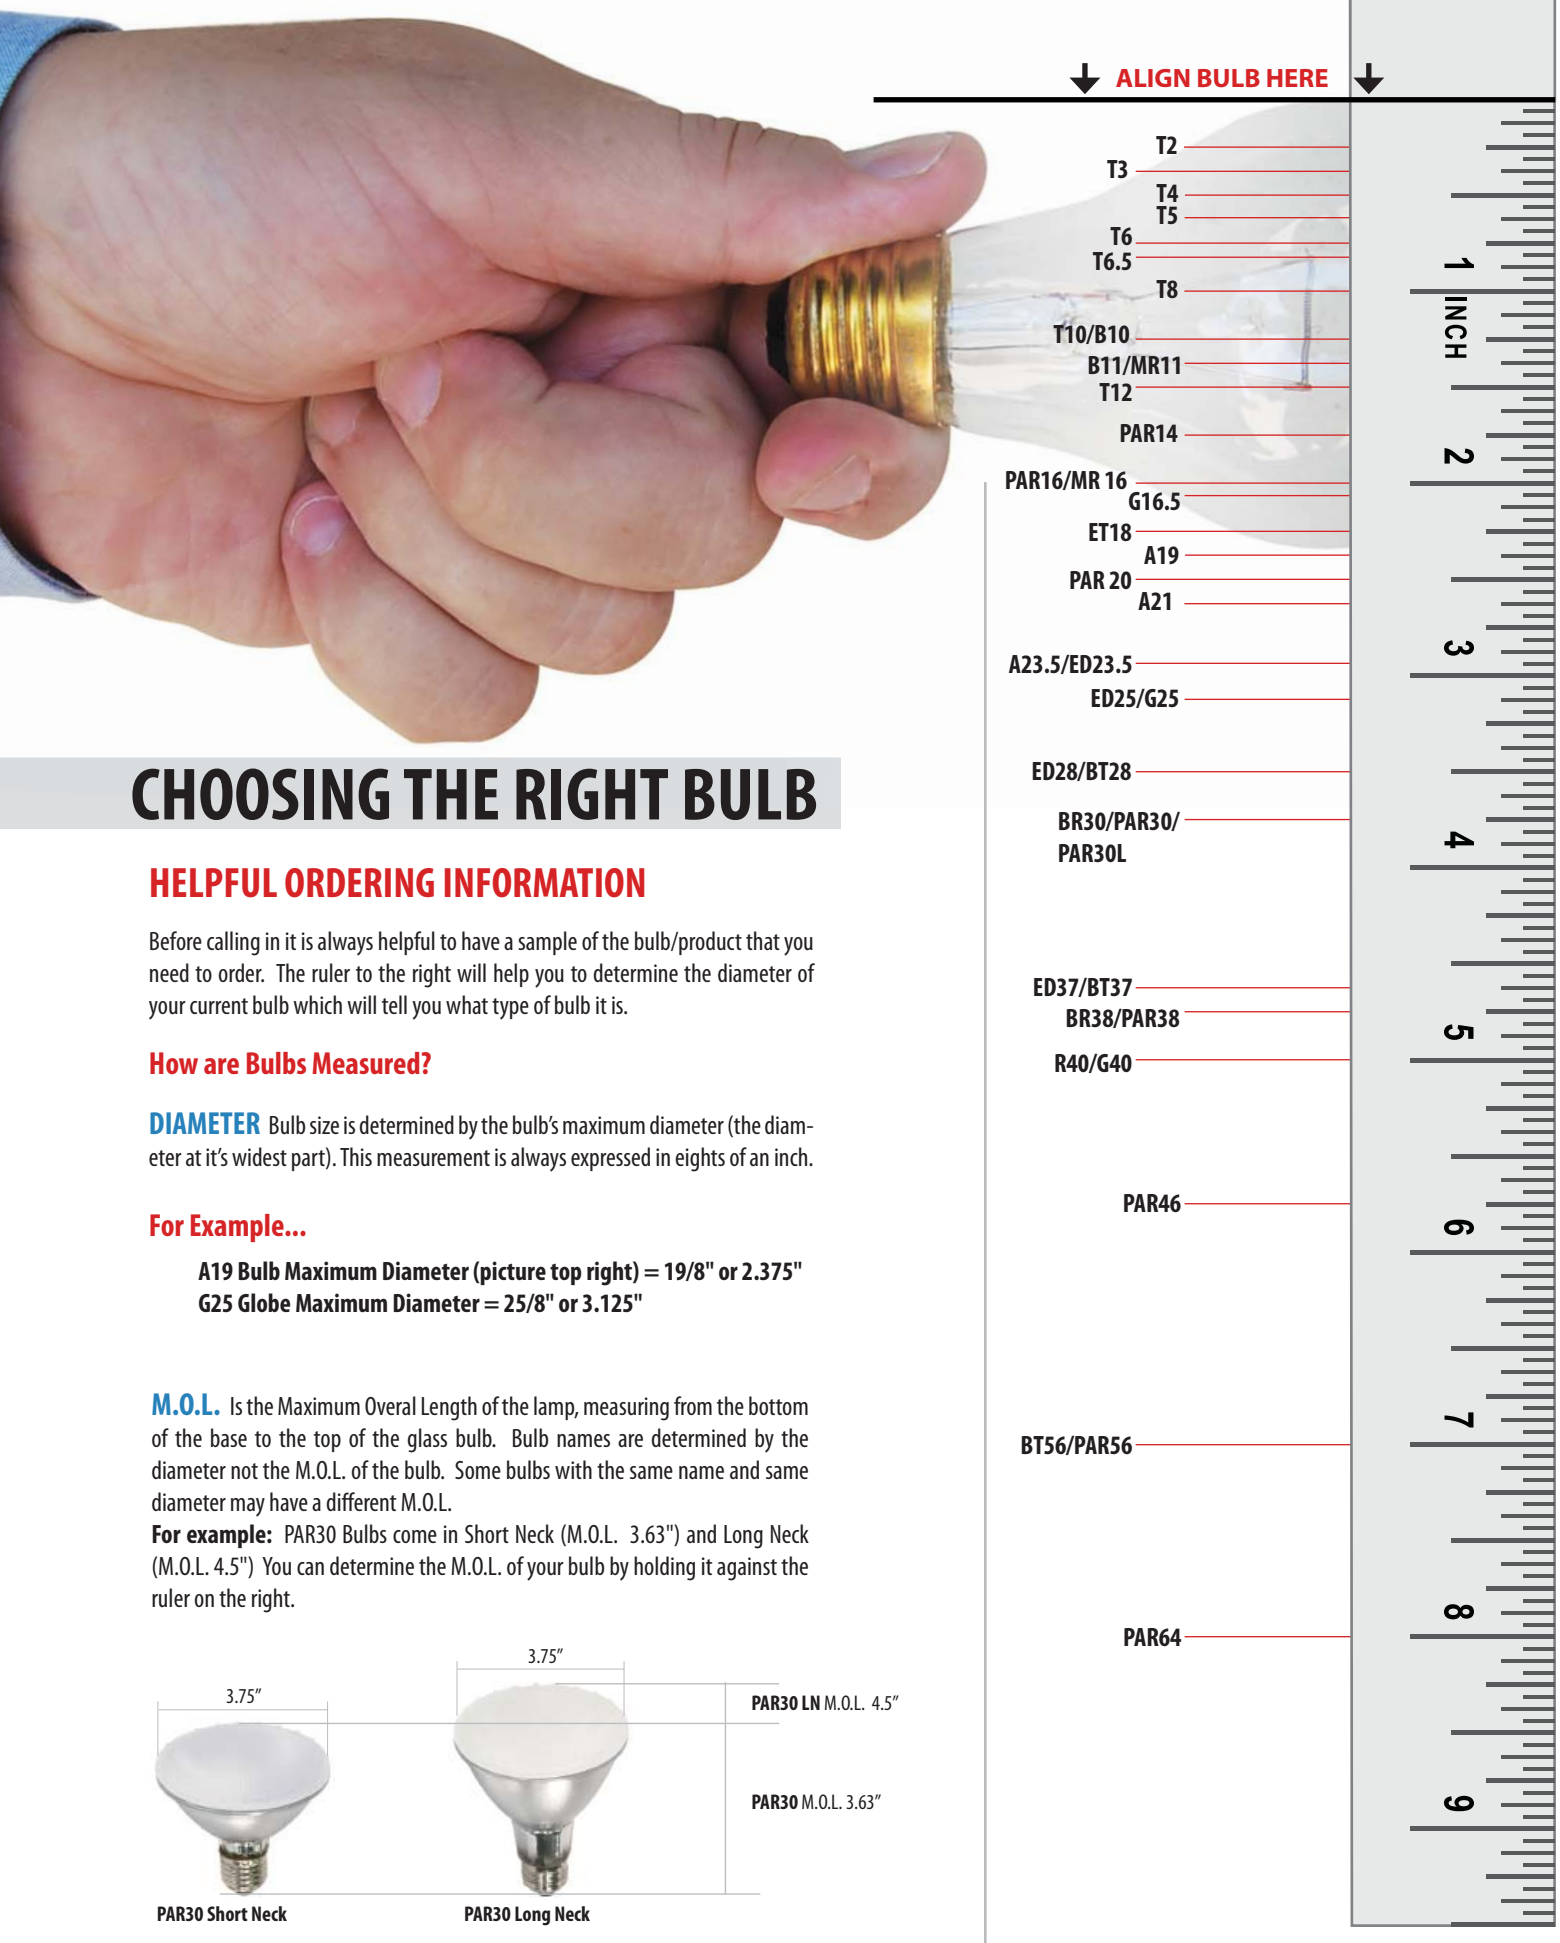

CHOOSING THE RIGHT BULB

HELPFUL ORDERING INFORMATION

Before calling in it is always helpful to have a sample of the bulb/product that you need to order. The ruler to the right will help you to determine the diameter of your current bulb which will tell you what type of bulb it is.

How are Bulbs Measured?

DIAMETER Bulb size is determined by the bulb's maximum diameter (the diameter at it's widest part). This measurement is always expressed in eights of an inch.

For Example...

A19 Bulb Maximum Diameter (picture top right) = 19/8" or 2.375"
G25 Globe Maximum Diameter = 25/8" or 3.125"

M.O.L. Is the Maximum Overal Length of the lamp, measuring from the bottom of the base to the top of the glass bulb. Bulb names are determined by the diameter not the M.O.L. of the bulb. Some bulbs with the same name and same diameter may have a different M.O.L.

For example: PAR30 Bulbs come in Short Neck (M.O.L. 3.63") and Long Neck (M.O.L. 4.5") You can determine the M.O.L. of your bulb by holding it against the ruler on the right.

CHOOSING THE RIGHT BULB BASE SIZES

Place your bulb over the pictures below until you find the closest match

E26/Medium

E17/Intermediate

E14/Euro

E12/Candelabra

E39/Mogul

BA15s/Bayonet

BA15d/Bayonet

E11/Mini Can

T5 Bi-Pin

T6 Single Pin

T8 Bi-Pin

T12 RDC

T12 Bi-Pin

T8 Single Pin

T8 RDC

GU10

GU24

G4

G5.3

G6.35

G8

G8.5

G9

G12

CATALOG AT A GLANCE

GENERAL SERVICE BULBS PAGE 13

APPLIANCE BULBS PAGE 16

REFLECTORS PAGE 17

DECORATIVE BULBS PAGE 20

LED PAGE 23

HALOGEN LAMPS PAGE 26

HALOGEN LAMPS Continued PAGE 28

COMPACT FLUORESCENT LAMPS PAGE 36

CATALOG AT A GLANCE

FLUORESCENT TUBES PAGE 51

HID LAMPS - METAL HALIDE - HIGH PRESSURE SODIUM - MERCURY VAPOR - LOW PRESSURE SODIUM PAGE 62

BALLASTS PAGE 76

SOCKETS, CONVERTERS, ADAPTORS PAGE 98

FIXTURES PAGE 115

LANDSCAPE LIGHTING PAGE 143

POLES AND POSTS PAGE 150

ACCESSORIES PAGE 156

INCANDESCENT LAMPS

CONTENTS

General Purpose.....13
Reflectors.....17
Decorative.....20
Specialty.....22

PROS

- Low Cost Initially
- Warm Color
- Easy Replacement

CONS

- Low Energy Efficiency
- Short Life
- High Heat

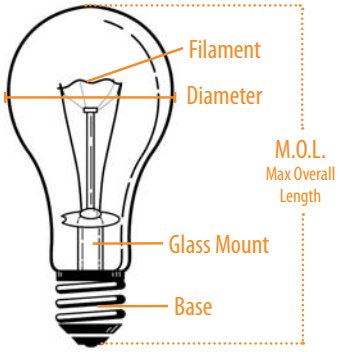

A15 Appliance • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
10176	**15A15/CL/130V**	15	Clear	130	95	2,500	3.5″	**120**
10177	**15A15/IF/130V**	15	Frost	130	90	2,500	3.5"	**120**
10178	**25A15/CL/130V**	25	Clear	130	130	2,500	3.5"	**25**
10179	**25A15/IF/130V**	25	Frost	130	120	2,500	3.5"	**25**
10180	**40A15/CL/130V**	40	Clear	130	290	2,500	3.5"	**25**
10181	**40A15/IF/130V**	40	Frost	130	280	2,500	3.5"	**25**
10182	**60A15/CL/130V**	60	Clear	130	580	2,500	3.5"	**25**
10183	**60A15/IF/130V**	60	Frost	130	530	2,500	3.5"	**25**

A15 Clear

A15 Frost

A19 • E26 / Medium Base

Philips GENERIC

Item #	Order Code	Brand	MFG#	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
10261	**40A/CL/130V**	Philips	13992-3	40	Clear	130	505	1,500	4.44"	**120**
10262	**40A/130V**	Philips	13993-1	40	Frost	130	490	1,500	4.44"	**120**
10263	**60A/CL/130V**	Philips	13994-9	60	Clear	130	900	1,000	4.44"	**120**
10264	**60A/130V**	Philips	13995-5	60	Frost	130	850	1,000	4.44"	**120**
10265	**75A/CL/130V**	Philips	13996-3	75	Clear	130	1,195	750	4.44"	**120**
10266	**75A/130V**	Philips	13997-1	75	Frost	130	1,150	750	4.44"	**120**
10267	**100A/CL/130V**	Philips	13998-9	100	Clear	130	1,615	750	4.44"	**120**
10268	**100A/130V**	Philips	13999-7	100	Frost	130	1,590	750	4.44"	**120**
10396	**25A19/CL/130V**	Generic	-	25	Clear	130	150	2,500	4.25"	**120**
10397	**25A19/IF/130V**	Generic	-	25	Frost	130	150	2,500	4.25"	**120**
10398	**40A19/CL/130V**	Generic	-	40	Clear	130	280	2,500	4.25"	**120**
10399	**40A19/IF/130V**	Generic	-	40	Frost	130	280	2,500	4.25"	**120**
10400	**60A19/CL/130V**	Generic	-	60	Clear	130	520	2,500	4.25"	**120**
10401	**60A19/IF/130V**	Generic	-	60	Frost	130	520	2,500	4.25"	**120**
10402	**75A19/CL/130V**	Generic	-	75	Clear	130	700	2,500	4.25"	**120**
10403	**75A19/IF/130V**	Generic	-	75	Frost	130	700	2,500	4.25"	**120**
10404	**100A19/CL/130V**	Generic	-	100	Clear	130	950	2,500	4.25"	**120**
10405	**100A19/IF/130V**	Generic	-	100	Frost	130	950	2,500	4.25"	**120**

A19 Clear

A19 Frost

INCANDESCENT LAMPS GENERAL SERVICE

A19 Rough Service • E26 / Medium Base

GENERIC

Item #	Order Code	MFG#	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
10726	**60A19/RS/130V**	-	60	Frost	130	780	2,500	4.25"	**20**
10727	**75A19/RS/130V**	-	75	Frost	130	1100	2,500	4.25"	**20**
10728	**100A19/RS/130V**	-	100	Frost	130	1150	2,500	4.25"	**20**

A19 Rough Service

A19 Yellow Bug • E26 / Medium Base

GENERIC

Item #	Order Code	MFG#	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
10837	**40A19/BUG/130V**	-	40	Yellow	130	-	2,000	4.13"	**24**
10838	**60A19/BUG/130V**	-	60	Yellow	130	-	2,000	4.13"	**24**
10840	**100A19/BUG/130V**	-	100	Yellow	130	-	2,000	4.13"	**24**

A19 Yellow Bug

A21 • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts @130V/120V	Finish	Volts	Lumens @130V/120V	Life (hrs) @130V/120V	M.O.L.	Pk. Qty.
11021	**100A21/277V**	13397	100	Frost	277	1,042	1,000	5.31"	**24**
11025	**100A21/130V**	12883	100/88	Frost	130	1,650/1,260	750/1,875	5.31"	**48**
11045	**150A21/CL/130V**	13148	150/132	Clear	130	2,730/2,030	750/1,875	5.31"	**48**
11046	**150A21/130V**	13153	150/132	Frost	130	2,670/2,030	750/1,875	5.31"	**48**
11049	**200A21/CL/130V**	15491	200/176	Clear	130	3,880/2,860	750/1,875	5.31"	**48**
11050	**200A21/130V**	15543	200/176	Frost	130	3,760/2,860	750/1,875	5.31"	**48**

130V Incandescents produce less light but last longer when operated @ 120V

A21 Clear

A21 • E26 / Medium Base

GENERIC

Item #	Order Code	MFG#	Watts @130V/120V	Finish	Volts	Lumens @130V/120V	Life (hrs) @130V/120V	M.O.L.	Pk. Qty.
11058	**150A21/CL/130V**	-	150/130	Clear	130	1,750/1,350	2,500/5,000	5.01"	**24**
11059	**150A21/IF/130V**	-	150/130	Frost	130	1,750/1,350	2,500/5,000	5.01"	**24**

130V Incandescents produce less light but last longer when operated @ 120V

A21 Frost

A21 Traffic Signal • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
11155	**69A21/TS/8M/130V**	12498	69	Clear	130	640	8,000	4.44"	**24**
11162	**116A21/TS/8M/130V**	12817	116	Clear	130	1,260	8,000	4.44"	**24**

A21 Traffic Signal

INCANDESCENT LAMPS GENERAL SERVICE

A21 3-Way • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts	Bulb	Volts	Base	Lumens	Life (hrs)	Pk. Qty.
11265	**30/100A21/W/RP/120V**	19385	30 70 100	A21	120	E26/ Medium	300lm 945lm 1245lm	1,200	**12**
11270	**50/150A21/W/RP/120V**	18060	50 100 150	A21	120	E26/ Medium	640lm 1570lm 2210lm	1,200	**12**

A21 3-Way White

PS25 3-Way • E39 / Mogul Base

Sylvania

Item #	Order Code	MFG#	Watts	Bulb	Volts	Base	Lumens	Life (hrs)	Pk. Qty.
11275	**100/300PS25/RP/120V**	14374	100 200 300	PS25	120	E39/ Mogul	1385lm 3540lm 4925ml	1,200	**12**

PS25 3-Way Frost

PS30 • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts 130V/120V	Finish	Volts	Lumens 130V/120V	Life (hrs) 130V/120V	M.O.L.	Pk. Qty.
11506	**300M/CL/130V**	15744	300/264	Clear	130	5,820/ 4,390	750/1,875	8.06″	**60**
11507	**300M/IF/130V**	15739	300/264	Frost	130	5,760/ 4,390	750/1,875	8.06″	**60**

130V Incandescents produce less light but last longer when operated @ 120V

PS30 Clear

PS30 Frost

PS35 • E39 / Mogul Base

Sylvania

Item #	Order Code	MFG#	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
11661	**300PS35/CL/120V**	15915	300	Clear	120	5,700	1,000	9.38″	**24**
11662	**300PS35/IF/120V**	15918	300	Frost	120	5,700	1,000	9.38″	**24**
11665	**500PS35/CL/130V**	16034	500	Clear	130	10,000	1,000	9.38″	**24**
11666	**500PS35/IF/130V**	16040	500	Frost	130	10,000	1,000	9.38″	**24**

PS35 Clear

PS35 Frost

INCANDESCENT LAMPS GENERAL SERVICE

Tubular / Exit Lamps

GENERIC

Item #	Order Code	Fig.	Watts	Finish	Bulb	Volts	Base	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
11907	**15T6/CL/145V**	A	15	Clear	T6	145	E12/Candelabra	80	2,000	3.06"	**25**
11910	**20T6.5/CL/INT/130V**	B	20	Clear	T6.5	130	E17/Intermediate	150	2,500	5.5"	**25**
11911	**20T6.5/CL/DC/130V**	C	20	Clear	T6.5	130	BA15d/D.C. Bayonette	150	2,500	5.56"	**25**
11920	**15T7/CL/DC/130V**	D	15	Clear	T7	130	BA15d/D.C. Bayonette	100	2,000	2.35"	**25**
11921	**15T7/CL/CAN/130V**	E	15	Clear	T7	130	E12/Candelabra	100	2,000	2.25"	**25**
11922	**15T7/CL/INT/130V**	F	15	Clear	T7	130	E17/Intermediate	100	2,000	2.35"	**25**

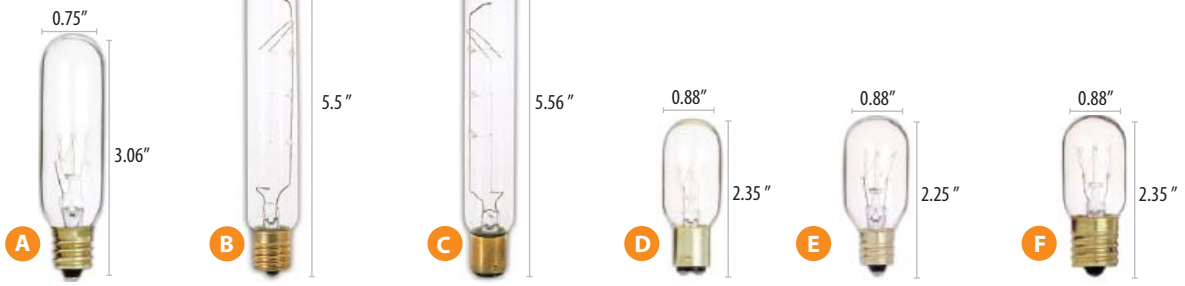

T10 / Picture Lamps • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Finish	Bulb	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
12106	**25T10/CL**	25	Clear	T10	180	2,500	5.19"	**25**
12107	**25T10/IF**	25	Frost	T10	180	2,500	5.19"	**25**
12110	**40T10/CL**	40	Clear	T10	280	2,500	5.19"	**25**
12111	**40T10/IF**	40	Frost	T10	280	2,500	5.19"	**25**
12114	**60T10/CL**	60	Clear	T10	420	2,500	5.19"	**25**
12115	**60T10/IF**	60	Frost	T10	420	2,500	5.19"	**25**

INCANDESCENT LAMPS GENERAL SERVICE - REFLECTORS

Sign / Indicator Lamps

GENERIC

Item #	Order Code	Fig.	Watts	Finish	Bulb	Volts	Base	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
12298	**6S6/CL/DC/130V**	A	6	Clear	S6	130	BA15d/D.C. Bayonette	30	1,500	1.88"	**25**
12299	**6S6/CL/CAN/130V**	B	6	Clear	S6	130	E12/Candelabra	30	1,500	1.88"	**25**
12301	**7.5S11/CL/130V**	C	7.5	Clear	S11	130	E26/Medium	40	1,500	2.25"	**25**
12310	**40S11N/CL/130V**	D	40	Clear	S11	130	E17/Intermediate	370	1,500	2.48"	**25**
12315	**11S14/CL/130V**	E	11	Clear	S14	130	E26/Medium	80	1,500	3.5"	**25**
12316	**11S14/IF/130V**	F	11	Frost	S14	130	E26/Medium	75	1,500	3.5"	**25**
12730	**7C7/CL/130V**	G	7	Clear	C7	130	E12/Candelabra	40	1,000	2.12"	**25**

S6
BA15d Base
Clear

S6
E12/Candelabra Base
Clear

S11
E26 / Medium Base
Clear

S11
E17/Intermediate Base
Clear

S14
E26 / Medium Base
Clear

S14
E26 / Medium Base
Frost

C7
E12/Candelabra Base
Clear

R12 - R14 - R16 Reflectors

GENERIC

Item #	Order Code	Fig.	Watts	Bulb	Finish	Volts	Base	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
13721	**1383**	A	20	R12	Frost	13	BA15d/SC Bayonet	200	300	2.6"	**10**
13724	**25R14/FL/INT**	B	25	R14	Frost	120/130	E17/Intermediate	135	1,500	2.63"	**25**
13725	**40R14/FL/INT**	B	40	R14	Frost	120/130	E17/Intermediate	280	1,500	2.63"	**25**
13726	**25R14/FL/MED**	C	25	R14	Frost	120/130	E26/Medium	135	1,500	2.63"	**25**
13727	**40R14/FL/MED**	C	40	R14	Frost	120/130	E26/Medium	280	1,500	2.63"	**25**
13728	**25R14SN/FL/MED**	D	25	R14	Frost	120/130	E26/Medium	135	1,500	2.25"	**25**
13729	**40R14SN/FL/MED**	D	40	R14	Frost	120/130	E26/Medium	280	1,500	2.25"	**25**
13730	**40R16/FL/MED**	E	40	R16	Frost	120/130	E26/Medium	280	1,500	3.44"	**25**

R12
BA15d/SC Bayonet Base

R14
E17/Intermediate Base

R14
E26 / Medium Base

R14 Shortneck
E26 / Medium Base

R16
E26/Medium Base

INCANDESCENT LAMPS GENERAL SERVICE - REFLECTORS

R20 Reflectors • E26 / Medium Base

Philips Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts @130V/120V	Finish	Volts	Lumens @130V/120V	Life (hrs) @130V/120V	M.O.L.	Pk. Qty.
13932	**45R20/FL/130V**	Philips	20324-0	45/*	Frost	130	380/*	2,000/*	3.94"	**12**
13972	**30R20/130V**	Sylvania	14802	30/26	Frost	130	140/100	2,000/5,000	3.94"	**60**
13975	**45R20/130V**	Sylvania	15699	45/40	Frost	130	295/220	2,000/5,000	3.94"	**60**
13992	**45R20/FL/130V**	Generic	13992	45/*	Frost	130	275/*	2,000/*	3.94"	**12**

130V Incandescents produce less light but last longer when operated @ 120V
* Ratings not available

R20

BR30 Reflectors • E26 / Medium Base

Sylvania GENERIC

Item #	Order Code	Fig.	Brand	MFG#	Watts @130V/120V	Finish	Volts	Lumens @130V/120V	Life (hrs) @130V/120V	M.O.L.	Pk. Qty.
14241	**65BR30/FL/120V**	A	Sylvania	15165	65	Frost	120	620	2,000	5.38"	**24**
14242	**65BR30/FL/130V**	A	Sylvania	13129	65/57	Frost	130	620/470	2,000/5,000	5.38"	**24**
14245	**65BR30/PK/RP/120V**	B	Sylvania	15153	65	Pink	120	-	2,000	5.38"	**6**
14261	**65BR30/FL/130V**	A	Generic	-	65	Frost	130	580	2,000	5.38"	**12**
14265	**75BR30/AMBER/FL/130V**	C	Generic	-	75	Amber	130	-	2,000	5.13"	**12**

130V Incandescents produce less light but last longer when operated @ 120V

BR30 Frost

BR30 Pink

BR30 Amber

BR40 Reflector • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
15051	**65BR/FL/130V**	15292	65	Frost	130	540	2,000	6.5"	**24**

BR40 Frost

INCANDESCENT LAMPS GENERAL SERVICE - REFLECTORS

PAR38 Reflector • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts @130V/120V	Finish	Volts	Lumens @130V/120V	Life (hrs) @130V/120V	M.O.L.	Pk. Qty.
15312	**65PAR/FL/130V**	13805	65/57	Clear	130	715/540	1,750/4,375	5.31"	**15**
15314	**150PAR/FL/130V**	13922	150/132	Clear	130	2,175/1,660	750/1,875	5.31"	**15**

130V Incandescents produce less light but last longer when operated @ 120V

PAR 38 Clear

PAR38 Colored Reflector • E26 / Medium Base

GE

Item #	Order Code	MFG#	Watts	Finish	Volts	Life (hrs)	M.O.L	Pk. Qty.
15411	**100PAR/R/85WM/120V**	13472	85	Red	120	2,000	5.31"	**6**
15412	**100PAR/Y/85WM/120V**	13473	85	Yellow	120	2,000	5.31"	**6**
15413	**100PAR/G/85WM/120V**	13474	85	Green	120	2,000	5.31"	**6**
15414	**100PAR/B/85WM/120V**	13465	85	Blue	120	2,000	5.31"	**6**

PAR 38 Red

PAR 46 / PAR 56

Sylvania

Item #	Order Code	Fig.	MFG#	Watts	Bulb	Finish	Volts	Base	Lumens	Life (hrs)	M.O.L	Dia.	Pk. Qty.
15526	**200PAR46/3MFL/125V**	A	15196	200	PAR 46	Clear	125	Medium Side Prong	2,270	2,000	4.00″	5.75″	**12**
15530	**300PAR56/MFL/130V**	B	14946	300	PAR 56	Clear	130	Mogul End Prong	3,840	2,000	5.00″	7″	**12**

A

PAR 46

B

PAR 56

R40 / BR40 Heat Lamps • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Bulb	Finish	Volts	Life (hrs)	M.O.L.	Pk. Qty.
15856	**250BR40/CL/HEAT**	250	BR40	Clear	120	6,000	6.56"	**12**
15857	**250R40/RED/HEAT**	250	R40	Red	120	5,000	6.56"	**12**
15860	**375R40/CL/HEAT**	375	R40	Clear	120	5,000	6.56"	**12**

R40 / BR40 Clear



R40 Red

INCANDESCENT LAMPS DECORATIVE - GLOBES

G16.5 Globe • E12 / Candelabra Base

GENERIC

Item #	Order Code	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
16266	**15G16.5/CL/130V**	15	Clear	130	95	2,500	3"	**25**
16267	**15G16.5/WH/130V**	15	White	130	80	2,500	3"	**25**
16268	**25G16.5/CL/130V**	25	Clear	130	220	2,500	3"	**25**
16269	**25G16.5/WH/130V**	25	White	130	170	2,500	3"	**25**
16270	**40G16.5/CL/130V**	40	Clear	130	370	2,500	3"	**25**
16271	**40G16.5/WH/130V**	40	White	130	320	2,500	3"	**25**
16272	**60G16.5/CL/130V**	60	Clear	130	650	2,500	3"	**25**
16273	**60G16.5/WH/130V**	60	White	130	560	2,500	3"	**25**

G16.5 Clear

G16.5 White

G25 Globe • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
16576	**25G25/CL/130V**	25	Clear	130	150	2,500	4.5"	**10**
16577	**25G25/WH/130V**	25	White	130	140	2,500	4.5"	**10**
16578	**40G25/CL/130V**	40	Clear	130	300	2,500	4.5"	**10**
16579	**40G25/WH/130V**	40	White	130	270	2,500	4.5"	**10**
16580	**60G25/CL/130V**	60	Clear	130	550	2,500	4.5"	**10**
16581	**60G25/WH/130V**	60	White	130	480	2,500	4.5"	**10**
16582	**100G25/CL/130V**	100	Clear	130	1,100	2,500	4.5"	**10**
16583	**100G25/WH/130V**	100	White	130	950	2,500	4.5"	**10**

G25 Clear

G25 White

G40 Globes • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk .Qty.
16746	**40G40/CL**	40	Clear	120/130	260	1,500	6.75"	**6**
16747	**40G40/WH**	40	White	120/130	240	1,500	6.75"	**6**
16748	**60G40/CL**	60	Clear	120/130	520	1,500	6.75"	**6**
16749	**60G40/WH**	60	White	120/130	450	1,500	6.75"	**6**
16750	**100G40/CL**	100	Clear	120/130	1100	1,500	6.75"	**6**
16751	**100G40/WH**	100	White	120/130	950	1,500	6.75"	**6**
16752	**150G40/CL**	150	Clear	120/130	1600	1,500	6.75"	**6**
16753	**150G40/WH**	150	White	120/130	1300	1,500	6.75"	**6**

G40 Clear

G40 White

INCANDESCENT LAMPS DECORATIVE - CHANDELIER

Chandelier Flame Tip • E12 / Candelabra Base GENERIC

Item #	Order code	Watts	Bulb	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
16906	**15CFC/130V**	15	CA10	Clear	130	95	2,500	4.12″	**25**
16907	**15CFF/130V**	15	CA10	Frost	130	90	2,500	4.12″	**25**
16908	**25CFC/130V**	25	CA10	Clear	130	210	2,500	4.12″	**25**
16909	**25CFF/130V**	25	CA10	Frost	130	200	2,500	4.12″	**25**
16910	**40CFC/130V**	40	CA10	Clear	130	370	2,500	4.12″	**25**
16911	**40CFF/130V**	40	CA10	Frost	130	350	2,500	4.12″	**25**
16912	**60CFC/130V**	60	CA10	Clear	130	642	2,500	4.12″	**25**
16913	**60CFF/130V**	60	CA10	Frost	130	635	2,500	4.12″	**25**

CA10 Clear

CA10 Frost

Chandelier Flame Tip • E26 / Medium Base GENERIC

Item #	Order Code	Watts	Bulb	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
17066	**25MFC/130V**	25	CA10	Clear	130	210	2,500	4.12″	**25**
17067	**25MFF/130V**	25	CA10	Frost	130	200	2,500	4.12″	**25**
17068	**40MFC/130V**	40	CA10	Clear	130	370	2,500	4.12″	**25**
17069	**40MFF/130V**	40	CA10	Frost	130	360	2,500	4.12″	**25**
17070	**60MFC/130V**	60	CA10	Clear	130	650	2,500	4.12″	**25**
17071	**60MFF/130V**	60	CA10	Frost	130	640	2,500	4.12″	**25**

CA10 Clear

CA10 Frost

Chandelier Torpedo Tip • E12/Candelabra Base GENERIC

Item #	Order Code	Watts	Bulb	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk. Qty.
17224	**15CTC/130V**	15	B10	Clear	130	95	2,500	3.88″	**25**
17226	**25CTC/130V**	25	B10	Clear	130	220	2,500	3.88″	**25**
17227	**25CTF/130V**	25	B10	Frost	130	220	2,500	3.88″	**25**
17228	**40CTC/130V**	40	B10	Clear	130	384	2,500	3.88″	**25**
17229	**40CTF/130V**	40	B10	Frost	130	384	2,500	3.88″	**25**
17230	**60CTC/130V**	60	B10	Clear	130	642	2,500	3.88″	**25**
17231	**60CTF/130V**	60	B10	Frost	130	642	2,500	3.88″	**25**

B10 Clear

B10 Frost

Chandelier Torpedo Tip • E26 / Medium Base GENERIC

Item #	Order Code	Watts	Bulb	Finish	Volts	Lumens	Life (hrs)	M.O.L.	Pk . Qty.
17386	**25MTC/130V**	25	B10	Clear	130	210	2,500	3.88"	**25**
17387	**25MTF/130V**	25	B10	Frost	130	200	2,500	3.88"	**25**
17388	**40MTC/130V**	40	B10	Clear	130	370	2,500	3.88"	**25**
17389	**40MTF/130V**	40	B10	Frost	130	360	2,500	3.88"	**25**
17390	**60MTC/130V**	60	B10	Clear	130	650	2,500	3.88"	**25**
17391	**60MTF/130V**	60	B10	Frost	130	640	2,500	3.88"	**25**

B10 Clear

B10 Frost

INCANDESCENT LAMPS SPECIALTY

A19 12 Volts • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Bulb	Finish	Volts	Lumens	M.O.L.	Life (hrs)	Pk. Qty.
18275	**25A19/IF/12V**	25	A19	Frost	12	240	4.25"	2,000	**12**
18280	**50A19/IF/12V**	50	A19	Frost	12	580	4.25"	1,500	**12**

A19 Frosted

Tuff Coat Incandescent Lamps

GENERIC

Item #	Order Code	Fig.	Watts	Bulb	Finish	Volts	Base	M.O.L.	Pk. Qty.
18846	**40A15/TC/130**	A	40	A15	Silicone Coated	130	E26/Medium	3.5"	**20**
18847	**60A15/TC/130**	A	60	A15	Silicone Coated	130	E26/Medium	3.5"	**20**
18848	**40MTF/TC/130**	B	40	B10	Silicone Coated	130	E26/Medium	3.88"	**25**
18849	**60MTF/TC/130**	B	60	B10	Silicone Coated	130	E26/Medium	3.88"	**25**
18851	**25A19/TC/130**	C	25	A19	Silicone Coated	130	E26/Medium	4.25"	**20**
18852	**40A19/TC/130**	C	40	A19	Silicone Coated	130	E26/Medium	4.25"	**20**
18853	**60A19/TC/130**	C	60	A19	Silicone Coated	130	E26/Medium	4.25"	**20**
18854	**75A19/TC/130**	C	75	A19	Silicone Coated	130	E26/Medium	4.25"	**20**
18855	**100A19/TC/130**	C	100	A19	Silicone Coated	130	E26/Medium	4.25"	**20**
18858	**1383/TC**	D	20	R12	Silicone Coated	13	BA9S/S.C BAY.	2.6″	**10**
18862	**65BR30/TC/130**	E	65	BR30	Silicone Coated	130	E26/Medium	5.37"	**24**
18869	**250BR40/TC/120**	F	250	BR40	Silicone Coated	120	E26/Medium	6.56"	**12**

A15

B10

A19

R12

BR30

BR40

LED LAMPS

The long life and high efficiency of LED Lamps make them an ideal solution for general lighting and hard to reach lighting fixtures.

- Mercury Free
- Energy Efficient - GREEN
- Very Long Life
- Durable

Flame Tip • E12 / Candelabra Base

GE

Item #	Order Code	MFG#	Watts	Lumens	Color Temp.	Color.	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
18975	**LED2CAC/CLR**	78823	2	60	2,900K	Warm White	4.1"	1.25"	12,000	**48**

MR16 • GU10 Base

GE

Item #	Order Code	MFG#	Watts	Lumens	Color Temp.	Color	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
18985	**LED4GU10/NFL**	75625	4	100	3,050	Warm White	2.13"	2"	15,000	**3**

PAR 20 • E26 / Medium Base

GE

Item #	Order Code	MFG#	Watts	Lumens	Color Temp.	Color	Beam Spread	Beam Angle	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
18990	**LED7P20/B/827/20**	75353	7	200	2,700K	Warm White	Narrow Flood	20	3.93"	2.5"	30,000	**6**

PAR 30 / PAR 30 Long • E26 / Medium Base

GE

Item #	Order Code	MFG#	Watts	Lumens	Color Temp.	Color	Beam Spread	Beam Angle	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
18995	**LED10P30/827/24**	76144	10	320	2,700K	Warm White	Narrow Flood	24	3.62"	3.75"	25,000	**6**
19000	**LED10P30LS827/24**	76145	10	320	2,700K	Warm White	Narrow Flood	24	4.75"	3.75"	25,000	**6**

LED LAMPS

A Lamp • E26 / Medium Base

OMEGA

Item #	Order Code	Watts	Color Temp.	Color	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19101	**LEDA/10W/WW**	10	3,000K-4,000K	Warm White	4.46"	2.66"	50,000	**EA**
19102	**LEDA/10W/NW**	10	5,000K-6,000K	Natural White	4.46"	2.66"	50,000	**EA**

MR16 • G5.3 Base

OMEGA

Item #	Order Code	Watts	Color	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19109	**LEDMR16/3X1W/WW**	3	Warm White	2"	2"	25,000	**EA**
19111	**LEDMR16/3X1W/NW**	3	Natural White	2"	2"	25,000	**EA**

MR16 • GU10 Base

OMEGA

Item #	Order Code	Watts	Color.	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19120	**LEDMR16/GU10/FL/WW**	3	Warm White	2.12"	2"	25,000	**EA**
19122	**LEDMR16/GU10/FL/NW**	3	Natural White	2.12"	2"	25,000	**EA**

MR16 • G5.3 Base

OMEGA

Item #	Order Code	Watts	Color	Beam Spread	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19175	**LEDMR16/5W/SP/WW**	5	Warm White	Spot	1.88"	2"	25,000	**EA**
19176	**LEDMR16/5W/SP/NW**	5	Natural White	Spot	1.88"	2"	25,000	**EA**
19185	**LEDMR16/5W/FL/WW**	5	Warm White	Flood	1.88"	2"	25,000	**EA**
19186	**LEDMR16/5W/FL/NW**	5	Natural White	Flood	1.88"	2"	25,000	**EA**

LED LAMPS

R20 • E26 / Medium Base

DIMMABLE OMEGA

Item #	Order Code	Watts	Color	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19190	**LEDR20/WW**		Warm White	4.05"	2.5"	50,000	**EA**

R30 • E26 / Medium Base

DIMMABLE OMEGA

Item #	Order Code	Watts	Color	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19195	**LEDR30/WW**	10	Warm White	5.70"	3.66"	50,000	**EA**

PAR 38 • E26 / Medium Base

OMEGA

Item #	Order Code	Watts	Color Temp.	Color	CRI	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
19205	**LEDPAR38/WW**	10	3,000K - 4,000K	Warm White	70	4.7"	5.35"	50,000	**EA**
19206	**LEDPAR38/NW**	10	5,000K - 6,000K	Natural White	70	4.7"	5.35"	50,000	**EA**

T8 Tubes • G13/Medium Bi-Pin Base

OMEGA

Item #	Order Code	Watts	Lumens	Volts	Color Temp.	Color	M.O.L.	Life (hrs)	Pk. Qty.
19255	**LEDT8/2FT/WW/120**	9.5	600	120	3,000K-4,000K	Warm White	2 Ft.	50,000	**EA**
19256	**LEDT8/2FT/WW/277**	9.5	600	277	3,000K-4,000K	Warm White	2 Ft.	50,000	**EA**
19260	**LEDT8/2FT/NW/120**	9.5	600	120	5,000K-6,000K	Natural White	2 Ft.	50,000	**EA**
19261	**LEDT8/2FT/NW/277**	9.5	600	277	5,000K-6,000K	Natural White	2 Ft.	50,000	**EA**
19270	**LEDT8/4FT/WW/120**	20.29	1299	120	3,000K-4,000K	Warm White	4 Ft.	50,000	**EA**
19271	**LEDT8/4FT/WW/277**	20.29	1299	277	3,000K-4,000K	Warm White	4 Ft.	50,000	**EA**
19275	**LEDT8/4FT/NW/120**	20.29	1299	120	5,000K-6,000K	Natural White	4 Ft.	50,000	**EA**
19276	**LEDT8/4FT/NW/277**	20.29	1299	277	5,000K-6,000K	Natural White	4 Ft.	50,000	**EA**

- No glass or filaments to break
- No Ballast Required
- UL Listed

HALOGEN LAMPS

CONTENTS

MR 11/ MR 16 28
ALR 12 Reflector 31
PAR Lamps 31
Double Ended Quartz 35

PROS

- Bright White Light
- Long Life
- Energy Efficient
- Good Beam Control

CONS

- Generates High Heat
- Higher Initial Cost

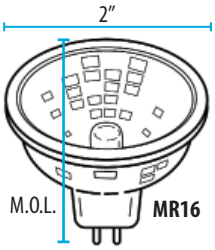

Meassurement

Letters indicate the shape of the bulb and numbers indicate the diameter of the lamp in 1/8 inches. Ex; An MR16 mini reflector has a diameter of 16/8″ or 2″.

Bi-Pin Base Designation

The spacing (expressed in mm) in between the two pins. For Example:
A GU 5.3 Base = 5.3 mm.

JC Bi-Pin - 12 Volt • G4 & G6.35 Base

GENERIC

Item #	Order Code	Watts	Bulb	Volts	Base	Lumens	M.O.L.	Dia.	Life (Hrs)	Pk. Qty.
20086	**JC5/12V**	5	T3	12	G4	80	1.30″	0.38″	2,000	**10**
20088	**JC10/12V**	10	T3	12	G4	160	1.30″	0.38″	2,000	**10**
20090	**JC20/12V**	20	T3	12	G4	350	1.30″	0.38″	2,000	**10**
20092	**JC35/12V**	35	T4	12	G4	595	1.58″	0.38″	2,000	**10**
20095	**JC10/12V/XENON**	10	T3	12	G4	120	1.25″	0.38″	10,000	**10**
20096	**JC20/12V/XENON**	20	T3	12	G4	250	1.25″	0.38″	10,000	**10**
20102	**JC20/12V/G6.35**	20	T4	12	G6.35	300	1.73"	0.5″	2,000	**10**
20104	**JC35/12V/G6.35**	35	T4	12	G6.35	595	1.73"	0.5″	2,000	**10**
20106	**JC50/12V/G6.35**	50	T4	12	G6.35	900	1.73"	0.5″	2,000	**10**
20108	**JC75/12V/G6.35**	75	T4	12	G6.35	1350	1.81"	0.5″	2,000	**10**
20110	**JC100/12V/G6.35**	100	T4	12	G6.35	2100	1.81"	0.5″	2,000	**10**

To match your exact base **go to page 10**

T3/T4
G4/G6.35

JCD Bi-Pin - 130 Volt • GY6.35 Base

GENERIC

Item #	Order Code	Watts	Bulb	Volts	Base	Lumens	M.O.L.	Dia.	Life (Hrs)	Pk. Qty.
20211	**JCD20/130V**	20	T4	130	GY6.35	180	1.81″	0.5″	2,000	**10**
20213	**JCD35/130V**	35	T4	130	GY6.35	350	1.81″	0.5″	2,000	**10**
20215	**JCD50/130V**	50	T4	130	GY6.35	600	1.81″	0.5″	2,000	**10**
20217	**JCD75/130V**	75	T4	130	GY6.35	980	1.81″	0.5″	2,000	**10**
20219	**JCD100/130V**	100	T4	130	GY6.35	1,400	2.09″	0.5″	2,000	**10**

T4
GY6.35

G8 Bi-Pin - 130 Volt • G8 Base

GENERIC

Item #	Order Code	Watts	Bulb	Volts	Base	Lumens	M.O.L.	Dia.	Life (Hrs)	Pk. Qty.
20221	**JCD20/G8/130V**	20	T4	130	G8	180	1.77"	0.5″	2,000	**10**
20223	**JCD20/G8/S/130V**	20	T4	130	G8	180	1.59″	0.5″	2,000	**10**
20225	**JCD35/G8/130V**	35	T4	130	G8	350	1.77"	0.5″	2,000	**10**
20227	**JCD50/G8/130V**	50	T4	130	G8	600	1.77"	0.5″	2,000	**10**
20229	**JCD100/G8/130V**	100	T4	130	G8	1,400	1.77"	0.5″	2,000	**10**

T4 G8

HALOGEN LAMPS DOUBLE LOOP / SINGLE ENDED

JCD Double Loop - 130 Volt • G9 / Bi-Pin Base GENERIC

Item #	Order Code	Watts	Bulb	Base	Finish	Lumens	M.O.L.	Life (Hrs)	Pk. Qty.
20346	**JCD25/G9/130V**	25	T4	G9	Clear	280	1.65"	2,000	**10**
20347	**JCD25/G9/FR/130V**	25	T4	G9	Frosted	280	1.65"	2,000	**10**
20348	**JCD40/G9/130V**	40	T4	G9	Clear	480	1.65"	2,000	**10**
20349	**JCD40/G9/FR/130V**	40	T4	G9	Frosted	450	1.65"	2,000	**10**
20350	**JCD60/G9/130V**	60	T4	G9	Clear	780	1.65"	2,000	**10**
20351	**JCD60/G9/FR/130V**	60	T4	G9	Frosted	750	1.65"	2,000	**10**

T4 Clear

T4 Frosted

JD Single Ended - 130 Volt • Ba15d / Double Contact Base GENERIC

Item #	Order Code	Watts	Bulb	Base	Finish	Lumens	M.O.L.	Life (Hrs)	Pk. Qty.
20496	**JD35/DC/130V**	35	T4	BA15d	Clear	380	1.97″	2,000	**10**
20498	**JD50/DC/130V**	50	T4	BA15d	Clear	750	1.97″	2,000	**10**
20500	**JD75/DC/130V**	75	T4	BA15d	Clear	1,250	2.4″	2,000	**10**
20502	**JD100/DC/130V**	100	T4	BA15d	Clear	1,700	2.4″	2,000	**10**
20504	**JD150/DC/130V**	150	T4	BA15d	Clear	2,400	2.4″	2,000	**10**
20506	**JD250/DC/130V**	250	T4	BA15d	Clear	4,500	2.76″	2,000	**10**
20510	**JD500/DC/130V**	500	T4	BA15d	Clear	8,500	3.98″	2,000	**10**

T4 / BA15D

JD Single Ended - 130 Volt • E11 / Mini Candelabra Screw Base GENERIC

Item #	Order Code	Watts	Bulb	Base	Finish	Lumens	M.O.L.	Life (Hrs)	Pk. Qty.
20656	**JD35/MC/130V**	35	T4	E11	Clear	380	2.21″	2,000	**10**
20658	**JD50/MC/130V**	50	T4	E11	Clear	750	2.21″	2,000	**10**
20660	**JD75/MC/130V**	75	T4	E11	Clear	1,250	2.68″	2,000	**10**
20662	**JD100/MC/130V**	100	T4	E11	Clear	1,700	2.68″	2,000	**10**
20664	**JD150/MC/130V**	150	T4	E11	Clear	2,400	2.72″	2,000	**10**
20666	**JD250/MC/130V**	250	T4	E11	Clear	4,500	3.15″	2,000	**10**
20668	**JD400/MC/130V**	400	T4	E11	Clear	7,400	3.27″	2,000	**10**
20670	**JD500/MC/130V**	500	T4	E11	Clear	8,500	3.66″	2,000	**10**

T4 / E11

HALOGEN LAMPS MR11 / MR16 - 12 VOLT REFLECTORS

MR11 Covered Glass • G4 / Bi-Pin Base

GENERIC

Item #	Order Code	ANSI	Volts	Watts	Beam Angle	Beam Spread	Volts	M.O.L.	Life (Hrs)	Pk. Qty.
21257	**20MR11/NSP/CG/FTB**	FTB	12	20	10	N. Spot	12	1.38"	2,000	**20**
21259	**20MR11/SP/CG/FTC**	FTC	12	20	20	Spot	12	1.38"	2,000	**20**
21261	**20MR11/NFL/CG/FTD**	FTD	12	20	30	N. Flood	12	1.38"	2,000	**20**
21262	**35MR11/NSP/CG/FTE**	FTE	12	35	10	N. Spot	12	1.38"	2,000	**20**
21265	**35MR11/SP/CG/FTF**	FTF	12	35	20	Spot	12	1.38"	2,000	**20**
21267	**35MR11/NFL/CG/FTH**	FTH	12	35	30	N. Flood	12	1.38"	2,000	**20**

Base designation describes the distance between both pins, taken from the center of each pin. Expressed in milimeters. Example; GU4 Base = 4mm spacing.

MR11 GU4

MR16 Open Constant Color • GX5.3 / Bi-Pin Base

GE

Item #	Order Code	MFG#	ANSI	Volts	Watts	Beam Angle	Beam Spread	Volts	M.O.L.	Life (Hrs)	Pk. Qty.
21368	**Q20MR16/C/NSP15/ESX**	20815	ESX	12	20	15	N. Spot	12	1.88″	5,000	**10**
21370	**Q20MR16/C/FL40/BAB**	20814	BAB	12	20	40	Flood	12	1.88″	5,000	**10**
21372	**Q35MR16/C/SP20/FRA**	20826	FRA	12	35	20	Spot	12	1.88″	5,000	**10**
21374	**Q35MR16/C/FL40/FMW**	20825	FMW	12	35	40	Flood	12	1.88″	5,000	**10**
21376	**Q50MR16/C/NSP15/EXT**	20839	EXT	12	50	15	N. Spot	12	1.88″	6,000	**10**
21378	**Q50MR16/C/NFL25/EXZ**	20835	EXZ	12	50	25	N. Flood	12	1.88″	6,000	**10**
21380	**Q50MR16/C/FL40/EXN**	20833	EXN	12	50	40	Flood	12	1.88″	6,000	**10**
21382	**Q71MR16/C/NSP15/EYF**	20843	EYF	12	71	15	N. Spot	12	1.88″	4,000	**10**
21384	**Q71MR16/C/FL40/EYC**	20840	EYC	12	71	40	Flood	12	1.88″	4,000	**10**

MR16 GX5.3

MR16 Open • GU5.3 / Bi-Pin Base

OSRAM

Item #	Order Code	MFG#	ANSI	Volts	Watts	Beam Angle	Beam Spread	Volts	M.O.L.	Life (Hrs)	Pk. Qty.
21417	**20 MR16/NSP10/ESX**	012612	ESX	12	20	10	Spot	12	1.81"	2,000	**20**
21419	**20MR16/WFL36/BAB**	012629	BAB	12	20	36	W. Flood	12	1.81"	2,000	**20**
21421	**35MR16/NSP10/FRB**	026527	FRB	12	35	10	Spot	12	1.81"	2,000	**20**
21423	**35MR16/WFL36/FMW**	026541	FMW	12	35	36	W. Flood	12	1.81"	2,000	**20**
21425	**50MR16/SP10/EXT**	012636	EXT	12	50	10	Spot	12	1.81"	2,000	**20**
21427	**50MR16/FL24/EXZ**	012551	EXZ	12	50	24	N. Flood	12	1.81"	2,000	**20**
21429	**50MR16/WFL36/EXN**	012575	EXN	12	50	36	W. Flood	12	1.81"	2,000	**20**
21431	**50MR16/VWFL60/FNV**	020112	FNV	12	50	60	Very W. Flood	12	1.81"	2,000	**20**

MR16 GU5.3

HALOGEN LAMPS MR16 - 12 VOLT REFLECTORS

MR16 Open • GU5.3 / Bi-Pin Base — GENERIC

Item #	Order Code	ANSI	Volts	Watts	Beam Angle	Beam Spread	M.O.L.	Life (Hrs)	Pk. Qty.
21442	**20MR16/SP/ESX**	ESX	12	20	12	Spot	1.78"	2,000	**10**
21444	**20MR16/FL/BAB**	BAB	12	20	36	Flood	1.78"	2,000	**10**
21446	**35MR16/SP/FMT**	FMT	12	35	12	Spot	1.78"	2,000	**10**
21447	**35MR16/NFL/FMV**	FMV	12	35	24	N. Flood	1.78"	2,000	**10**
21448	**35MR16/FL/FMW**	FMW	12	35	36	Flood	1.78"	2,000	**10**
21450	**50MR16/SP/EXT**	EXT	12	50	12	Spot	1.78"	2,000	**10**
21452	**50MR16/NFL/EXZ**	EXZ	12	50	24	N. Flood	1.78"	2,000	**10**
21454	**50MR16/FL/EXN**	EXN	12	50	36	Flood	1.78"	2,000	**10**
21458	**75MR16/SP/EYF**	EYF	12	75	12	Spot	1.78"	2,000	**10**
21460	**75MR16/FL/EYC**	EYC	12	75	36	Flood	1.78"	2,000	**10**

MR16 GU5.3

MR16 Constant Color Covered Glass • GU5.3 / Bi-Pin Base — GE

Item #	Order Code	MFG#	ANSI	Volts	Watts	Beam Angle	Beam Spread	M.O.L.	Life (Hrs)	Pk. Qty.
21527	**Q20MR16C/CG15/ESX**	20858	ESX	12	20	15	Spot	1.88"	5,000	**10**
21529	**Q20MR16C/CG40/BAB**	20857	BAB	12	20	40	Flood	1.88"	5,000	**10**
21531	**Q35MR16C/CG20/FRA**	20860	FRA	12	35	20	N. Flood	1.88"	5,000	**10**
21533	**Q35MR16C/CG40/FMW**	20859	FMW	12	35	40	Flood	1.88"	5,000	**10**
21535	**Q50MR16C/CG15/EXT**	20872	EXT	12	50	15	Spot	1.88"	6,000	**10**
21537	**Q50MR16C/CG25/EXZ**	20871	EXZ	12	50	25	N. Flood	1.88"	6,000	**10**
21539	**Q50MR16C/CG40/EXN**	20867	EXN	12	50	40	Flood	1.88"	6,000	**10**
21541	**Q50MR16C/CG55/FNV**	20865	FNV	12	50	55	W. Flood	1.88"	6,000	**10**
21543	**Q71MR16C/CG15/EYF**	20876	EYF	12	71	15	Spot	1.88"	4,000	**10**
21545	**Q71MR16C/CG40/EYC**	20873	EYC	12	71	40	Flood	1.88"	4,000	**10**

MR16 GU5.3

MR16 Covered Glass • GU5.3 / Bi-Pin Base — Sylvania

Item #	Order Code	MFG#	ANSI	Volts	Watts	Beam Angle	Beam Spread	M.O.L.	Life (Hrs)	Pk. Qty.
21552	**20MR16/SP10/C(ESX)**	54305	ESX	12	20	10	Spot	1.75"	2,000	**20**
21554	**20MR16/FL35/C(BAB)**	54306	BAB	12	20	35	Flood	1.75"	2,000	**20**
21556	**35MR16/SP10/C(FRB)**	54307	FRB	12	35	10	Spot	1.75"	2,000	**20**
21558	**35MR16/FL35/C(FMW)**	58324	FMW	12	35	35	Flood	1.75"	2,000	**20**
21560	**50MR16/SP10/C(EXT)**	58325	EXT	12	50	10	Spot	1.75"	2,000	**20**
21562	**50MR16/NFL25/C(EXZ)**	58326	EXZ	12	50	25	N. Flood	1.75"	2,000	**20**
21564	**50MR16/FL35/C(EXN)**	58327	EXN	12	50	35	Flood	1.75"	2,000	**20**
21566	**50MR16/WFL60/C(FNV)**	58328	FNV	12	50	60	W. Flood	1.75"	2,000	**20**

MR16 GU5.3

HALOGEN LAMPS MR16 - 12 / 120 VOLT REFLECTORS

MR16 Covered Glass - 12 Volt • GU5.3 / Bi-Pin Base GENERIC

Item #	Order Code	ANSI	Volts	Watts	Beam Angle	Beam Spread	M.O.L.	Life (Hrs)	Pk. Qty.
21576	**20MR16/SP/CG/ESX**	ESX	12	20	12	Spot	1.78"	2,000	**10**
21578	**20MR16/FL/CG/BAB**	BAB	12	20	36	Flood	1.78"	2,000	**10**
21580	**35MR16/SP/CG/FMT**	FMT	12	35	12	Spot	1.78"	2,000	**10**
21582	**35MR16/NFL/CG/FMV**	FMV	12	35	24	N. Flood	1.78"	2,000	**10**
21584	**35MR16/FL/CG/FMW**	FMW	12	35	36	Flood	1.78"	2,000	**10**
21586	**50MR16/SP/CG/EXT**	EXT	12	50	12	Spot	1.78"	2,000	**10**
21588	**50MR16/NFL/CG/EXZ**	EXZ	12	50	24	N. Flood	1.78"	2,000	**10**
21590	**50MR16/FL/CG/EXN**	EXN	12	50	36	Flood	1.78"	2,000	**10**
21592	**75MR16/SP/CG/EYF**	EYF	12	75	12	Spot	1.78"	2,000	**10**
21594	**75MR16/FL/CG/EYC**	EYC	12	75	36	Flood	1.78"	2,000	**10**

MR16 GU5.3

MR16 - 120 Volt • GX5.3 / GU10 Bi-Pin Base GENERIC

Item #	Order Code	ANSI	Volts	Watts	Beam Angle	Beam Spread	Base	M.O.L.	Life (Hrs)	Pk. Qty.
21776	**35MR/FL38/GX5.3/FMW**	FMW	120	35	38	Flood	GX5.3	1.78"	2,000	**10**
21780	**50MR/FL38/GX5.3/EXN**	EXN	120	50	38	Flood	GX5.3	1.78"	2,000	**10**
21784	**20MR16/FL/GU10/BAB**	BAB	120	20	30	Flood	GU10	2.10"	2,000	**10**
21787	**35MR16/NFL/GU10/FMV**	FMV	120	35	25	N. Flood	GU10	2.10"	2,000	**10**
21788	**35MR16/FL/GU10/FMW**	FMW	120	35	50	Flood	GU10	2.10"	2,000	**10**
21791	**50MR16/NFL/GU10/EXZ**	EXZ	120	50	25	N. Flood	GU10	2.10"	2,000	**10**
21792	**50MR16/FL/GU10/EXN**	EXN	120	50	50	Flood	GU10	2.10"	2,000	**10**

MR16 GX5.3

MR16 GU10

HALOGEN LAMPS RELECTORS / PAR LAMPS

ALR12 Reflector 20 Watt • BA15d / Double Contact Base

GENERIC

Item #	Order Code	Brand	MFG#	Watts	Finish	Volts	Base	M.O.L.	Life (Hrs)	Pk. Qty.
22211	**20ALR12/FL32/GBF**	Philips	34003-4	20	Frosted	12	BA15d	1.5"	2,000	**50**
22256	**GBF**	Generic	-	20	Frosted	12	DC Bay	1.38"	2,000	**10**
22260	**GBF/TC**	Generic	-	20	Silicone Coated	12	DC Bay	1.5"	2,000	**50**

ALR12

PAR 16 60/75 Watt • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts @120V	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (Hrs) @120V	Pk. Qty.
22751	**60PAR16/CAP/NSP10**	59032	60	10	N. Spot	120	650	2.88"	2,000	**15**
22752	**60PAR16/CAP/NSP10/1**	59040	53	10	N. Spot	130	495	2.88"	4,000	**15**
22755	**60PAR16/CAP/NFL30**	59030	60	30	N. Flood	120	650	2.88"	2,000	**15**
22757	**60PAR16/CAP/NFL30/1**	59038	53	30	N. Flood	130	495	2.88"	4,000	**15**
22760	**75PAR16/CAP/NSP10**	59036	75	10	N. Spot	120	900	2.88"	2,000	**15**
22762	**75PAR16/CAP/NSP10/1**	59044	66	10	N. Spot	130	685	2.88"	4,000	**15**
22763	**75PAR16/CAP/NFL30**	59034	75	30	N. Flood	120	900	2.88"	2,000	**15**
22764	**75PAR16/CAP/NFL30/1**	59042	66	30	N. Flood	130	685	2.88"	4,000	**15**

PAR 16

PAR 20 35/50 Watt • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts @120V	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (Hrs) @120V	Pk. Qty.
22911	**35PAR20/CAP/NSP10**	14467	35	10	N. Spot	120	360	3.25"	2,500	**15**
22912	**35PAR20/CAP/NSP10/1**	14460	31	10	N. Spot	130	275	3.25"	5,000	**15**
22915	**35PAR20/CAP/NFL30**	14464	35	30	N. Flood	120	360	3.25"	2,500	**15**
22916	**35PAR20/CAP/NFL30/1**	14459	31	30	N. Flood	130	275	3.25"	5,000	**15**
22917	**35PAR20/CAP/WFL40**	14506	35	40	W. Flood	120	360	3.25"	2,500	**15**
22918	**35PAR20/CAP/WFL40/1**	14461	31	40	W. Flood	130	275	3.25"	5,000	**15**
22921	**50PAR20/CAP/NSP10**	14500	50	10	N. Spot	120	550	3.25"	2,500	**15**
22922	**50PAR20/CAP/NSP10/1**	14528	44	10	N. Spot	130	420	3.25"	5,000	**15**
22925	**50PAR20/CAP/NFL30**	14502	50	30	N. Flood	120	550	3.25"	2,500	**15**
22926	**50PAR20/CAP/NFL30/1**	14529	44	30	N. Flood	130	420	3.25"	5,000	**15**
22927	**50PAR20/CAP/WFL40**	14700	50	40	W. Flood	120	550	3.25"	2,500	**15**

PAR 20

130V Halogens produce less light but last longer when operated @ 120V

PAR 20 50 Watt • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (Hrs)	Pk. Qty.
22945	**50PAR20/H/NFL30/1**	50	20	N. Flood	130	100	3.25"	2,500	**15**

HALOGEN LAMPS PAR LAMPS

PAR 30 Short Neck 50/75 Watt • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts @120V	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (Hrs) @120V	Pk. Qty.
23081	**50PAR30/CAP/NSP9**	14526	50	9	N. Spot	120	660	3.63"	2,500	**15**
23082	**50PAR30/CAP/NSP9/1**	14530	44	9	N. Spot	130	500	3.63"	5,000	**15**
23085	**50PAR30/CAP/NFL25**	14527	50	25	N. Flood	120	660	3.63"	2,500	**15**
23086	**50PAR30/CAP/NFL25/1**	14531	44	25	N. Flood	130	500	3.63"	5,000	**15**
23089	**50PAR30/CAP/FL40**	14710	50	40	Flood	120	660	3.63"	2,500	**15**
23090	**50PAR30/CAP/FL40/1**	14533	44	40	Flood	130	500	3.63"	5,000	**15**
23092	**75PAR30/CAP/NSP9**	14604	75	9	N. Spot	120	1,130	3.63"	2,500	**15**
23093	**75PAR30/CAP/NSP9/1**	14628	66	9	N. Spot	130	860	3.63"	5,000	**15**
23095	**75PAR30/CAP/NFL25**	14603	75	25	N. Flood	120	1,130	3.63"	2,500	**15**
23096	**75PAR30/CAP/NFL25/1**	14627	66	25	N. Flood	130	860	3.63"	5,000	**15**
23099	**75PAR30/CAP/FL40**	14606	75	40	Flood	120	1,130	3.63"	2,500	**15**
23100	**75PAR30/CAP/FL40/1**	14629	66	40	Flood	130	860	3.63"	5,000	**15**

PAR30 lamps are available in two different lengths

PAR30

130V Halogens produce less light but last longer when operated @ 120V

PAR 30 Long Neck 50/75 Watt • E26 / Medium Base

Philips

Item #	Order Code	Brand	MFG#	Watts @120V	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (hrs) @120V	Pk. Qty.
23206	**50PAR30L/H/SP10**	Philips	22922-9	50	10	Spot	120	590	4.5"	3,000	**15**
23207	**50PAR30L/H/SP10/1**	Philips	13847-9	44	DISCONTINUED						
23208	**50PAR30L/H/WSP16**	Philips	22923-7	50	16	W. Spot	120	590	4.5"	3,000	**15**
23210	**50PAR30L/H/FL25**	Philips	22925-2	50	25	Flood	120	590	4.5"	3,000	**15**
23211	**50PAR30L/H/FL25/1**	Philips	22926-0	44	25	Flood	130	470	4.5"	4,000	**15**
23212	**50PAR30L/H/WFL40**	Philips	22927-8	50	40	W. Flood	120	590	4.5"	3,000	**15**
23213	**50PAR30L/H/WFL40/1**	Philips	22928-6	44	40	W. Flood	130	470	4.5"	4,000	**15**
23221	**75PAR30L/H/SP10**	Philips	22930-2	75	10	Spot	120	1,000	4.5"	3,000	**15**
23222	**75PAR30L/H/SP10/1**	Philips	13848-7	66	10	Spot	130	780	4.5"	5,000	**15**
23223	**75PAR30L/H/WSP16**	Philips	22934-4	75	16	W. Spot	120	1,000	4.5"	3,000	**15**
23225	**75PAR30L/H/FL25**	Philips	22941-9	75	25	Flood	120	1,000	4.5"	3,000	**15**
23226	**75PAR30L/H/FL25/1**	Philips	22943-5	66	25	Flood	130	780	4.5"	5,000	**15**
23227	**75PAR30L/H/WFL40**	Philips	22944-3	75	40	W. Flood	120	1,000	4.5"	3,000	**15**
23228	**75PAR30L/H/WFL40/1**	Philips	22945-0	66	40	W. Flood	130	780	4.5"	5,000	**15**

PAR30 Long Neck
Philips

130V Halogens produce less light but last longer when operated @ 120V

HALOGEN LAMPS PAR LAMPS

PAR 30 Long Neck 50 / 75 Watt • E26 / Medium Base

Sylvania

Item #	Order Code	Brand	MFG#	Watts @120V	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (Hrs) @120V	Pk. Qty.
23286	**50PAR30L/CAP/NSP9**	Sylvania	14509	50	9	N. Spot	120	660	4.63"	2,500	**15**
23287	**50PAR30L/CAP/NSP9/1**	Sylvania	14482	44	9	N. Spot	130	500	4.63"	5,000	**15**
23288	**50PAR30L/CAP/FL25**	Sylvania	14520	50	25	Flood	120	660	4.63"	2,500	**15**
23289	**50PAR30L/CAP/FL25/1**	Sylvania	14478	44	25	Flood	130	500	4.63"	5,000	**15**
23294	**50PAR30L/CAP/FL50**	Sylvania	14537	50	50	W. Flood	120	660	4.63"	2,500	**15**
23295	**50PAR30L/CAP/FL50/1**	Sylvania	14486	44	50	W. Flood	130	500	4.63"	5,000	**15**
23331	**75PAR30L/CAP/NSP9**	Sylvania	14786	75	9	N. Spot	120	1,130	4.63"	2,500	**15**
23332	**75PAR30L/CAP/NSP9/1**	Sylvania	14777	66	9	N. Spot	130	860	4.63"	5,000	**15**
23333	**75PAR30L/CAP/FL25**	Sylvania	14769	75	25	Flood	120	1,130	4.63"	2,500	**15**
23334	**75PAR30L/CAP/FL25/1**	Sylvania	14778	66	25	Flood	130	860	4.63"	5,000	**15**
23339	**75PAR30L/CAP/FL50**	Sylvania	14768	75	50	W. Flood	120	1,130	4.63"	2,500	**15**
23340	**75PAR30L/CAP/FL50/1**	Sylvania	14785	66	50	W. Flood	130	860	4.63"	5,000	**15**

130V Halogens produce less light but last longer when operated @ 120V

PAR30 Long Neck Sylvania

PAR 36 36 / 50 Watt • Screw Terminal Base

Sylvania

Item #	Order Code	MFG#	Watts	Beam Angle	Beam Spread	Volts	Lumens	M.O.L.	Life (Hrs)	Pk. Qty.
23481	**36PAR36/CAP/VNSP5**	55100	36	5	Very N.Spot	12	500	2.75"	4,000	**12**
23482	**36PAR36/CAP/NSP13**	55090	36	13	N. Spot	12	500	2.75"	4,000	**12**
23483	**36PAR36/CAP/WFL32**	55091	36	32	W. Flood	12	500	2.75"	4,000	**12**
23486	**50PAR36/CAP/NSP6**	55118	50	6	N. Spot	12	700	2.75"	4,000	**12**
23487	**50PAR36/CAP/WFL30**	55017	50	30	W. Flood	12	700	2.75"	4,000	**12**



PAR36 Screw Terminal

HALOGEN LAMPS PAR LAMPS

PAR 38 45 - 60 - 75 - 90 Watt • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts @120V	Beam Angle	Beam Spread	Volts	Lumens @120V	M.O.L.	Life (Hrs) @120V	Pk. Qty.
23626	**45PAR/CAP/NSP9**	14590	45	9	N. Spot	120	560	5.31"	2,500	**15**
23627	**45PAR/CAP/NSP9/1**	14593	40	9	N. Spot	130	425	5.31"	5,000	**15**
23628	**45PAR/CAP/WSP12**	14589	45	12	W. Spot	120	560	5.31"	2,500	**15**
23629	**45PAR/CAP/WSP12/1**	14592	40	12	W. Spot	130	425	5.31"	5,000	**15**
23632	**45PAR/CAP/FL30**	14588	45	30	Flood	120	560	5.31"	2,500	**15**
23633	**45PAR/CAP/FL30/1**	14591	40	30	Flood	130	425	5.31"	5,000	**15**
23637	**45PAR/CAP/WFL50/1**	14010	40	50	W. Flood	130	425	5.31"	5,000	**15**
23786	**60PAR/CAP/NSP9**	14469	60	9	N. Spot	120	850	5.31"	3,000	**15**
23787	**60PAR/CAP/NSP9/1**	14449	53	9	N. Spot	130	645	5.31"	6,000	**15**
23788	**60PAR/CAP/WSP12**	14423	60	12	W. Spot	120	DISCONTINUED			
23790	**60PAR/CAP/NFL25**	14472	66	25	N. Flood	120	850	5.31"	3,000	**15**
23792	**60PAR/CAP/FL30**	14468	60	30	Flood	120	850	5.31"	3,000	**15**
23793	**60PAR/CAP/FL30/1**	14448	53	30	Flood	130	645	5.31"	6,000	**15**
23946	**75PAR/CAP/NSP9**	14514	75	9	N. Spot	120	1,060	5.31"	2,500	**15**
23947	**75PAR/CAP/NSP9/1**	14516	66	9	N. Spot	130	805	5.31"	5,000	**15**
23948	**75PAR/CAP/WSP12**	14510	75	12	W. Spot	120	1,060	5.31"	2,500	**15**
23952	**75PAR/CAP/FL30**	14513	75	30	Flood	120	1,060	5.31"	2,500	**15**
23953	**75PAR/CAP/FL30/1**	14515	66	30	Flood	130	805	5.31"	5,000	**15**
23955	**75PAR/CAP/WFL50/1**	14517	66	50	W. Flood	130	805	5.31"	5,000	**15**
24106	**90PAR/CAP/NSP9**	14586	90	9	N. Spot	120	1,310	5.31"	2,500	**15**
24107	**90PAR/CAP/NSP9/1**	14587	79	9	N. Spot	130	1,000	5.31"	5,000	**15**
24108	**90PAR/CAP/WSP12**	14580	90	12	W. Spot	120	1,310	5.31"	2,500	**15**
24109	**90PAR/CAP/WSP12/1**	14578	79	12	W. Spot	130	1,000	5.31"	5,000	**15**
24111	**90PAR/CAP/NFL25/1**	14601	79	25	N. Flood	130	1,000	5.31"	5,000	**15**
24112	**90PAR/CAP/FL30**	14579	90	30	Flood	120	1,310	5.31"	2,500	**15**
24113	**90PAR/CAP/FL30/1**	14577	79	30	Flood	130	1,000	5.31"	5,000	**15**
24115	**90PAR/CAP/WFL50/1**	14602	79	50	W. Flood	130	1,000	5.31"	5,000	**15**

PAR38

130V Halogens produce less light but last longer when operated @ 120V

PAR 38 75/90 Watt • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Beam Angle	Beam Spread	Volts	Lumens	M.O.L.	Life (Hrs) @120V	Pk. Qty.
23980	**75PAR/H/FL30/1**	75	Flood	30	130	1,130	5.31"	2,500	**15**
24140	**90PAR/H/FL30/1**	90	Flood	30	130	1,300	5.31"	2,500	**15**

PAR38

HALOGEN LAMPS PAR LAMPS - DOUBLE ENDED

PAR 38 100 - 120 - 250 Watt • E26 / Medium Base

GE Sylvania

Item #	Order Code	Brand	MFG#	Watts @120V	Volts	Beam Angle	Beam Spread	Lumens @120V	Life (Hrs) @120V	Pk. Qty.
24231	**100PAR/H/FL25/130V**	GE	17947	88	130	25	Flood	1,150	4,000	**12**
24246	**120PAR/CAP/SP10**	Sylvania	14856	120	120	10	Spot	1,800	3,000	**15**
24247	**120PAR/CAP/SP10/1**	Sylvania	14874	105	130	10	Spot	1,370	6,000	**15**
24248	**120PAR/CAP/NFL25**	Sylvania	14848	DISCONTINUED						
24250	**120PAR/CAP/FL30**	Sylvania	14855	120	120	30	Flood	1,800	3,000	**15**
24251	**120PAR/CAP/FL30/1**	Sylvania	14861	105	130	30	Flood	1,370	6,000	**15**
24252	**120PAR/CAP/WFL50**	Sylvania	14594	120	120	50	W. Flood	1,800	3,000	**15**
24261	**250PAR/CAP/SP10**	Sylvania	15526	250	120	10	Spot	3,600	4,500	**6**
24265	**250PAR/CAP/FL30**	Sylvania	15558	250	120	30	Flood	3,600	4,500	**6**

PAR 38

130V Halogens produce less light but last longer when operated @ 120V

DE Quartz • R7S Base

GENERIC

Item #	Order Code	Watts	Volts	Bulb	Base	Lumens	M.O.L.	Dia.	Life (Hrs)	Pk. Qty.
24640	**Q75T3/CL/S/130V**	75	130	T3	R7S	1,200	3.07"/ 78mm	0.38"	2,000	**10**
24641	**Q100T3/CL/S/130V**	100	130	T3	R7S	1,400	3.07"/ 78mm	0.38"	2,000	**10**
24642	**Q150T3/CL/S/130V**	150	130	T3	R7S	2,400	3.07" / 78mm	0.38"	2,000	**10**
24643	**Q200T3/CL/S/130V**	200	130	T3	R7S	3,200	3.07" / 78mm	0.38"	2,000	**10**
24644	**Q250T3/CL/S/130V**	250	130	T3	R7S	4,000	3.07" / 78mm	0.38"	2,000	**10**
24751	**Q100T3/CL/130V**	100	130	T3	R7S	1,400	4.65″/ 118mm	0.38"	2,000	**10**
24752	**Q150T3/CL/130V**	150	130	T3	R7S	2,400	4.65″/ 118mm	0.38"	2,000	**10**
24753	**Q200T3/CL/130V**	200	130	T3	R7S	3,200	4.65″/ 118mm	0.38"	2,000	**10**
24755	**Q300T3/CL/130V**	300	130	T3	R7S	5,000	4.65″/ 118mm	0.38"	2,000	**10**
24756	**Q500T3/CL/130V**	500	130	T3	R7S	9,500	4.65″/ 118mm	0.38"	2,000	**10**
24863	**Q1000T3/CL/S/130V**	1,000	130	T3	R7S	21,000	7.44" / 189mm	0.38"	2,000	**10**
24973	**Q1000T3/CL/130V**	1,000	130	T3	R7S	21,000	10" / 254mm	0.38"	2,000	**10**
24974	**Q1000T3/CL/240V**	1,000	240	T3	R7S	21,000	10" / 254mm	0.38"	2,000	**10**
24975	**Q1500T3/CL/130V**	1,500	130	T3	R7S	33,000	10" / 254mm	0.38"	2,000	**10**
24976	**Q1500T3/CL/240V**	1,500	240	T3	R7S	33,000	10" / 254mm	0.38"	2,000	**10**
24977	**Q1500T3/CL/277V**	1,500	277	T3	R7S	33,000	10" / 254mm	0.38"	2,000	**10**

COMPACT FLUORESCENT LAMPS PLUG-IN

CONTENTS

Long Twin Tubes 4-Pin 38
Germicidal Twin Tubes 4-Pin 39
Quad Tubes 2-Pin 39
Quad Tubes 4-Pin 41
Triple Tubes 4-Pin 43

PROS

- Energy Efficient
- Several Color Options
- Long life
- Good Lumens Maint.

CONS

- Higher Initial cost over Incandescent
- Temperature Sensitive

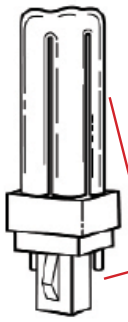

How Light is Produced

Fluorescent light in CFL's is produced by electrons emitted from the electrode that collide with mercury atoms. The impact produces ultraviolet rays and the phosphors on the inside of the glass tube convert this to visible light.

Built-in Electronic Ballast Compacts (starting p. 45)

T4 Twin Tube Compacts 2-Pin • G23 & GX23 Base

Sylvania

Item #	Order Code	MFG#	Watts	Base	Bulb	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
25091	**CF5DS/827/ECO**	20325	5	G23 - 2 Pin	T4	230/198	2700K	Warm White	82	4.2"	10,000	**50**
25094	**CF5DS/841/ECO**	20303	5	G23 - 2 Pin	T4	230/198	4100K	Cool White	82	4.2"	10,000	**50**
25097	**CF7DS/827/ECO**	20327	7	G23 - 2 Pin	T4	400/344	2700K	Warm White	82	5.3"	10,000	**50**
25099	**CF7DS/835/ECO**	20310	7	G23 - 2 Pin	T4	400/344	3500K	Soft White	82	5.3"	10,000	**50**
25100	**CF7DS/841/ECO**	20304	7	G23 - 2 Pin	T4	400/344	4100K	Cool White	82	5.3"	10,000	**50**
25101	**CF7DS/850/ECO**	20307	7	G23 - 2 Pin	T4	400/344	5000K	Nat. White	82	5.3"	10,000	**50**
25103	**CF9DS/827/ECO**	20329	9	G23 - 2 Pin	T4	580/499	2700K	Warm White	82	6.5"	10,000	**50**
25105	**CF9DS/835/ECO**	20333	9	G23 - 2 Pin	T4	580/499	3500K	Soft White	82	6.5"	10,000	**50**
25106	**CF9DS/841/ECO**	20305	9	G23 - 2 Pin	T4	580/499	4100K	Cool White	82	6.5"	10,000	**50**
25107	**CF9DS/850/ECO**	20308	9	G23 - 2 Pin	T4	580/499	5000K	Nat. White	82	6.5"	10,000	**50**
25109	**CF13DS/827/ECO**	20331	13	GX23 - 2 Pin	T4	800/688	2700K	Warm White	82	7.1"	10,000	**50**
25110	**CF13DS/830/ECO**	20283	13	GX23 - 2 Pin	T4	800/688	3000K	Warm White	82	7.1"	10,000	**50**
25111	**CF13DS/835/ECO**	20335	13	GX23 - 2 Pin	T4	800/688	3500K	Soft White	82	7.1"	10,000	**50**
25112	**CF13DS/841/ECO**	20306	13	GX23 - 2 Pin	T4	800/688	4100K	Cool White	82	7.1"	10,000	**50**
25113	**CF13DS/850/ECO**	20309	13	GX23 - 2 Pin	T4	800/688	5000K	Nat. White	82	7.1"	10,000	**50**

Sylvania
T4 Twin Tube 2-Pin
G23/GX23 Base

COMPACT FLUORESCENT LAMPS PLUG-IN

T4 Twin Tube Compacts 2-Pin • G23 & GX23 Base

GENERIC

Item #	Order Code	Watts	Base	Bulb	Lumens Initial	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
25115	**CF5DS/827**	5	G23 - 2 Pin	T4	250	2700K	Warm White	82	4.25"	10,000	**50**
25118	**CF5DS/841**	5	G23 - 2 Pin	T4	250	4100K	Cool White	82	4.25"	10,000	**50**
25122	**CF7DS/827**	7	G23 - 2 Pin	T4	400	2700K	Warm White	82	5.43"	10,000	**50**
25124	**CF7DS/835**	7	G23 - 2 Pin	T4	400	3500K	Soft White	82	5.43"	10,000	**50**
25125	**CF7DS/841**	7	G23 - 2 Pin	T4	400	4100K	Cool White	82	5.43"	10,000	**50**
25126	**CF7DS/850**	7	G23 - 2 Pin	T4	400	5000K	Nat. White	82	5.43"	10,000	**50**
25130	**CF9DS/827**	9	G23 - 2 Pin	T4	600	2700K	Warm White	82	6.6"	10,000	**50**
25132	**CF9DS/835**	9	G23 - 2 Pin	T4	600	3500K	Soft White	82	6.6"	10,000	**50**
25133	**CF9DS/841**	9	G23 - 2 Pin	T4	600	4100K	Cool White	82	6.6"	10,000	**50**
25134	**CF9DS/850**	9	G23 - 2 Pin	T4	600	5000K	Nat. White	82	6.6"	10,000	**50**
25137	**CF13DS/827**	13	GX23 - 2 Pin	T4	825	2700K	Warm White	82	7.2"	10,000	**50**
25139	**CF13DS/835**	13	GX23 - 2 Pin	T4	825	3500K	Soft White	82	7.2"	10,000	**50**
25140	**CF13DS/841**	13	GX23 - 2 Pin	T4	825	4100K	Cool White	82	7.2"	10,000	**50**
25141	**CF13DS/850**	13	GX23 - 2 Pin	T4	825	5000K	Nat. White	82	7.2"	10,000	**50**
25142	**CF13DS/865**	13	GX23 - 2 Pin	T4	825	6500K	Daylight	82	7.2"	10,000	**50**

Generic
T4 Twin Tube 2-Pin
G23/GX23 Base

COMPACT FLUORESCENT LAMPS PLUG-IN

T5 Long Twin Tubes 4-Pin • 2G11 Base

Philips

Item #	Order Code	MFG#	Watts	Bulb	Lumens Initial/Mean	Color Temp.	Finish	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
25202	**PL-L18W/830/4P**	34500-9	18	T5	1,250/1,125	3000K	Warm White	82	8.94"	15,000	**25**
25203	**PL-L18W/835/4P**	35932-3	18	T5	1,250/1,125	3500K	Soft White	82	8.94"	15,000	**25**
25204	**PL-L18W/841/4P**	34501-7	18	T5	1,250/1,125	4100K	Cool White	82	8.94"	15,000	**25**
25208	**PL-L24W/830/4P**	34505-8	24	T5	1,800/1,620	3000K	Warm White	82	12.69"	15,000	**25**
25209	**PL-L24W/835/4P**	35933-1	24	T5	1,800/1,620	3500K	Soft White	82	12.69"	15,000	**25**
25210	**PL-L24W/841/4P**	34508-2	24	T5	1,800/1,620	4100K	Cool White	82	12.69"	15,000	**25**
25214	**PL-L36W/830/4P**	34511-6	36	T5	2,900/2,610	3000K	Warm White	82	16.44"	15,000	**25**
25215	**PL-L36W/835/4P**	34942-3	36	T5	2,900/2,610	3500K	Soft White	82	16.44"	15,000	**25**
25216	**PL-L36W/841/4P**	34513-2	36	T5	2,900/2,610	4100K	Cool White	82	16.44"	15,000	**25**
25220	**PL-L40W/830/4P/RS/IS**	30042-6	40	T5	3,300/2,970	3000K	Warm White	82	22.5"	20,000	**25**
25221	**PL-L40W/835/4P/RS/IS**	30043-4	40	T5	3,300/2,970	3500K	Soft White	82	22.5"	20,000	**25**
25222	**PL-L40W/841/4P/RS/IS**	30044-2	40	T5	3,300/2,970	4100K	Cool White	82	22.5"	20,000	**25**
25226	**PL-L50/830/4P/RS**	34747-6	50	T5	4,300/3,870	3000K	Warm White	82	22.5"	20,000	**25**
25227	**PL-L50/835/4P/RS**	34753-4	50	T5	4,300/3,870	3500K	Soft White	82	22.5"	20,000	**25**
25228	**PL-L50/841/4P/RS**	34770-8	50	T5	4,300/3,870	4100K	Cool White	82	22.5"	20,000	**25**

Philips T5 Twin Tube 4-Pin 2G11 Base

T4 Twin Tube 4-Pin • 2GX7 Base

Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts	Bulb	Lumens Initial/Mean	Color Temp.	Finish	CRI	M.O.L.	Life (hrs)	Pk. Qty.
25265	**CF13DS/E/827**	Sylvania	20314	13	T4	800/688	2700K	Warm White	82	6.2"	10,000	**50**
25266	**CF13DS/E/830**	Sylvania	20284	13	T4	800/688	3000K	Warm White	82	6.2"	10,000	**50**
25268	**CF13DS/E/841**	Sylvania	20318	13	T4	800/688	4100K	Cool White	82	6.2"	10,000	**50**
25290	**CF13DS/E/827**	Generic	-	13	T4	825/*	2700K	Warm White	82	6.3"	10,000	**50**
25292	**CF13DS/E/835**	Generic	-	13	T4	825/*	3500K	Soft White	82	6.3"	10,000	**50**
25294	**CF13DS/E/841**	Generic	-	13	T4	825/*	4100K	Cool White	82	6.3"	10,000	**50**
25295	**CF13DS/E/850**	Generic	-	13	T4	825/*	5000K	Nat. White	82	6.3"	10,000	**50**

* Ratings Not Available

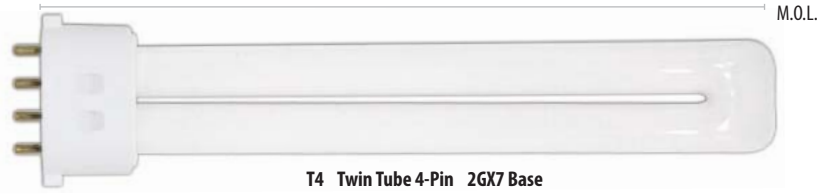

T4 Twin Tube 4-Pin 2GX7 Base

COMPACT FLUORESCENT LAMPS PLUG-IN

PL Twin Tube 4-Pin - Germicidal UV • 2G11 Base

Philips

Item #	Order Code	MFG#	Watts	Base	Bulb	Finish	M.O.L.	Life (Hrs)	Pk. Qty.
25525	**PL-L18W/TUV**	21064-1	18	2G11	PL-L	Clear	8.94"	9,000	**25**
25526	**PL-L36W/TUV**	26585-0	36	2G11	PL-L	Clear	16.44"	9,000	**25**

PL-L Twin Tube 4-Pin

T5 PL Quad Tube 2-Pin 15mm • GX32d-2 / GX32d-3 Base

Philips

Item #	Order Code	MFG#	Watts	Base	Bulb	Lumens Initial/Mean	Color Temp.	Color	M.O.L.	Life (Hrs)	Pk. Qty.
25651	**PL-C15MM/22W/27**	20478-4	20	GX32d-2	PL-C	1,200/995	2700K	Warm White	6"	10,000	**40**
25652	**PL-C15MM/28W/27**	20479-2	27	GX32d-3	PL-C	1,600/1,325	2700K	Warm White	6.81"	10,000	**40**

Additional 15mm Quads on Page 41

PL-C 2-Pin

T4 Quad Tube 2-Pin • GX23d-2 / G24d-3 Base

GE

Item #	Order Code	MFG#	Watts	Bulb	Base	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
25656	**F13DBX23/827/ECO**	97586	13	T4	GX23-2	810/685	2700K	Warm White	82	4.7"	10,000	**10**
25657	**F13DBX23/830/ECO**	97587	13	T4	GX23-2	810/685	3000K	Warm White	82	4.7"	10,000	**10**
25658	**F13DBX23/835/ECO**	97588	13	T4	GX23-2	810/685	3500K	Soft White	82	4.7"	10,000	**10**
25659	**F13DBX23/841/ECO**	97589	13	T4	GX23-2	810/685	4100K	Cool White	82	4.7"	10,000	**10**
25662	**F18DBX/827/ECO**	97577	18	T4	G24d-2	1200/980	2700K	Warm White	82	6.1"	10,000	**10**
25663	**F18DBX/830/ECO**	97578	18	T4	G24d-2	1200/980	3000K	Warm White	82	6.1"	10,000	**10**
25664	**F18DBX/835/ECO**	97579	18	T4	G24d-2	1200/980	3500K	Soft White	82	6.1"	10,000	**10**
25665	**F18DBX/841/ECO**	97580	18	T4	G24d-2	1200/980	4100K	Cool White	82	6.1"	10,000	**10**
25668	**F26DBX/827/ECO**	97606	26	T4	G24d-3	1710/1460	2700K	Warm White	82	6.7″	10,000	**10**
25669	**F26DBX/830/ECO**	97607	26	T4	G24d-3	1710/1460	3000K	Warm White	82	6.7″	10,000	**10**
25670	**F26DBX/835/ECO**	97608	26	T4	G24d-3	1710/1460	3500K	Soft White	82	6.7″	10,000	**10**
25671	**F26DBX/841/ECO**	97609	26	T4	G24d-3	1710/1460	4100K	Cool White	82	6.7″	10,000	**10**

T4 Quad Tube 2 Pin

COMPACT FLUORESCENT LAMPS PLUG-IN

T4 Quad Tube 2-Pin • G23-2, GX23-2, G24d-2, G24d-3 Base

Sylvania

Item #	Order Code	MFG#	Watts	Bulb	Base	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
25681	**CF9DD/827/ECO**	20689	9	T4	G23-2	525/452	2700K	Warm White	82	4.3"	10,000	**50**
25683	**CF9DD/835/ECO**	20690	9	T4	G23-2	525/452	3500K	Soft White	82	4.3"	10,000	**50**
25687	**CF13DD/827/ECO**	20691	13	T4	GX23-2	780/671	2700K	Warm White	82	4.6"	10,000	**50**
25688	**CF13DD/830/ECO**	20705	13	T4	GX23-2	780/671	3000K	Warm White	82	4.6"	10,000	**50**
25689	**CF13DD/835/ECO**	20692	13	T4	GX23-2	780/671	3500K	Soft White	82	4.6"	10,000	**50**
25690	**CF13DD/841/ECO**	20708	13	T4	GX23-2	780/671	4100K	Cool White	82	4.6"	10,000	**50**
25693	**CF18DD/827/ECO**	20676	18	T4	G24d-2	1,150/989	2700K	Warm White	82	6"	10,000	**50**
25694	**CF18DD/830/ECO**	20709	18	T4	G24d-2	1,150/989	3000K	Warm White	82	6"	10,000	**50**
25695	**CF18DD/835/ECO**	20677	18	T4	G24d-2	1,150/989	3500K	Soft White	82	6"	10,000	**50**
25696	**CF18DD/841/ECO**	20678	18	T4	G24d-2	1,150/989	4100K	Cool White	82	6"	10,000	**50**
25699	**CF26DD/827/ECO**	20679	26	T4	G24d-3	1,710/1,470	2700K	Warm White	82	6.8"	10,000	**50**
25700	**CF26DD/830/ECO**	20710	26	T4	G24d-3	1,710/1,470	3000K	Warm White	82	6.8"	10,000	**50**
25701	**CF26DD/835/ECO**	20680	26	T4	G24d-3	1,710/1,470	3500K	Soft White	82	6.8"	10,000	**50**
25702	**CF26DD/841/ECO**	20681	26	T4	G24d-3	1,710/1,470	4100K	Cool White	82	6.8"	10,000	**50**

T4 Quad Tube 2 Pin

T4 Quad Tube 2-Pin • G23-2, GX23-2, G24d-2, G24d-3 Base

GENERIC

Item #	Order Code	Watts	Bulb	Base	Lumens Initial	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
25705	**CF9DD/827**	9	T4	G23-2	525	2700K	Warm White	82	4.3"	10,000	**50**
25706	**CF9DD/841**	9	T4	G23-2	525	4100K	Cool White	82	4.3"	10,000	**50**
25709	**CF13DD/827**	13	T4	GX23-2	900	2700K	Warm White	82	4.7"	10,000	**50**
25711	**CF13DD/835**	13	T4	GX23-2	900	3500K	Soft White	82	4.7"	10,000	**50**
25712	**CF13DD/841**	13	T4	GX23-2	900	4100K	Cool White	82	4.7"	10,000	**50**
25713	**CF13DD/850**	13	T4	GX23-2	900	5000K	Nat. White	82	4.7"	10,000	**50**
25715	**CF18DD/827**	18	T4	G24d-2	1,200	2700K	Warm White	82	6"	10,000	**50**
25716	**CF18DD/835**	18	T4	G24d-2	1,200	3500K	Soft White	82	6"	10,000	**50**
25717	**CF18DD/841**	18	T4	G24d-2	1,200	4100K	Cool White	82	6"	10,000	**50**
25718	**CF18DD/850**	18	T4	G24d-2	1,200	5000K	Nat. White	82	6"	10,000	**50**
25720	**CF26DD/827**	26	T4	G24d-3	1,800	2700K	Warm White	82	6.8"	10,000	**50**
25722	**CF26DD/835**	26	T4	G24d-3	1,800	3500K	Soft White	82	6.8"	10,000	**50**
25723	**CF26DD/841**	26	T4	G24d-3	1,800	4100K	Cool White	82	6.8"	10,000	**50**
25724	**CF26DD/850**	26	T4	G24d-3	1,800	5000K	Nat. White	82	6.8"	10,000	**50**

T4 Quad Tube 2 Pin

COMPACT FLUORESCENT LAMPS PLUG-IN

T5 Quad Tube 2-Pin - 15mm • GX32d-2, GX32d-3 Base

GENERIC

Item #	Order Code	Watts	Base	Lumens	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
25726	**CF22DD/828/15MM**	22	GX32d-2	1200	2800K	Warm White	82	6"	10,000	**50**
25727	**CF22DD/850/15MM**	22	GX32d-2	1200	5000K	Natural White	82	6"	10,000	**50**
25728	**CF28DD/828/15MM**	28	GX32d-3	1800	2800K	Warm White	82	6.8"	10,000	**50**
25729	**CF28DD/850/15MM**	28	GX32d-3	1800	5000K	Natural White	82	6.8"	10,000	**50**

T5 Quad Tube 2 Pin

T4 Quad Tube 4-Pin • G24q-1, G24q-2, G24q-3 Base

GE

Item #	Order Code	MFG#	Watts	Base	Lumens Initial/Mean	Color Temp.	Color	M.O.L.	CRI	Life (Hrs)	Pk. Qty.
25816	**F13DBX/827/ECO/4P**	97594	13	G24q-1	900/755	2700K	Warm White	5.0"	82	12,000	**10**
25817	**F13DBX/830/ECO/4P**	97595	13	G24q-1	900/755	3000K	Warm White	5.0"	82	12,000	**10**
25818	**F13DBX/835/ECO/4P**	97596	13	G24q-1	900/755	3500K	Soft White	5.0"	82	12,000	**10**
25819	**F13DBX/841/ECO/4P**	97597	13	G24q-1	900/755	4100K	Cool White	5.0"	82	12,000	**10**
25822	**F18DBX/827/ECO/4P**	97598	18	G24q-2	1,200/970	2700K	Warm White	5.8"	82	12,000	**10**
25823	**F18DBX/830/ECO/4P**	97599	18	G24q-2	1,200/970	3000K	Warm White	5.8"	82	12,000	**10**
25824	**F18DBX/835/ECO/4P**	97600	18	G24q-2	1,200/970	3500K	Soft White	5.8"	82	12,000	**10**
25825	**F18DBX/841/ECO/4P**	97601	18	G24q-2	1,200/970	4100K	Cool White	5.8"	82	12,000	**10**
25828	**F26DBX/827/ECO/4P**	97610	26	G24q-3	1,710/1,440	2700K	Warm White	6.4"	82	12,000	**10**
25829	**F26DBX/830/ECO/4P**	97611	26	G24q-3	1,710/1,440	3000K	Warm White	6.4"	82	12,000	**10**
25830	**F26DBX/835/ECO/4P**	97612	26	G24q-3	1,710/1,440	3500K	Soft White	6.4"	82	12,000	**10**
25831	**F26DBX/841/ECO/4P**	97613	26	G24q-3	1,710/1,440	4100K	Cool White	6.4"	82	12,000	**10**

T4 Quad Tube 4 Pin

COMPACT FLUORESCENT LAMPS PLUG-IN

T4 Quad Tube 4-Pin • G24q-1, G24q-2, G24q-3 Base

Sylvania

Item #	Order Code	MFG#	Watts	Base	Lumens Initial/Mean	Color Temp.	Color	M.O.L.	CRI	Life (Hrs)	Pk. Qty.
25841	**CF13DD/E/827/ECO**	20682	13	G24q-1	900/774	2700K	Warm White	5.2"	82	12,000	**50**
25842	**CF13DD/E/830/ECO**	20721	13	G24q-1	900/774	3000K	Warm White	5.2"	82	12,000	**50**
25843	**CF13DD/E/835/ECO**	20671	13	G24q-1	900/774	3500K	Soft White	5.2"	82	12,000	**50**
25844	**CF13DD/E/841/ECO**	20667	13	G24q-1	900/774	4100K	Cool White	5.2"	82	12,000	**50**
25847	**CF18DD/E/827/ECO**	20683	18	G24q-2	1,150/989	2700K	Warm White	5.8"	82	12,000	**50**
25848	**CF18DD/E/830/ECO**	20724	18	G24q-2	1,150/989	3000K	Warm White	5.8"	82	12,000	**50**
25849	**CF18DD/E/835/ECO**	20672	18	G24q-2	1,150/989	3500K	Soft White	5.8"	82	12,000	**50**
25850	**CF18DD/E/841/ECO**	20668	18	G24q-2	1,150/989	4100K	Cool White	5.8"	82	12,000	**50**
25853	**CF26DD/E/827/ECO**	20684	26	G24q-3	1,710/1,470	2700K	Warm White	6.5"	82	12,000	**50**
25854	**CF26DD/E/830/ECO**	20722	26	G24q-3	1,710/1,470	3000K	Warm White	6.5"	82	12,000	**50**
25855	**CF26DD/E/835/ECO**	20673	26	G24q-3	1,710/1,470	3500K	Soft White	6.5"	82	12,000	**50**
25856	**CF26DD/E/841/ECO**	20669	26	G24q-3	1,710/1,470	4100K	Cool White	6.5"	82	12,000	**50**

T4 Quad Tube 4 Pin

T4 Quad Tube 4-Pin • G24q-1, G24q-2, G24q-3 Base

GENERIC

Item #	Order Code	MFG#	Watts	Base	Lumens Initial	Color Temp.	Color	M.O.L.	CRI	Life (Hrs)	Pk. Qty.
25866	**CF13DD/E/827**	-	13	G24q-1	900	2700K	Warm White	5.2"	82	10,000	**50**
25867	**CF13DD/E/830**	-	13	G24q-1	900	3000K	Warm White	5.2"	82	10,000	**50**
25868	**CF13DD/E/835**	-	13	G24q-1	900	3500K	Soft White	5.2"	82	10,000	**50**
25869	**CF13DD/E/841**	-	13	G24q-1	900	4100K	Cool White	5.2"	82	10,000	**50**
25870	**CF13DD/E/850**	-	13	G24q-1	900	5000K	Nat. White	5.2"	82	10,000	**50**
25872	**CF18DD/E/827**	-	18	G24q-2	1,200	2700K	Warm White	5.8"	82	10,000	**50**
25874	**CF18DD/E/835**	-	18	G24q-2	1,200	3500K	Soft White	5.8"	82	10,000	**50**
25875	**CF18DD/E/841**	-	18	G24q-2	1,200	4100K	Cool White	5.8"	82	10,000	**50**
25876	**CF18DD/E/850**	-	18	G24q-2	1,200	5000K	Nat. White	5.8"	82	10,000	**50**
25878	**CF26DD/E/827**	-	26	G24q-3	1,800	2700K	Warm White	6.5"	82	10,000	**50**
25880	**CF26DD/E/835**	-	26	G24q-3	1,800	3500K	Soft White	6.5"	82	10,000	**50**
25881	**CF26DD/E/841**	-	26	G24q-3	1,800	4100K	Cool White	6.5"	82	10,000	**50**
25882	**CF26DD/E/850**	-	26	G24q-3	1,800	5000K	Nat. White	6.5"	82	10,000	**50**

T4 Quad Tube 4 Pin

COMPACT FLUORESCENT LAMPS PLUG-IN

T4 Triple Tube 4-Pin • GX24q-1, GX24q-2, GX24q-3, GX24q-4 Base

GE

Item #	Order Code	MFG#	Watts	Base	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L	Life (hrs)	Pk. Qty.
25981	**F13TBX/827/A/ECO**	97619	13	GX24q-1	900/755	2700K	Warm White	82	4.2"	12,000	**10**
25982	**F13TBX/830/A/ECO**	97620	13	GX24q-1	900/755	3000K	Warm White	82	4.2"	12,000	**10**
25983	**F13TBX/835/A/ECO**	97621	13	GX24q-1	900/755	3500K	Soft White	82	4.2"	12,000	**10**
25984	**F13TBX/841/A/ECO**	97622	13	GX24q-1	900/755	4100K	Cool White	82	4.2"	12,000	**10**
25987	**F18TBX/827/A/ECO**	97624	18	GX24q-2	1,200/1,010	2700K	Warm White	82	4.8"	12,000	**10**
25988	**F18TBX/830/A/ECO**	97625	18	GX24q-2	1,200/1,010	3000K	Warm White	82	4.8"	12,000	**10**
25989	**F18TBX/835/A/ECO**	97626	18	GX24q-2	1,200/1,010	3500K	Soft White	82	4.8"	12,000	**10**
25990	**F18TBX/841/A/ECO**	97627	18	GX24q-2	1,200/1,020	4100K	Cool White	82	4.8"	12,000	**10**
25993	**F26TBX/827/A/ECO**	97614	26	GX24q-3	1,710/1,440	2700K	Warm White	82	5.2"	12,000	**10**
25994	**F26TBX/830/A/ECO**	97615	26	GX24q-3	1,710/1,440	3000K	Warm White	82	5.2"	12,000	**10**
25995	**F26TBX/835/A/ECO**	97616	26	GX24q-3	1,710/1,440	3500K	Soft White	82	5.2"	12,000	**10**
25996	**F26TBX/841/A/ECO**	97617	26	GX24q-3	1,710/1,440	4100K	Cool White	82	5.2"	12,000	**10**
25999	**F32TBX/827/A/ECO**	97629	32	GX24q-3	2,200/1,850	2700K	Warm White	82	5.5"	12,000	**10**
26000	**F32TBX/830/A/ECO**	97630	32	GX24q-3	2,200/1,850	3000K	Warm White	82	5.5"	12,000	**10**
26001	**F32TBX/835/A/ECO**	97631	32	GX24q-3	2,200/1,850	3500K	Soft White	82	5.5"	12,000	**10**
26002	**F32TBX/841/A/ECO**	97632	32	GX24q-3	2,200/1,850	4100K	Cool White	82	5.5"	12,000	**10**
26005	**F42TBX/827/A/ECO**	97633	42	GX24q-4	3,200/2,690	2700K	Warm White	82	6.4"	12,000	**10**
26006	**F42TBX/830/A/ECO**	97634	42	GX24q-4	3,200/2,690	3000K	Warm White	82	6.4"	12,000	**10**
26007	**F42TBX/835/A/ECO**	97635	42	GX24q-4	3,200/2,690	3500K	Soft White	82	6.4"	12,000	**10**
26008	**F42TBX/841/A/ECO**	97636	42	GX24q-4	3,200/2,690	4100K	Cool White	82	6.4"	12,000	**10**

Triple Tube

COMPACT FLUORESCENT LAMPS PLUG-IN

T4 Triple Tube 4-Pin • GX24q-2, GX24q-3, GX24q-4 Base

Sylvania

Item #	Order Code	MFG#	Watts	Base	Lumens	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
26017	**CF18DT/E/IN/827/ECO**	20875	18	GX24q-2	1,164/1,001	2700K	Warm White	82	4.4"	12,000	**50**
26018	**CF18DT/E/IN/830/ECO**	20876	18	GX24q-2	1,164/1,001	3000K	Warm White	82	4.4"	12,000	**50**
26019	**CF18DT/E/IN/835/ECO**	20877	18	GX24q-2	1,164/1,001	3500K	Soft White	82	4.4"	12,000	**50**
26020	**CF18DT/E/IN/841/ECO**	20878	18	GX24q-2	1,164/1,001	4100K	Cool White	82	4.4"	12,000	**50**
26023	**CF26DT/E/IN/827/ECO**	20879	26	GX24q-3	1,746/1,501	2700K	Warm White	82	5"	12,000	**50**
26024	**CF26DT/E/IN/830/ECO**	20880	26	GX24q-3	1,746/1,501	3000K	Warm White	82	5"	12,000	**50**
26025	**CF26DT/E/IN/835/ECO**	20881	26	GX24q-3	1,746/1,501	3500K	Soft White	82	5"	12,000	**50**
26026	**CF26DT/E/IN/841/ECO**	20882	26	GX24q-3	1,746/1,501	4100K	Cool White	82	5"	12,000	**50**
26029	**CF32DT/E/IN/827/ECO**	20883	32	GX24q-3	2,328/2,002	2700K	Warm White	82	5.6"	12,000	**50**
26030	**CF32DT/E/IN/830/ECO**	20884	32	GX24q-3	2,328/2,002	3000K	Warm White	82	5.6"	12,000	**50**
26031	**CF32DT/E/IN/835/ECO**	20885	32	GX24q-3	2,328/2,002	3500K	Soft White	82	5.6"	12,000	**50**
26032	**CF32DT/E/IN/841/ECO**	20886	32	GX24q-3	2,328/2,002	4100K	Cool White	82	5.6"	12,000	**50**
26035	**CF42DT/E/IN/827/ECO**	20887	42	GX24q-4	3,104/2,670	2700K	Warm White	82	6.5"	12,000	**50**
26036	**CF42DT/E/IN/830/ECO**	20888	42	GX24q-4	3,104/2,670	3000K	Warm White	82	6.5"	12,000	**50**
26037	**CF42DT/E/IN/835/ECO**	20871	42	GX24q-4	3,104/2,670	3500K	Soft White	82	6.5"	12,000	**50**
26038	**CF42DT/E/IN/841/ECO**	20890	42	GX24q-4	3,104/2,670	4100K	Cool White	82	6.5"	12,000	**50**

Triple Tube

T4 Triple Tube 4-Pin • GX24q-3, GX24q-4 Base

GENERIC

Item #	Order Code	Watts	Base	Lumens	Color Temp.	Color	CRI	M.O.L.	Life (Hrs)	Pk. Qty.
26053	**CF26DT/E/827**	26	GX24q-3	1,800	2700K	Warm White	82	5.28"	10,000	**50**
26055	**CF26DT/E/835**	26	GX24q-3	1,800	3500K	Soft White	82	5.28"	10,000	**50**
26056	**CF26DT/E/841**	26	GX24q-3	1,800	4100K	Cool White	82	5.28"	10,000	**50**
26057	**CF26DT/E/850**	26	GX24q-3	1,800	5000K	Nat. White	82	5.28"	10,000	**50**
26058	**CF26DT/E/865**	26	GX24q-3	1,800	6500K	Daylight	82	5.28"	10,000	**50**
26059	**CF32DT/E/827**	32	GX24q-3	2,400	2700K	Warm White	82	5.79"	10,000	**50**
26061	**CF32DT/E/835**	32	GX24q-3	2,400	3500K	Soft White	82	5.79"	10,000	**50**
26062	**CF32DT/E/841**	32	GX24q-3	2,400	4100K	Cool White	82	5.79"	10,000	**50**
26063	**CF32DT/E/850**	32	GX24q-3	2,400	5000K	Nat. White	82	5.79"	10,000	**50**
26064	**CF32DT/E/865**	32	GX24q-3	2,400	6500K	Daylight	82	5.79"	10,000	**50**
26065	**CF42DT/E/827**	42	GX24q-4	3,200	2700K	Warm White	82	6.61"	10,000	**50**
26067	**CF42DT/E/835**	42	GX24q-4	3,200	3500K	Soft White	82	6.61"	10,000	**50**
26068	**CF42DT/E/841**	42	GX24q-4	3,200	4100K	Cool White	82	6.61"	10,000	**50**
26069	**CF42DT/E/850**	42	GX24q-4	3,200	5000K	Nat. White	82	6.61"	10,000	**50**
26070	**CF42DT/E/865**	42	GX24q-4	3,200	6500K	Daylight	82	6.61"	10,000	**50**

Triple Tube

COMPACT FLUORESCENT LAMPS SELF BALLASTED

Spiral - Super Mini Twist • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	M.O.L	Life (hrs)	Pk. Qty.
26230	**CF7EL/SUPER/827/RP**	29707	13	375/300	2700K	Warm White	4.2"	10,000	**6**
26242	**CF13EL/SUPER/827/RP**	29710	13	880/704	2700K	Warm White	4.2"	10,000	**6**
26247	**CF13EL/SUPER/850/RP**	29782	13	880/704	5000K	Nat. White	4.2"	10,000	**6**
26249	**CF13EL/SUPER/865/RP**	29711	13	880/704	6500K	Daylight	4.2"	10,000	**6**
26251	**CF19EL/SUPER/827/RP**	29693	19	1,200/960	2700K	Warm White	4.7"	10,000	**6**
26253	**CF19EL/SUPER/850/RP**	29683	19	1,200/960	5000K	Nat. White	4.7"	10,000	**6**
26254	**CF19EL/SUPER/865/RP**	29724	19	1,200/960	6500K	Daylight	4.7"	10,000	**6**
26256	**CF23EL/SUPER/827/RP**	29712	23	1,600/1,280	2700K	Warm White	5.06"	10,000	**6**
26259	**CF23EL/SUPER/850/RP**	29699	23	1,600/1,280	5000K	Nat. White	5.06"	10,000	**6**
26260	**CF23EL/SUPER/865/RP**	29674	23	1,600/1,280	6500K	Daylight	5.06"	10,000	**6**

Super Mini Twist

Spiral 5W-19Watt • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Lumens	Color Temp.	Color	CRI	M.O.L	Life (Hrs)	Pk. Qty.
26271	**CF5SP/27K**	5	250	2700K	Warm White	82	3.5"	10,000	**12**
26274	**CF5SP/41K**	5	250	4100K	Cool White	82	3.5"	10,000	**12**
26275	**CF5SP/50K**	5	250	5000K	Nat. White	82	3.5"	10,000	**12**
26283	**CF9SP/27K**	9	500	2700K	Warm White	82	4"	10,000	**12**
26286	**CF9SP/41K**	9	500	4100K	Cool White	82	4"	10,000	**12**
26287	**CF9SP/50K**	9	500	2700K	Nat. White	82	4"	10,000	**12**
26289	**CF11SP/27K**	11	700	2700K	Warm White	82	4"	8,000	**12**
26292	**CF11SP/41K**	11	700	4100K	Cool White	82	4"	8,000	**12**
26293	**CF11SP/50K**	11	700	5000K	Nat. White	82	4"	8,000	**12**
26295	**CF13SP/27K**	13	800	2700K	Warm White	82	4.19"	10,000	**12**
26298	**CF13SP/41K**	13	800	4100K	Cool White	82	4.19"	10,000	**12**
26299	**CF13SP/50K**	13	800	5000K	Nat. White	82	4.19"	10,000	**12**
26300	**CF13SP/65K**	13	800	6500K	Daylight	82	4.19"	10,000	**12**
26322	**CF15SP/27K**	15	1,100	2700K	Warm White	82	4.37"	10,000	**12**
26325	**CF15SP/41K**	15	1,100	4100K	Cool White	82	4.37"	10,000	**12**
26326	**CF15SP/50K**	15	1,100	5000K	Nat. White	82	4.37"	10,000	**12**
26328	**CF18SP/27K**	18	1,200	2700K	Warm White	82	4.52"	10,000	**12**
26331	**CF18SP/41K**	18	1,200	4100K	Cool White	82	4.52"	10,000	**12**
26332	**CF18SP/50K**	18	1,200	5000K	Nat. White	82	4.52"	10,000	**12**
26334	**CF19SP/27K**	19	1,200	2700K	Warm White	82	5.25"	12,000	**50**
26337	**CF19SP/41K**	19	1,200	4100K	Cool White	82	5.25"	12,000	**50**
26338	**CF19SP/50K**	19	1,200	5000K	Nat. White	82	5.25"	12,000	**50**

Spiral

COMPACT FLUORESCENT LAMPS SELF BALLASTED

Spirals 20W - 105W • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Bulb	Lumens	Color Temp.	Finish	CRI	M.O.L.	Life (hrs)	Pk. Qty.
26340	**CF20SP/27K**	20	T3	1,300	2700K	Warm White	82	5.25"	12,000	**50**
26343	**CF20SP/41K**	20	T3	1,300	4100K	Cool White	82	5.25"	12,000	**50**
26344	**CF20SP/50K**	20	T3	1,300	5000K	Nat. White	82	5.25"	12,000	**50**
26531	**CF23SP/27K**	23	T3	1,600	2700K	Warm White	82	5.13"	10,000	**50**
26533	**CF23SP/35K**	23	T3	1,600	3500K	Soft White	82	5.13"	10,000	**50**
26534	**CF23SP/41K**	23	T3	1,600	4100K	Cool White	82	5.13"	10,000	**50**
26535	**CF23SP/50K**	23	T3	1,600	5000K	Nat. White	82	5.13"	10,000	**50**
26543	**CF26SP/27K**	26	T3	1,750	2700K	Warm White	82	5.44"	10,000	**50**
26546	**CF26SP/41K**	26	T3	1,750	4100K	Cool White	82	5.44"	10,000	**50**
26547	**CF26SP/50K**	26	T3	1,750	5000K	Nat. White	82	5.44"	10,000	**50**
26576	**CF32SP/27K**	32	T3	2,100	2700K	Warm White	82	5.56"	10000	**12**
26580	**CF32SP/50K**	32	T3	2,100	5000K	Nat. White	82	5.56"	10000	**12**
26581	**CF32SP/65K**	32	T3	2,100	6500K	Daylight	82	5.56"	10000	**12**
26588	**CF40SP/27K**	40	T5	2,600	2700K	Warm White	82	7.28"	8000	**12**
26592	**CF40SP/50K**	40	T5	2,600	5000K	Nat. White	82	7.26	8000	**12**
26594	**CF42SP/27K**	42	T5	2,800	2700K	Warm White	82	7.06"	8000	**12**
26610	**CF55SP/50K**	55	T5	3,700	5000K	Nat. White	82	9.64"	10000	**6**
26612	**CF65SP/27K**	65	T5	3,400	2700K	Warm White	82	9.65"	8000	**6**
26616	**CF65SP/50K**	65	T5	3,400	5000K	Nat. White	82	9.65"	8000	**6**
26618	**CF85SP/27K**	85	T5	4,200	2700K	Warm White	82	10.24"	8000	**6**
26622	**CF85SP/50K**	85	T5	4,200	5000K	Nat. White	82	10.24"	8000	**6**
26640	**CF105SP/50K**	105	T5	5,000	5000K	Nat. White	82	11"	8000	**6**

Higher Wattage Multi U-Lamps - 5000K Daylight • E39 / Mogul Base

GENERIC

Item #	Order Code	Watts	Volts	Bulb	Lumens	M.O.L.	Dia.	Life (Hrs)	Pk. Qty.
26803	**CF150MU/50K**	150	120	T5	7,900	13.27"	3.60"	10,000	**EA**
26805	**CF150MU/50K/277V**	150	277	T5	7,900	13.27"	3.60"	10,000	**EA**
26807	**CF200MU/50K**	200	120	T5	9,500	13.58"	4.63"	10,000	**EA**
26808	**CF200MU/50K/277V**	200	277	T5	9,500	13.58"	4.63"	10,000	**EA**

T5 150W

T5 250W

COMPACT FLUORESCENT LAMPS SELF BALLASTED

T3 3-Way

T3 Dimmable

Yellow Bug

Spiral with Photocell

Spirals • E26 / Medium Base

GENERIC

Item #	Fig.	Order Code	Watts	Bulb	Lumens	Color Temp.	Color	M.O.L.	Life (hrs)	Pk. Qty.
26863	A	**CFSP/3-WAY/35K**	11/20/26	T3	700/1,320/1,700	3500K	Soft White	5.78	10,000	**50**
27010	B	**CF24SP/DIM/27K**	24	T3	1,600	2700K	Warm White	4.75"	8000	**12**
27140	C	**CF13SP/BUG**	13	T3	550	-	Yellow	4.66″	6000	**50**
27155	D	**CF23SP/PHOTO**	23	T3	1,600	2700K	Warm White		10,000	**6**

R20 • E26 / Medium Base

Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts	Lumens	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
27230	**CF14EL/R20/827**	Sylvania	29624	16	495/396	2700K	Warm White	82	4.25"	8,000	**6**
27259	**CF11R20/27K**	Generic	-	11	330	2700K	Warm White	82	4.45"	10,000	**6**
27262	**CF11R20/41K**	Generic	-	11	330	4100K	Cool White	82	4.45"	10,000	**6**
27263	**CF11R20/50K**	Generic	-	11	330	5000K	Natural White	82	4.45"	10,000	**6**

R20

R30 • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	Watts	Bulb	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
27340	**CF16EL/BR30/27K**	29591	16	BR30	750/600	2700K	Warm White	82	5.7"	8,000	**6**

BR30

COMPACT FLUORESCENT LAMPS SELF BALLASTED

R30 • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Bulb	Lumens	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
27357	**CF15R30/27K**	15	R30	650	2700K	Warm White	82	5.39"	8,000	**6**
27360	**CF15R30/41K**	15	R30	650	4100K	Cool White	82	5.39"	8,000	**6**
27361	**CF15R30/50K**	15	R30	650	5000K	Natural White	82	5.39"	8,000	**6**
27362	**CF15R30/65K**	15	R30	650	6500K	Daylight	82	5.39"	8,000	**6**
27364	**CF16R30/30K**	16	R30	750	3000K	Soft White	82	5.7	8,000	**6**
27366	**CF16R30/41K**	16	R30	750	4100K	Cool White	82	5.7	8,000	**6**
27367	**CF16R30/50K**	16	R30	750	5000K	Natural White	82	5.7	8,000	**6**

R30

R40 • E26 / Medium Base

Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts	Bulb	Lumens	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
27450	**CF23EL/ BR40/827/RP**	Sylvania	29452	23	R40	1,090	2700K	Warm White	82	6.5"	8,000	**6**
27479	**CF23R40/27K**	Generic	-	23	R40	1,090	2700K	Warm White	82	6.5"	10,000	**6**
27480	**CF23R40/30K**	Generic	-	23	R40	1,090	3000K	Soft White	82	6.5"	10,000	**6**
27482	**CF23R40/41K**	Generic	-	23	R40	1,090	4100K	Cool White	82	6.5"	10,000	**6**
27483	**CF23R40/50K**	Generic	-	23	R40	1,090	5000K	Natural White	82	6.5"	10,000	**6**

R40

Dimmable R30/R40 • E26 / Medium Base

GENERIC

Item #	Order Code	Watts	Bulb	Lumens	Color Temp.	Color	CRI	Dia.	M.O.L.	Life (hrs)	Pk. Qty.
27601	**CF16R20/DIM/27K**	16	R30	650	2700K	Warm White	82	3.75″	5"	10,000	**6**
27613	**CF16R30/DIM/27K**	16	R30	700	2700K	Warm White	82	3.75″	5.38"	10,000	**6**
27619	**CF19R40/DIM/27K**	19	R40	900	2700K	Warm White	82	5″	5.5"	10,000	**6**

R30/R40 Dimmable

COMPACT FLUORESCENT LAMPS SELF BALLASTED

PAR20 • E26 / Medium Base — GENERIC

Item #	Order Code	Watts	Lumens	Color Temp.	Color	M.O.L.	Life (hrs)	Pk. Qty.
27767	**CF11PAR20/27K**	11	380	2700K	Warm White	3.86"	10,000	**6**
27770	**CF11PAR20/41K**	11	380	4100K	Cool White	3.86"	10,000	**6**
27771	**CF11PAR20/50K**	11	380	5000K	Natural White	3.86"	10,000	**6**

PAR20

PAR30 • E26 / Medium Base — GENERIC

Item #	Order Code	Watts	Lumens	Color Temp.	Color	M.O.L.	Life (hrs)	Pk. Qty.
27927	**CF15PAR30/27K**	15	720	2700K	Warm White	4.63"	10,000	**6**
27930	**CF15PAR30/41K**	15	720	4100K	Cool White	4.63"	10,000	**6**
27931	**CF15PAR30/50K**	15	720	5000K	Natural White	4.63"	10,000	**6**

PAR30

PAR38 • E26 / Medium Base — GENERIC

Item #	Order Code	Watts	Lumen	Color Temp.	Color	M.O.L.	Life (hrs)	Pk. Qty.
28086	**CF20PAR38/65K**	20	800	6500K	Daylight	5.35″	8,000	**12**
28087	**CF23PAR38/27K**	23	1,050	2700K	Warm White	5.04″	10,000	**12**
28090	**CF23PAR38/41K**	23	1,050	4100K	Cool White	5.04″	10,000	**12**
28091	**CF23PAR38/50K**	23	1,050	5000K	Natural White	5.04″	10,000	**12**
28093	**CF24PAR38/27K**	24	1,100	2700K	Warm White	5.5″	8,000	**12**
28096	**CF24PAR38/41K**	24	1,100	4100K	Cool White	5.5″	8,000	**12**

PAR38

BR38 • E26 / Medium Base — GENERIC

Item #	Order Code	Watts	Lumen	Color Temp.	Color	M.O.L.	Life (hrs)	Pk. Qty.
28223	**CF23BR38/27K**	23	1,070	2700K	Warm White	6.50"	8,000	**6**
28226	**CF23BR38/41K**	23	1,070	4100K	Cool White	6.50"	8,000	**6**
28227	**CF23BR38/50K**	23	1,070	5000K	Nat. White	6.50"	8,000	**6**

BR38

COMPACT FLUORESCENT LAMPS SELF BALLASTED

Bullet, Globe, Torpedo, A Type Bulbs

GENERIC

Item #	Order Code	Fig.	Watts	Bulb	Base	Lumen	Color Temp.	Color	M.O.L.	Dia.	Life (hrs)	Pk. Qty.
28363	**CF15BULLET/27K**	A	15	CFL Bullet	E26/Medium	800	2700K	Warm White	5.51"	1.97"	10,000	**12**
28366	**CF15BULLET/41K**	A	15	CFL Bullet	E26/Medium	800	4100K	Cool White	5.51"	1.97"	10,000	**12**
28367	**CF15BULLET/50K**	A	15	CFL Bullet	E26/Medium	800	5000K	Nat. White	5.51"	1.97"	10,000	**12**
28515	**CF9GLOBE/27K**	B	9	CFL Globe	E26/Medium	500	2700K	Warm White	4.33"	3.11"	10,000	**12**
28518	**CF9GLOBE/41K**	B	9	CFL Globe	E26/Medium	500	4100K	Cool White	4.33"	3.11"	10,000	**12**
28519	**CF9GLOBE/50K**	B	9	CFL Globe	E26/Medium	500	5000K	Nat. White	4.33"	3.11"	10,000	**12**
28529	**CF15GLOBE/27K**	B	15	CFL Globe	E26/Medium	820	2700K	Warm White	4.72"	3.43"	10,000	**12**
28532	**CF15GLOBE/41K**	B	15	CFL Globe	E26/Medium	820	4100K	Cool White	4.72"	3.43"	10,000	**12**
28533	**CF15GLOBE/50K**	B	15	CFL Globe	E26/Medium	820	5000K	Nat. White	4.72"	3.43"	10,000	**12**
28719	**CF14A/27K**	F	14	A Lamp	E26/Medium	800	2700K	Warm White	4.5"		8,000	**50**
29007	**CF5CT/27K**	C	5	CFL Torpedo	Candelabra	220	2700K	Warm White	4.33"	1.77"	10,000	**12**
29013	**CF5MT/27K**	D	5	CFL Torpedo	E26/Medium	220	2700K	Warm White	4.45"	1.77"	10,000	**12**
29057	**CF7CT/27K**	C	7	CFL Torpedo	Candelabra	340	2700K	Warm White	4.69"	1.77"	10,000	**12**
29063	**CF7MT/27K**	D	7	CFL Torpedo	E26/Medium	340	2700K	Warm White	4.80"	1.77"	10,000	**12**
29101	**CF7T10/27K**	E	7	T10	E26/Medium	340	2700K	Warm White	4.80"	1.25"	10,000	**12**
29104	**CF7T10/41K**	E	7	T10	E26/Medium	340	4100K	Cool White	4.80"	1.25"	10,000	**12**
29105	**CF7T10/50K**	E	7	T10	E26/Medium	340	5000K	Nat. White	4.80"	1.25"	10,000	**12**

FLUORESCENT LAMPS

CONTENTS

Rapid Start T12 52
Slimline T12 52
High Output T12HO 53
Electronic T8 55
Electronic T8HO 58
Electronic T5HO 59
T12 U-Bend 60
Circline 61
Specialty 61

PROS

- Energy Efficient
- Several Color Options
- Long Life
- Good Lumen Maint.

CONS

- Requires Separate Ballast
- Temperature Sensitive
- Higher Initial Cost Over Incandescent

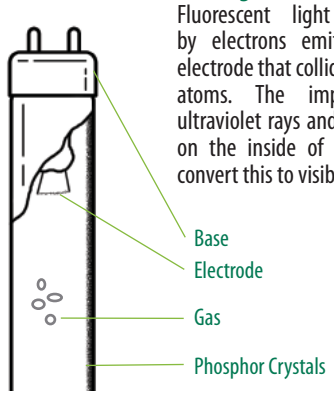

How Light is Produced

Fluorescent light is produced by electrons emitted from the electrode that collide with mercury atoms. The impact produces ultraviolet rays and the phosphors on the inside of the glass tube convert this to visible light.

6" - 21" T5 Pre-Heat • G5 / Mini Bi-Pin Base

Philips GE Sylvania

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30042	**F4T5/CW**	Philips	33236-1	4	135/95	4100K	Cool White	62	5.91"	6,000	**25**
30045	**F6T5/CW**	Philips	33241-1	6	295/230	4100K	Cool White	62	8.91"	7,500	**25**
30048	**F8T5/CW**	Philips	33247-8	8	400/300	4100K	Cool White	62	11.91"	7,500	**25**
30062	**F4T5/CW**	GE	10004	4	135/100	4100K	Cool White	60	5.91"	5,000	**24**
30065	**F6T5/CW**	GE	10032	6	295/235	4100K	Cool White	60	8.91"	5,000	**24**
30068	**F8T5/CW**	GE	10059	8	400/320	4100K	Cool White	60	11.91"	5,000	**24**
30071	**F13T5/CW**	GE	10086	13	850/705	4100K	Cool White	60	20.91"	5,000	**24**
30091	**F13T5/CW**	Sylvania	21316	13	860/748	4200K	Cool White	60	20.91"	7,500	**24**

T5 Pre-Heat

18" - 36" T8 Pre-Heat • G13 / Medium Bi-Pin Base

Philips GE Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30180	**F15T8/CW/ALTO**	Philips	36720-1	15	870/765	4100K	Cool White	62	17.78"	7,500	**24**
30186	**F30T8/CW/ALTO**	Philips	38691-2	30	1,500/1,350	6500K	Daylight	62	35.78"	7,500	**24**
30187	**F30T8/D/ALTO**	Philips	26063-8	30	2,200/2,000	4100K	Cool White	79	35.78"	7,500	**24**
30200	**F15T8/CW**	GE	10142	15	825/725	4100K	Cool White	60	17.78"	7,500	**24**
30201	**F15T8/D**	GE	10134	15	700/615	6500K	Daylight	75	17.78"	7,500	**24**
30222	**F18T8/CW/K24**	Sylvania	23014	18	1,190/1,035	4200K	Cool White	60	23.78"	7,500	**24**
30224	**F18T8/CW/K26**	Sylvania	23027	18	1,280/1,079	4200K	Cool White	60	25.78"	7,500	**24**
30226	**F18T8/CW/K28**	Sylvania	23028	18	1,360/1,131	4200K	Cool White	60	27.78"	7,500	**24**
30228	**F18T8/CW/K30**	Sylvania	23030	18	1,400/1,200	4200K	Cool White	60	29.78"	7,500	**24**
30236	**F14T8/CW**	Generic	-	14	685/580	4100K	Cool White	60	14.78"	7,500	**25**

T8 Pre-Heat

FLUORESCENT LAMPS

15" - 33" T12 Pre-Heat • G13 / Medium Bi-Pin Base

Philips Sylvania

Item #	Order Code	Brand	MFG#	Watt s	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30312	**F14T12/CW**	Philips	14151-5	14	710/590	4100K	Cool White	62	14.78"	9,000	**30**
30315	**F15T12/CW**	Philips	14149-9	15	800/695	4100K	Cool White	62	17.78"	9,000	**30**
30318	**F20T12/WW/ALTO**	Philips	27349-0	20	1,250/1,100	3000K	Warm White	53	23.78"	9,000	**30**
30319	**F20T12/CW/ALTO**	Philips	27332-6	20	1,200/1,050	4100K	Cool White	62	23.78"	9,000	**30**
30320	**F20T12/D/ALTO**	Philips	27328-4	20	960/960	6500K	Daylight	79	23.78"	9,000	**30**
30361	**F25T12/CW/28**	Sylvania	22527	25	1,670/1,453	4200K	Cool White	60	27.78"	7,500	**30**
30362	**F25T12/CW/30**	Sylvania	22528	25	1,730/1,505	4200K	Cool White	60	29.78"	7,500	**30**
30363	**F25T12/CW/33**	Sylvania	22529	25	1,850/1,610	4200K	Cool White	60	32.78"	7,500	**30**

T12 Pre-Heat

36" / 48" T12 Rapid Start • G13 / Medium Bi-Pin Base

Philips GE Sylvania

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30446	**F30T12/WW/RS/ALTO**	Philips	13221-7	30	2,300/1,950	3000K	Warm White	53	35.78"	18,000	**30**
30447	**F30T12/CW/RS/ALTO**	Philips	27242-7	30	2,250/1,900	4100K	Cool White	62	35.78"	18,000	**30**
30448	**F30T12/D/RS/ALTO**	Philips	37649-1	30	1,950/1,700	6500K	Daylight	79	35.78"	18,000	**30**
30450	**F34/WW/RS/EW/ALTO**	Philips	25686-7	34	2,700/2,350	3000K	Warm White	53	47.78"	20,000	**30**
30451	**F34/CW/RS/EW/ALTO**	Philips	24470-7	34	2,650/2,300	4100K	Cool White	62	47.78"	20,000	**30**
30452	**F40DX/ALTO**	Philips	27359-9	40	2,325/2,025	6500K	Daylight	84	47.78"	20,000	**30**
30501	**F34DX/RS/WM/ECO**	GE	80093	34	1,950/1,620	6500K	Daylight	84	47.78"	20,000	**30**
30542	**F34/CW/SS/ECO**	Sylvania	24596	34	2,650/2,279	4200K	Cool White	60	47.78"	20,000	**30**
30544	**F40CWX**	Sylvania	24441	40	2,150/1,849	4100K	Cool White	87	47.78"	20,000	**30**
30546	**F40/DX**	Sylvania	24477	40	2,180/1,770	6500K	Daylight	88	47.78"	20,000	**30**
30548	**F40DSGN50**	Sylvania	24683	40	2,200/1,892	5000K	Nat. White	90	47.78"	20,000	**30**

T12 Rapid Start

48" / 72" / 96" T12 Instant Start • Fa8 / Single Pin Base

Philips

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30711	**F48T12/CW/ALTO**	36321-8	39	2,950/2,600	4100K	Cool White	62	46"	9,000	**15**
30712	**F48T12/D/ALTO**	36219-4	39	2,500/2200	6500K	Daylight	79	46"	9,000	**15**
30718	**F72T12/CW/ALTO**	36989-2	56	4,450/3,900	4100K	Cool White	62	70"	12,000	**15**
30719	**F72T12/D/ALTO**	36985-0	56	3,800/3,350	6500K	Daylight	79	70"	12,000	**15**
30724	**F96T12/CW/EW/ALTO**	25840-0	60	5,400/4,750	4100K	Cool White	62	94"	12,000	**15**
30725	**F96T12/DX/ALTO**	37282-1	75	4,500/3,950	6500K	Daylight	84	94"	12,000	**15**

T12 Single Pin

FLUORESCENT LAMPS

T6 Instant Start • Fa8/ Single Pin Base

GE

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30735	**F42T6/CW**	10720	25	1,750/1,580	4100K	Cool White	60	40"	7,500	**24**
30737	**F64T6/CW**	10805	40	2,800/2,520	4100K	Cool White	60	62"	7,500	**24**

T6 Instant Start

36" - 96" T12 Slimline Instant Start • Fa8/ Single Pin Base

Sylvania

Item #	Order Code	MFG#	Watt s	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
30749	**F36T12/CW**	23618	30	1,970/1,734	4200K	Cool White	60	34"	7,500	**30**
30752	**F48T12/CW**	24830	39	2,820/2,482	4200K	Cool White	60	46"	9,000	**30**
30756	**F60T12/CW**	26001	50	3,700/3,256	4200K	Cool White	60	58"	12,000	**30**
30757	**F60T12/D**	26002	50	3,000/2,640	6500K	Daylight	76	58"	12,000	**30**
30760	**F64T12/CW**	26403	52	3,900/3,432	4200K	Cool White	60	62"	12,000	**30**
30761	**F64T12/D**	26404	52	3,300/2,904	6500K	Daylight	76	62"	12,000	**30**
30765	**F84T12/CW**	28417	70	5,300/4,664	4200K	Cool White	60	82"	12,000	**15**
30769	**F96T12/CW/SS**	29815	60	5,300/4,664	4200K	Cool White	60	94"	12,000	**15**
30770	**F96T12/DX**	29500	75	4,360/3,837	6500K	Daylight	88	94"	12,000	**15**

T12 Instant Start

30" - 96" T12 High Output • R17d/ Recessed DC Base

Philips

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31031	**F30T12/D/HO**	14141-6	40	1,920/1,590	6500K	Daylight	79	28"	9,000	**30**
31039	**F48T12/CW/HO/ALTO**	36978-5	60	4,050/3,500	4100K	Cool White	62	46"	12,000	**15**
31040	**F48T12/D/HO/ALTO**	36984-3	60	3,400/3,000	6500K	Daylight	79	46"	12,000	**15**
31048	**F72T12/CW/HO/ALTO**	36651-8	85	6,350/5,500	4100K	Cool White	62	70"	12,000	**15**
31049	**F72T12/D/HO/ALTO**	36653-4	85	5,600/4,850	6500K	Daylight	79	70"	12,000	**15**
31054	**F96T12/CW/HO-O/ALTO**	38176-4	110	8,800/7,650	4100K	Coolwhite	62	94"	12,000	**15**
31055	**F96T12/D/HO-O/ALTO**	38177-4	110	7,800/6,800	6500K	Daylight	79	94"	12,000	**15**

T12 HO

FLUORESCENT LAMPS

24" - 96" T12 High Output • R17d / Recessed DC Base

Sylvania

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31087	**F24T12/CW/HO**	25313	35	1,650/1,337	4200K	Cool White	60	21.91"	9,000	**30**
31088	**F24T12/D/HO**	25314	35	1,400/1,134	6500K	Daylight	76	21.91"	9,000	**30**
31089	**F30T12/CW/HO**	25322	42	2,250/1,825	4200K	Cool White	60	27.91"	9,000	**30**
31093	**F36T12/CW/HO**	25333	45	2,850/2,309	4200K	Cool White	60	33.91"	9,000	**30**
31094	**F36T12/D/HO**	25332	45	2,500/2,025	6500K	Daylight	76	33.91"	9,000	**30**
31096	**F42T12/CW/HO**	25342	55	3,400/2,754	4200K	Cool White	60	39.91"	9,000	**30**
31097	**F42T12/D/HO**	25343	55	3,050/2,471	6500K	Daylight	76	39.91"	9,000	**30**
31098	**F48T12/CW/HO**	25146	60	4,050/3,281	4200K	Cool White	60	46"	12,000	**30**
31099	**F48T12/D/HO**	25150	60	3,600/2,916	6500K	Daylight	76	46"	12,000	**30**
31102	**F60T12/CW/HO**	25126	75	5,200/4,212	4200K	Cool White	60	57.91"	12,000	**30**
31103	**F60T12/D/HO**	25120	75	4,600/3,826	6500K	Daylight	76	57.91"	12,000	**30**
31105	**F64T12/CW/HO**	25352	80	5,750/4,658	4200K	Cool White	60	61.91"	12,000	**30**
31106	**F64T12/D/HO**	25353	80	4,900/3,969	6500K	Daylight	76	61.91"	12,000	**30**
31108	**F72T12/CW/HO**	25176	85	6,250/5,063	4200K	Cool White	60	69.91"	12,000	**15**
31109	**F72T12/D/HO**	25189	85	5,550/4,496	6500K	Daylight	76	69.91"	12,000	**15**
31111	**F84T12/CW/HO**	25384	100	7,550/6,115	4200K	Cool White	60	81.91"	12,000	**15**
31112	**F84T12/D/HO**	25385	100	6,700/5,427	6500K	Daylight	76	81.91"	12,000	**15**
31113	**F96T12/CW/HO/COLD**	25134	110	8,600/6,966	4200K	Cool White	60	93.91"	12,000	**15**
31114	**F96T12/D/HO/COLD**	25135	110	7,600/6,156	6500K	Daylight	76	93.91"	12,000	**15**

T12 HO

18" - 118" T12 High Output • R17d / Recessed DC Base

Industrial

Item #	Order Code	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31116	**F18T12/D/HO**	25	1,100	6500K	Daylight	60	15.91"	9,000	**30**
31256	**F108T12/CW/HO**	124	10,350	4200K	Cool White	60	106"	12,000	**10**
31257	**F108T12/D/HO**	124	8,800	6500K	Daylight	60	106"	12,000	**10**
31258	**F117T12/CW/HO**	132	11,200	4200K	Cool White	60	115"	12,000	**10**
31259	**F117T12/D/HO**	132	9,500	6500K	Daylight	60	115"	12,000	**10**
31260	**F120T12/CW/HO**	135	11,500	4200K	Cool White	60	118"	12,000	**10**
31261	**F120T12/D/HO**	135	9,750	6500K	Daylight	60	118"	12,000	**10**

T12 HO

FLUORESCENT LAMPS

24" T8 Electronic • G13 / Medium Bi-Pin Base

Philips Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31432	**F17T8/TL730/ALTO**	Philips	36807-6	17	1,325/1,200	3000K	Warm White	78	23.78"	24,000	**25**
31433	**F17T8/TL735/ALTO**	Philips	36808-4	17	1,325/1,200	3500K	Soft White	78	23.78"	24,000	**25**
31434	**F17T8/TL741/ALTO**	Philips	36812-6	17	1,325/1,200	4100K	Cool White	78	23.78"	24,000	**25**
31442	**F17T8/TL865/ALTO**	Philips	38215-0	17	1,275/1,210	6500K	Daylight	85	23.78"	30,000	**25**
31482	**F017/730/ECO**	Sylvania	21918	17	1,300/1,170	3000K	Warm White	75	23.78"	20,000	**30**
31483	**F017/735/ECO**	Sylvania	21769	17	1,300/1,170	3500K	Soft White	75	23.78"	20,000	**30**
31484	**F017/741/ECO**	Sylvania	21770	17	1,300/1,170	4100K	Cool White	75	23.78"	20,000	**30**
31488	**F017/830/ECO**	Sylvania	22135	17	2,150/1,975	3000K	Warm White	82	23.78"	20,000	**30**
31489	**F017/835/ECO**	Sylvania	22136	17	2,150/1,975	3500K	Soft White	82	23.78"	20,000	**30**
31490	**F017/841/ECO**	Sylvania	22138	17	2,150/1,975	4100K	Cool White	82	23.78"	20,000	**30**
31510	**F17T8/750**	Generic	-	17	1,325/1,260	5000K	Natural White	78	23.78"	24,000	**25**

2' T8 Electronic

36" T8 Electronic • G13 / Medium Bi-Pin Base

Philips Sylvania GENERIC

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31592	**F25T8/TL730/ALTO**	Philips	36826-6	25	2,125/1,925	3000K	Warm White	78	35.78"	24,000	**25**
31593	**F25T8/TL735/ALTO**	Philips	36828-2	25	2,125/1,925	3500K	Soft White	78	35.78"	24,000	**25**
31594	**F25T8/TL741/ALTO**	Philips	36829-0	25	2,125/1,925	4100K	Cool White	78	35.78"	24,000	**25**
31602	**F25T8/TL865/ALTO**	Philips	38258-0	25	2,125/2,000	6500K	Daylight	85	35.78"	30,000	**25**
31642	**F025/730/ECO**	Sylvania	21937	25	1,950/1,755	3000K	Warm White	75	35.78"	20,000	**30**
31643	**F025/735/ECO**	Sylvania	21941	25	1,950/1,755	3500K	Soft White	75	35.78"	20,000	**30**
31644	**F025/741/ECO**	Sylvania	21942	25	1,950/1,755	4100K	Cool White	75	35.78"	20,000	**30**
31648	**F025/830/ECO**	Sylvania	22138	25	2,150/1,975	3000K	Warm White	82	35.78"	20,000	**30**
31649	**F025/835/ECO**	Sylvania	22139	25	2,150/1,975	3500K	Soft White	82	35.78"	20,000	**30**
31650	**F025/841/ECO**	Sylvania	22140	25	2,150/1,975	4100K	Cool White	82	35.78"	20,000	**30**
31670	**F25T8/750**	Generic	109346	25	2,125/2,025	5000K	Natural White	78	35.78"	24,000	**25**

3' T8 Electronic

FLUORESCENT LAMPS

48" T8 Electronic • G13 / Medium Bi-Pin Base

Philips

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31752	**F32T8/TL730/ALTO**	27252-6	32	2,800/2,660	3000K	Warm White	78	47.78"	24,000	**25**
31753	**F32T8/TL735/ALTO**	27249-2	32	2,800/2,660	3500K	Soft White	78	47.78"	24,000	**25**
31754	**F32T8/TL741/ALTO**	27248-4	32	2,800/2,660	4100K	Cool White	78	47.78"	24,000	**25**
31755	**F32T8/TL750/ALTO**	27268-2	32	2,700/2,550	5000K	Natural White	78	47.78"	24,000	**25**
31758	**F32T8/TL830/ALTO**	24667-8	32	2,950/2,800	3000K	Warm White	86	47.78"	24,000	**25**
31759	**F32T8/TL835/ALTO**	24670-2	32	2,950/2,800	3500K	Soft White	86	47.78"	24,000	**25**
31760	**F32T8/TL841/ALTO**	24671-0	32	2,950/2,800	4100K	Cool White	86	47.78"	24,000	**25**
31761	**F32T8/TL850/ALTO**	27229-4	32	2,850/2,710	5000K	Natural White	86	47.78"	24,000	**25**

4' T8 Electronic

48" T8 Electronic • G13 / Medium Bi-Pin Base

GE

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31786	**F32T8/SP30/ECO**	26666	32	2,800/2,660	3000K	Warm White	78	47.78"	30,000	**36**
31788	**F32T8/SP35/ECO**	26667	32	2,800/2,660	3500K	Soft White	78	47.78"	30,000	**36**
31789	**F32T8/SP41/ECO**	26668	32	2,800/2,660	4100K	Cool White	78	47.78"	30,000	**36**
31790	**F32T8/SP50/ECO**	16090	32	2750/2610	5000K	Natural White	78	47.78"	30,000	**36**
31791	**F32T8/SP65/ECO**	16091	32	2,700/2,565	6500K	Daylight	78	47.78"	30,000	**36**

4' T8 Electronic

48" T8 Electronic • G13 / Medium Bi-Pin Base

Sylvania

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31822	**F032/730/ECO**	21997	32	2,800/2,520	3000K	Warm White	78	47.78"	25,000	**30**
31823	**F032/735/ECO**	21998	32	2,800/2,520	3500K	Soft White	78	47.78"	25,000	**30**
31824	**F032/741/ECO**	21999	32	2,800/2,520	4100K	Cool White	78	47.78"	25,000	**30**
31825	**F032/750/ECO**	22141	32	2,650/2,385	5000K	Natural White	78	47.78"	25,000	**30**
31826	**F032/765/ECO**	22175	32	2,700/2,430	6500K	Daylight	78	47.78"	25,000	**30**
31828	**F032/830/ECO**	21777	32	2,950/2,802	3000K	Warm White	85	47.78"	30,000	**30**
31829	**F032/835/ECO**	21779	32	2,950/2,802	3500K	Soft White	85	47.78"	30,000	**30**
31830	**F032/841/ECO**	21781	32	2,950/2,802	4100K	Cool White	85	47.78"	30,000	**30**

4' T8 Electronic

FLUORESCENT LAMPS

48" T8 Low Watt • G13 / Medium Bi-Pin Base

Sylvania

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31835	**FO28/835/XP/SS/ECO**	22178	28	2,725/2,590	3500K	Soft White	85	47.78"	36,000	**30**
31836	**FO28/841/XP/SS/ECO**	22179	28	2,725/2,590	4100K	Cool White	85	47.78"	36,000	**30**
31842	**FO32/25W/835/XP/SS**	22233	25	2,475/2,350	3500K	Soft White	85	47.78"	36,000	**30**
31843	**FO32/25W/841/XP/SS**	22234	25	2,475/2,350	4100K	Cool White	85	47.78"	36,000	**30**

4' T8 Electronic

48" T8 Electronic • G13 / Medium Bi-Pin Base

GENERIC

Item #	Order Code	Brand	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
31857	**F32T8/735**	Generic	32	2,900	3500K	Soft White	78	47.78"	20,000	**25**
31858	**F32T8/741**	Generic	32	2,900	4100K	Cool White	78	47.78"	20,000	**25**
31859	**F32T8/750**	Generic	32	2,900	5000K	Nat. White	78	47.78"	20,000	**25**

60" T8 • G13 / Medium Bi-Pin Base

Sylvania

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
32012	**FO40/730/ECO**	22102	40	3,500/3,150	3000K	Warm White	75	59.61"	20,000	**30**
32013	**FO40/735/ECO**	22103	40	3,500/3,150	3500K	Soft White	75	59.61"	20,000	**30**
32014	**FO40/741/ECO**	22104	40	3,500/3,150	4100K	Cool White	75	59.61"	20,000	**30**
32019	**FO40/835/ECO**	22145	40	3,650/3,473	3500K	Soft White	82	59.61"	20,000	**30**
32020	**FO40/841/ECO**	22146	40	3,650/3,473	4100K	Cool White	82	59.61"	20,000	**30**

Polylux T8 • G13 / Medium Bi-Pin Base

GE

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
32138	**F58W/T8/835/PLYLX**	40120	58	5,200/4,940	3500K	Soft White	85	59.6"	20,000	**25**
32139	**F58W/T8/840/PLYLX**	40081	58	5,200/4,940	4000K	Cool White	85	59.6"	20,000	**25**
32144	**F70W/T8/835/PLYLX**	42792	70	6,300/5,985	3500K	Soft White	85	70"	20,000	**25**
32145	**F70W/T8/840/PLYLX**	42793	70	6,300/5,985	4100K	Cool White	85	70"	20,000	**25**

T8 Polylux

FLUORESCENT LAMPS

96" T8 / T8 High Output • Fa8 / Single Pin - R17d / Recessed DC Base

Sylvania OSRAM

Item #	Order Code	Brand	MFG#	Watts	Base	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
32282	**F096/735/ECO**	Sylvania	21737	59	Single Pin	5,700/5,130	3500K	Soft White	75	94"	15,000	**24**
32283	**F096/741/ECO**	Sylvania	21736	59	Single Pin	5,700/5,130	4100K	Cool White	75	94"	15,000	**24**
32286	**F096/765/ECO**	Osram	21558	59	Single Pin	5,700/5,130	6500K	Daylight	75	94"	15,000	**24**
32291	**F096/850/ECO**	Sylvania	22173	59	Single Pin	5,900/5,428	5000K	Nat. White	80	94"	15,000	**24**
32423	**F096/735/HO**	Sylvania	22204	86	Recessed DC	8,000/7,520	3500K	Soft White	78	93.91"	18,000	**24**
32424	**F096/741/HO**	Sylvania	22205	86	Recessed DC	8,000/7,520	4100K	Cool White	78	93.91"	18,000	**24**

T5 • G5 / Mini Bi-Pin Base

GE

Item #	Order Code	MFG#	Watts	Base	Lumens Initial/Mean	Color Temp.	Color	CRI	Nom. Length	Life (hrs)	Pk. Qty.
32522	**F14W/T5/830/ECO**	31590	14	G5	1,350/1,240	3000K	Warm White	85	21.6"	30,000	**40**
32523	**F14W/T5/835/ECO**	46671	14	G5	1,350/1,240	3500K	Soft White	85	21.6"	30,000	**40**
32524	**F14W/T5/841/ECO**	46673	14	G5	1,350/1,240	4100K	Cool White	85	21.6"	30,000	**40**
32525	**F14W/T5/850/ECO**	46674	14	G5	1,300/1,190	5000K	Natural White	85	21.6"	30,000	**40**
32526	**F14W/T5/865/ECO**	46676	14	G5	1,250/1,150	6500K	Daylight	85	21.6"	30,000	**40**
32657	**F21W/T5/830/ECO**	46677	21	G5	2,100/1,930	3000K	Warm White	85	33.4"	30,000	**40**
32658	**F21W/T5/835/ECO**	46684	21	G5	2,100/1,930	3500K	Soft White	85	33.4"	30,000	**40**
32659	**F21W/T5/841/ECO**	46687	21	G5	2,100/1,930	4100K	Cool White	85	33.4"	30,000	**40**
32660	**F21W/T5/850/ECO**	46688	21	G5	2,000/1,840	5000K	Natural White	85	33.4"	30,000	**40**
32661	**F21W/T5/865/ECO**	46689	21	G5	1,950/1,790	6500K	Daylight	85	33.4"	30,000	**40**
32792	**F28W/T5/830/ECO**	46704	28	G5	2,900/2,660	3000K	Warm White	85	45.2"	30,000	**40**
32793	**F28W/T5/835/ECO**	46705	28	G5	2,900/2,660	3500K	Soft White	85	45.2"	30,000	**40**
32794	**F28W/T5/841/ECO**	46706	28	G5	2,900/2,660	4100K	Cool White	85	45.2"	30,000	**40**
32795	**F28W/T5/850/ECO**	46707	28	G5	2,750/2,530	5000K	Natural White	85	45.2"	30,000	**40**
32796	**F28W/T5/865/ECO**	46708	28	G5	2,700/2,480	6500K	Daylight	85	45.2"	30,000	**40**
32927	**F35W/T5/830/ECO**	46724	35	G5	3,650/3,350	3000K	Warm White	85	57.1"	30,000	**40**
32928	**F35W/T5/835/ECO**	46727	35	G5	3,650/3,350	3500K	Soft White	85	57.1"	30,000	**40**
32929	**F35W/T5/841/ECO**	46735	35	G5	3,650/3,350	4100K	Cool White	85	57.1"	30,000	**40**
32930	**F35W/T5/850/ECO**	46742	35	G5	3,500/3,220	5000K	Natural White	85	57.1"	30,000	**40**
32931	**F35W/T5/865/ECO**	46743	35	G5	3,400/3,120	6500K	Daylight	85	57.1"	30,000	**40**

T5

FLUORESCENT LAMPS

T5 High Output • G5 / Mini Bi-Pin Base

GE

Item #	Order Code	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	Nom. Length	Life (hrs)	Pk. Qty.
33062	**F24W/T5/830/ECO**	46699	24	2,000/1,840	3000K	Warm White	85	21.6"	30,000	**40**
33063	**F24W/T5/835/ECO**	46700	24	2,000/1,840	3500K	Soft White	85	21.6"	30,000	**40**
33064	**F24W/T5/841/ECO**	46701	24	2,000/1,840	4100K	Cool White	85	21.6"	30,000	**40**
33065	**F24W/T5/850/ECO**	46702	24	1,900/1,740	5000K	Natural White	85	21.6"	30,000	**40**
33066	**F24W/T5/865/ECO**	46703	24	1,880/1,740	6500K	Daylight	85	21.6"	30,000	**40**
33197	**F39W/T5/830/ECO**	46744	39	3,500/3,220	3000K	Warm White	85	33.4"	30,000	**40**
33198	**F39W/T5/835/ECO**	46745	39	3,500/3,220	3500K	Soft White	85	33.4"	30,000	**40**
33199	**F39W/T5/841/ECO**	46746	39	3,500/3,220	4100K	Cool White	85	33.4"	30,000	**40**
33200	**F39W/T5/850/ECO**	46747	39	3,350/3,080	5000K	Natural White	85	33.4"	30,000	**40**
33201	**F39W/T5/865/ECO**	46748	39	3,330/3,060	6500K	Daylight	85	33.4"	30,000	**40**

T5 High Output

T5 High Output • G5 / Mini Bi-Pin Base

Philips GE GENERIC

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	Nom. Length	Life (hrs)	Pk. Qty.
33312	**F54T5/830/HO/ALTO**	Philips	29026-2	54	5,000/4,750	3000K	Warm White	85	45.12"	25,000	**40**
33313	**F54T5/835/HO/ALTO**	Philips	29028-8	54	5,000/4,750	3500K	Soft White	85	45.12"	25,000	**40**
33314	**F54T5/841/HO/ALTO**	Philips	29083-3	54	5,000/4,750	4100K	Cool White	85	45.12"	25,000	**40**
33315	**F54T5/850/HO/ALTO**	Philips	13510-3	54	4,850/4,625	5000K	Natural White	82	45.12"	25,000	**40**
33316	**F54T5/865/HO/ALTO**	Philips	14745-4	54	4,750/4,500	6500K	Daylight	82	45.12"	25,000	**40**
33332	**F54W/T5/830/ECO**	GE	46759	54	5,000/4,600	3000K	Warm White	85	45.2"	30,000	**40**
33333	**F54W/T5/835/ECO**	GE	46760	54	5,000/4,600	3500K	Soft White	85	45.2"	30,000	**40**
33334	**F54W/T5/841/ECO**	GE	46761	54	5,000/4,600	4100K	Cool White	85	45.2"	30,000	**40**
33335	**F54W/T5/850/ECO**	GE	46762	54	4,800/4,410	5000K	Natural White	85	45.2"	30,000	**40**
33336	**F54W/T5/865/ECO**	GE	46763	54	4,750/4,370	6500K	Daylight	85	45.2"	30,000	**40**
33373	**F54T5/835/HO**	Generic		54	4,950	3500K	Soft White	82	45.12"	20,000	**25**
33374	**F54T5/841/HO**	Generic		54	4,950	4100K	Cool White	82	45.12"	20,000	**25**
33375	**F54T5/850/HO**	Generic		54	4,950	5000K	Natural White	82	45.12"	20,000	**25**

FLUORESCENT LAMPS

T12 U-Bend • G13 / Medium Bi-Pin Base

Philips GE Sylvania

Item #	Order Code	Fig.	Brand	Part#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
33582	**FB34/WW/6/EW/ALTO**	A	Philips	37862-0	34	2,400/2,050	3000K	Warm White	53	22.44"	18,000	**12**
33583	**FB34/CW/6/EW/ALTO**	A	Philips	37863-8	34	2,400/2,050	4100K	Cool White	62	22.44"	18,000	**12**
33584	**FB40/DX/6**	A	Philips	21993-1	40	2,250/1,950	6500K	Daylight	84	22.44"	18,000	**12**
33606*	**F35CW/U/3/WM**	A	GE	12199	35	2,200/2,050	4100K	Cool White	60	22.5"	14,000	**12**
33621	**FB34/WW/SS/ECO**	A	Sylvania	24052	34	2,650/2,279	3000K	Warm White	52	22.6"	18,000	**12**
33622	**FB34/CW/6/SS/ECO**	A	Sylvania	24054	34	2,600/2,236	4200K	Cool White	60	22.6"	18,000	**12**

*** 3" Leg Spacing**

T8 U-Bend • G13 / Medium Bi-Pin Base

Philips

Item #	Order Code	Fig.	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
33717	**FB32T8/TL730/6/ALTO**	B	37892-7	32	2,650/2,370	3000K	Warm White	78	22.44"	20,000	**20**
33718	**FB32T8/TL735/6/ALTO**	B	37893-5	32	2,650/2,370	3500K	Soft white	78	22.44"	20,000	**20**
33719	**FB32T8/TL741/6/ALTO**	B	37894-3	32	2,650/2,370	4100K	Cool White	78	22.44"	20,000	**20**
33720	**FB32T8/TL750/6/ALTO**	B	37882-8	32	2,600/2,325	5000K	Natural White	78	22.44"	20,000	**20**
33723	**FB32T8/TL830/6/ALTO**	B	37897-6	32	2,600/2,325	3000K	Warm White	85	22.44"	20,000	**20**
33724	**FB32T8/TL835/6/ALTO**	B	37900-8	32	2,800/2,535	3500K	Soft White	85	22.44"	20,000	**20**
33725	**FB32T8/TL841/6/ALTO**	B	37902-4	32	2,800/2,535	4100K	Cool White	85	22.44"	20,000	**20**
33726	**FB32T8/TL850/6/ALTO**	B	37880-2	32	2,750/2,500	5000K	Natural White	82	22.44"	20,000	**20**

T8 U-Bend • G13 / Medium Bi-Pin Base

Sylvania

Item #	Order Code	Fig.	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
33733	**FB032/735/6/ECO**	B	22051	32	2,750/2,475	3500K	Soft White	75	22.6"	20,000	**16**
33734	**FB032/741/6/ECO**	B	22052	32	2,750/2,475	4100K	Cool White	75	22.6"	20,000	**16**
33744	**FB031/830**	C	21877	31	2,725/2,507	3000K	Warm White	82	22.6"	20,000	**15**
33745	**FB031/835**	C	21878	31	2,725/2,507	3500K	Soft White	82	22.6"	20,000	**15**
33746	**FB031/841**	C	21879	31	2,725/2,507	4100K	Cool White	82	22.6"	20,000	**15**
33747	**FB031/750**	C	21819	31	2,600/2,340	5000K	Natural White	75	22.6"	20,000	**15**

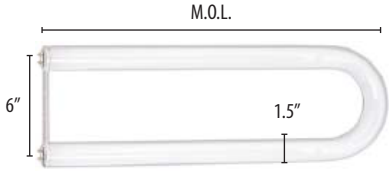

A **T12 U-Bend**

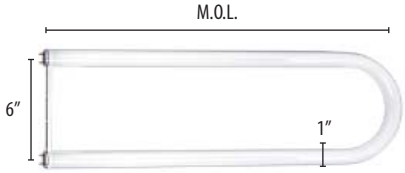

B **T8 U-Bend**

C **T8 U-Bend** with 1.63" Leg Spacing

FLUORESCENT LAMPS

T9 Circline 4-Pin

Philips GE Sylvania

Item #	Order Code	Brand	MFG#	Watts	Lumens Initial/Mean	Color Temp.	Color	CRI	Nom. Dia.	Life (hrs)	Pk. Qty.
33946	**FC16T9/CW/PLUS**	Philips	39118-5	40	2,500/1,975	4100K	Cool White	62	16"	12,000	**12**
33950	**FC6T9/CW**	GE	33950	20	800/560	4100K	Cool White	60	6"	12,000	**12**
33952	**FC8T9/CW**	GE	33774	20	1,100/825	4100K	Cool White	60	8"	12,000	**12**
33953	**FC8T9/D**	GE	11026	22	925/690	3500K	Daylight	75	8"	12,000	**20**
33955	**FC12T9/CW**	GE	33890	32	1,950/1,460	4100K	Cool White	60	12″	12,000	**12**
33956	**FC12T9/D**	GE	11039	32	1,675/1,260	6500K	Daylight	75	12″	12,000	**12**
33967	**FC6T9/CW/RS**	Sylvania	20156	20	750/653	4200K	Cool White	60	6"	8000	**12**
33969	**FC8T9/WW/RS**	Sylvania	20088	22	1,050/914	3000K	Warm White	52	8"	12,000	**12**
33970	**FC8T9/CW/RS**	Sylvania	20148	22	1,050/914	4200K	Cool White	60	8"	12,000	**12**
33971	**FC8T9/D/RS**	Sylvania	20080	22	900/783	6500K	Daylight	76	8"	12,000	**12**
33973	**FC12T9/CW/RS**	Sylvania	20142	32	1,925/1,675	4200K	Cool White	60	12″	15,000	**12**
33974	**FC12T9/D/RS**	Sylvania	20030	32	1,650/1,436	6500K	Daylight	76	12″	15,000	**12**

T9 Circline

Specialty Fluorescents • G13 / Medium Bi-Pin Base

GE Industrial GENERIC

Item #	Order Code	Brand	MFG#	Watts	Bulb	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
34200	**F20T12/BL**	GE	10244	20	T12	-	-	Blacklight		23.78"	9,000	**6**
34205	**F20T12/BLB**	GE	34747	20	T12	-	-	Blacklight Blue		23.78"	9,000	**6**
34245	**F40T12/BL**	GE	10526	40	T12	-	-	Blacklight		47.78"	20,000	**6**
34250	**F40T12/BLB**	GE	10531	40	T12	-	-	Blacklight Blue		47.78"	20,000	**6**
34360	**F32T8/GREEN**	Industrial	-	32	T8	3650	-	Green		47.78"	20,000	**30**
34362	**F32T8/RED**	Industrial	-	32	T8	250	-	Red		47.78"	20,000	**30**
34400	**F40T12/GREEN**	Industrial	-	40	T12	4100	-	Green		47.78"	20,000	**30**
34402	**F40T12/RED**	Industrial	-	40	T12	280	-	Red		47.78"	20,000	**30**
34460	**F40T10/4100K**	Generic	-	40	T10	3,625/3,440	4100	Cool White	86	47.78"	20,000	**25**
34461	**F40T10/5000K**	Generic	-	40	T10	3,600/3,420	5000	Natural White	86	47.78"	20,000	**30**

Colors

Green* Red Blacklight Blue Blacklight

* Emits green only when on

HID LAMPS

CONTENTS

Mercury Vapor 62
Metal Halide 64
Metal Halide Protected 65
Metal Halide Pulse Start 71
Metal Halide Bi-Pin 72
Metal Halide Par Lamps 72
High Pressure Sodium 73
Low Pressure Sodium 75

PROS

- Energy Efficient
- Long Life
- Good Lumen Maintenance

CONS

- Poor Color Quality (Except metal halides)
- Restrike Time
- Ballast Required

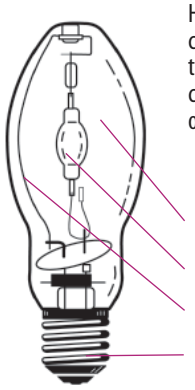

How Light is Produced

HID lamps produce light by creating an electric arc in the arc tube. This causes the chemicals to vaporize and give off ultraviolet and visible light.

Mercury Vapor • E26 / Medium Base

Philips GE Sylvania

Item #	Order Code	Fig.	Brand	MFG#	ANSI	Watts	Bulb	Lumen Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
35202	**HPL-N/50W**	A	Philips	17991-3	-	50	BD55	-	4200K	50	5.12″	-	**12**
35205	**H43AV-75/DX**	B	Philips	27524-8	H43	75	B17	2,800/2,250	3200K	45	5.44″	24,000	**12**
35207	**HPL-N/80W**	C	Philips	17997-5	-	80	BD70	-	4200K		6.1″	-	**12**
35225	**HR100DX38/MED**	B	GE	17113	H38	100	B17	4,000/2,600	3800K	50	5.44″	18,000	**5**
35226	**HR100DX38/A23**	D	GE	12467	H38	100	A23.5	4,000/2,600	3900K	50	5.44″	18,000	**5**
35228	**HR100FL38**	E	GE	36238	H38	100	R40	2,450/2,000	2000K	15	7″	24,000	**12**
35229	**HR100RDXFL38**	E	GE	36495	H38	100	R40	2,450/2,050	2050K	50	7″	24,000	**12**
35230	**HR175RFL39**	E	GE	24058	H39			Discontinued					**12**
35231	**HR175DXFL39**	E	GE	33026	H39	175	R40	5,700/4,350	3900K	50	7″	24,000	**12**
35268	**H44GS-100/MDSK**	F	Sylvania	68846	H44	100	PAR38	2,500/1,950	5,900K	20	5.44″	16,000	**12**

HID LAMPS MERCURY VAPOR

Mercury Vapor • E39 / Mogul Base

Sylvania

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	Finish	CRI	M.O.L.	Life (hrs)	Pk. Qty.
35412	**H38JA-100/DX**	A	69408	H38	100	ED23.5	4,100/3,300	4000K	Coated	45	7.5″	24,000	**20**
35413	**H39KB-175**	B	69444	H39	175	ED28	7,700/7,150	5900K	Clear	22	8.25″	24,000	**6**
35414	**H39KC-175/DX**	C	69445	H39	175	ED28	8,400/6,800	4000K	Coated	45	8.25″	24,000	**6**
35416	**H37KC-250/DX**	C	69448	H37	250	ED28	12,500/10,000	4000K	Coated	45	8.25″	24,000	**6**
35418	**H33GL-400/DX**	D	69450	H33	400	ED37	23,000/16,200	4000K	Coated	43	11.5″	24,000	**6**
35420	**H36GW-1000/DX**	E	69331	H36	1000	BT56	58,000/48,500	4000K	Coated	45	15.37″	24,000	**6**

ED23.5 Mercury Vapor Coated

ED28 Mercury Vapor Clear

ED28 Mercury Vapor Coated

ED37 Mercury Vapor Coated

BT56 Mercury Vapor Coated

Self Ballasted Mercury Vapor

GENERIC

Item #	Order Code	Fig.	Watts	Bulb	Base	Lumens Initial/Mean	Color Temp.	Finish	CRI	M.O.L.	Life (hrs)	Pk. Qty.
35596	**MV100/SB**	A	100	ED23.5	E26/Medium	1,000/700	3200K	Deluxe Coated	50	7.5"	10,000	**12**
35598	**MV160/SB**	A	160	ED23.5	E26/Medium	2,300/1,500	3200K	Deluxe Coated	50	7.5"	10,000	**12**
35600	**MV250/SB/120V**	B	250	ED28	E39/Mogul	5,000/3,700	3200K	Deluxe Coated	50	8.25″	10,000	**12**

ED23.5

ED28

HID LAMPS METAL HALIDE - MEDIUM BASE

ED17 Metal Halide • E26 / Medium Base

Philips

Item #	Order Code	Brand	MFG#	ANSI	Watts	Finish	Lumens	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36005	**MH70/U/M/PS**	Philips	13750-5	M98/E	70	Clear	3,600V/3,300H	4000K	65	10,000	**24**
36007	**MH100/U/M/PS**	Philips	13751-3	M90/E	100	Clear	5,900V/5,300H	4000K	65	10,000	**24**
36008	**MH150/U/M/PS**	Philips	13752-1	M102/E	150	Clear	10,500V/9,500H	4000K	65	10,000	**24**
36024	**MH175/U/M**	Philips	31358-5	M57/E	175	Clear	13,500/9,100	4000K	65	10,000	**12**
36025	**MH175/C/U/M**	Philips	31359-3	M57/E	175	Coated	13,000/8,380	3700K	65	10,000	**12**

ED17 MH Clear

ED17 Metal Halide • E26 / Medium Base

GE

Item #	Order Code	Brand	MFG#	ANSI	Watts	Finish	Lumens	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36033	**MXR50/U/MED**	GE	10361	M110/E	50	Clear	3,200/2,100	3700K	60	10,000	**6**
36035	**MXR70/U/MED**	GE	22158	M98/E	70	Clear	5,500/3,500	3200K	70	12,000	**6**
36037	**MXR100/U/MED**	GE	18680	M90/E	100	Clear	9,000/6,200	3200K	70	15,000	**6**
36039	**MXR150/U/MED**	GE	22935	M102/E	150	Clear	13,300/10,000	3400K	60	15,000	**6**
36051	**MVR175/U/MED**	GE	18902	M57/E	175	Clear	7,400H/8,800V	4000K	65	6000H 10000V	**6**

ED17 MH Coated

ED17 Metal Halide • E26 / Medium Base

GENERIC

Item #	Order Code	Brand	MFG#	ANSI	Watts	Finish	Lumens	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36093	**MH50/U/MED**	Generic	-	M110/E	50	Clear	3,400/2,200	4200K	65	10,000	**12**
36095	**MH70/U/MED**	Generic	-	M98/E	70	Clear	5,600/3,600	4200K	65	10,000	**12**
36097	**MH100/U/MED**	Generic	-	M90/E	100	Clear	9,000/5,900	4200K	65	10,000	**12**
36099	**MH150/U/MED**	Generic	-	M102/E	150	Clear	14,000/10,500	4200K	65	10,000	**12**
36101	**MH175/U/MED**	Generic	-	M57/E	175	Clear	17,500/12,800	4200K	65	10,000	**12**

ED17 Metal Halide - Pulse Start • E26 / Medium Base

GENERIC Venture

Item #	Order Code	Brand	MFG#	ANSI	Watts	Finish	Lumens	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36106	**MS175/PS/U/MED**	Generic	-	M152/E M137/E	175	Clear	17,000/12,500	4200K	65	15,000	**12**
36110	**MS200/PS/BU/MED**	Generic	-	M136/E	200	Clear	19,000/13,500	4200K	65	15,000	**12**
36115	**MS200W/BU/MED/PS**	Venture	60811	M136/E	200	Clear	21,000/16,800	4000K	65	12,000	**12**

HID LAMPS METAL HALIDE - MEDIUM BASE

ED17 Metal Halide • E26 / Medium Base

Venture

Item #	Order Code	MFG#	ANSI	Watts	Finish	Lumens Initial/Mean	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36123	**MH50W/U/PS**	52312	M110	50	Clear	2,200V/2,000H	4000K	65	10,000V 7500H	**12**
36125	**MH70W/U/PS**	78138	M98	70	Clear	3,600V/3,300H	4000K	65	15,000V 11,250H	**12**
36127	**MH100W/U/PS**	27266	M90	100	Clear	5,900V/5,300H	4000K	65	15,000V 11,250H	**12**
36129	**MH150W/U/PS**	99584	M102	150	Clear	10,500V/9,500H	4000K	68	15,000V 11,250H	**12**
36141	**MH175W/U/MED**	15556	M57	175	Clear	14,000/9,100	4000K	65	10,000	**12**
36143	**MH175W/C/U/MED**	63187	M57	175	Coated	13,300/8,600	3700K	70	10,000	**12**

ED17 MH Clear

ED17 Ceramic Metal Halide • E26 / Medium Base

Philips

Item #	Order Code	MFG#	ANSI	Watts	Finish	Lumens Initial/Mean	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36192	**MHC50/U/M/4K/ALTO**	36023-0	M148/M110/E	50	Clear	3,750/2,550	4000K	92	20,000	**12**
36197	**MHC70/U/M/4K/ALTO**	28129-5	M143/M98/E	70	Clear	5,900/4,130	4000K	92	24,000	**12**
36202	**MHC100/U/M/4K/ALTO**	28135-2	M140/M90/E	100	Clear	9,000/6,750	4000K	92	24,000	**12**

ED17 MHC Clear

ED17 Metal Halide - Base Protected • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	ANSI	Watts	Finish	Lumens Initial/Mean	Color Temp.	CRI	Life (hrs)	Pk. Qty.
36433	**MP50/U/MED**	64587	M110/0	50	Clear	3,450/1,900	3000K	70	20,000V 10,000H	**20**
36434	**MP50/C/U/MED**	64588	M110/0	50	Coated	3,200/1,820	2900K	70	20,000V 10,000H	**20**
36435	**MP70/U/MED**	64547	M98/0	70	Clear	5,200/3,400	3000K	75	15,000V 10,000H	**20**
36436	**MP70/C/U/MED**	64546	M98/0	70	Coated	4,700/3,100	2900K	75	15,000V 10,000H	**20**
36437	**MP100/U/MED**	64417	M90/0	100	Clear	8,500/5,525	3000K	75	15,000V 10,000H	**20**
36438	**MP100/C/U/MED**	64418	M90/0	100	Coated	7,900/5,800	2900K	75	15,000V 10,000H	**20**
36439	**MP150/U/MED**	64402	M102/0	150	Clear	12,900/8000	3000K	75	15,000V 10,000H	**20**
36440	**MP150/C/U/MED**	64406	M102/0	150	Coated	11,600/7500	2900K	75	15,000V 10,000H	**20**
36452	**MP175/BU/ONLY/MED**	64733	M57/0	175	Clear	14,440/10,800	3600K	65	10,000	**20**

ED17 MH Protected

ED17 MH Coated Protected

HID LAMPS METAL HALIDE - MEDIUM / MOGUL BASE

ED17 Protected Metal Halide • E26 / Medium Base

GENERIC

Item #	Order Code	ANSI	Watts	Lumens Initial/Mean	Color Temp.	Finish	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36463	**MP50/U/MED**	M110/0	50	3,400/1,700	4200K	Clear	65	5.43"	10,000	**12**
36465	**MP70/U/MED**	M98/0	70	5,200/3,500	4200K	Clear	65	5.43"	15,000	**12**
36467	**MP100/U/MED**	M90/0	100	8,500/6,200	4200K	Clear	65	5.43"	15,000	**12**
36469	**MP150/U/MED**	M102/0	150	12,900/8,600	4200K	Clear	65	5.43"	15,000	**12**
36471	**MP175/U/MED**	M57/0	175	14,000/9,300	4200K	Clear	65	5.43"	15,000	**12**

ED17 Metal Halide Clear

Metal Halide • E39 / Mogul Base

Philips

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	Finish	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36562	**MH175/U**	A	28733-4	M57/E	175	ED28	13,500/8775	4000K	Clear	65	8.25"	10,000	**12**
36564	**MH250/U**	A	27484-5	M58/E	250	ED28	20,500/13,500	4000K	Clear	65	8.25"	10,000	**12**
36566	**MH400/U**	B	34415-0	M59/S	400	ED37	36,000/24,000	4000K	Clear	65	11.5"	20,000	**6**
36568	**MH400/U/ED28**	A	27862-2	M59/E	400	ED28	36,000/24,000	4000K	Clear	63	8.25"	20,000	**12**
36570	**MH1000/U**	D	29826-5	M47/S	1000	BT56	110,000/71,000	3700K	Clear	65	15.37"	12,000	**6**
36572	**MH1000/U/BT37**	C	32150-5	M47/E	1000	BT37	110,000/71,500	3700K	Clear	65	11.5"	10,000	**6**
36574	**MH1500/U**	D	13162-3	M48/E	1500	BT56	155,000/124,000	3700K	Clear	60	15.37"	3,000	**6**

ED28 Metal Halide

ED37 Metal Halide

BT37 Metal Halide

BT56 Metal Halide

HID LAMPS METAL HALIDE - MOGUL BASE

Metal Halide • E39 / Mogul Base

GE

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Finish	Bulb	Lumens Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36592	**MVR175/U**	A	47760	M57/E	175	Clear	ED28	7,900H / 8,800V	4000K	65	8.25"	6000H/10,000V	**12**
36593	**MVR175/C/U**	B	47761	M57/E	175	Coated	ED28	7,900H / 8,800V	3900K	70	8.25"	6000H/10,000V	**12**
36594	**MVR250/U**	A	42729	M58/E	250	Clear	ED28	12,400H / 13,500V	4200K	65	8.25"	6000H/10,000V	**12**
36595	**MVR250/C/U**	B	42731	M58/E	250	Coated	ED28	11,600H / 13,000V	3900K	70	8.25"	6000H/10,000V	**12**
36596	**MVR400/U**	C	43828	M59/S	400	Clear	ED37	22,100H / 23,500V	4000K	65	11.5"	15,000H/20,000V	**6**
36597	**MVR400/C/U**	D	43829	M59/S	400	Coated	ED37	19,300H / 23,000V	3700K	70	11.5"	15,000H/20,000V	**6**
36598	**MVR400/U/ED28**	A	18904	M59/E	400	Clear	ED28	22,100H / 23,500V	4000K	65	8.25"	15,000H/20,000V	**12**
36600	**MVR1000/U**	E	41826	M47/S	1,000	Clear	BT56	79,000H / 86,000V	4000K	65	15.37"	11,000H/15,000V	**6**
36601	**MVR1000/C/U**	F	41827	M47/S	1,000	Coated	BT56	73,000H / 80,000V	3700K	65	15.37"	11,000H/15,000V	**6**
36602	**MVR1000/U/BT37**	G	18205	M47/E	1,000	Clear	BT37	82,000H / 90,000V	3700K	65	11.5"	9000H/12,000V	**6**

ED28 Metal Halide Clear

ED28 Metal Halide Coated

ED37 Metal Halide Clear

ED37 Metal Halide Coated

BT56 Metal Halide Clear

BT56 Metal Halide Coated

BT37 Metal Halide Clear

HID LAMPS METAL HALIDE - MOGUL BASE

Metal Halide • E39 / Mogul Base

Sylvania

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Finish	Bulb	Lumens Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36622	**M175/U**	A	64471	M57/E	175	Clear	BT28	9,300	4200K	65	8.25″	10,000V / 7,500H	**6**
36624	**M250/U**	A	64457	M58/E	250	Clear	BT28	15,000V / 13,000H	4200K	65	8.25″	10,000V / 7,500H	**6**
36626	**M250/U/ET18**	B	64474	M58/E	250	Clear	ET18	17,500V / 13,500H	4000K	65	9.75″	10,000V / 7,500H	**10**
36628	**M400/U**	C	64490	M59/S	400	Clear	BT37	23,500V / 20,500H	4000K	65	11.5″	20,000V / 15,000H	**6**
36630	**M400/U/BT28**	A	64488	M59/E	400	Clear	BT28	25,000V / 20,500H	4000K	65	8.25″	20,000V / 15,000H	**6**
36632	**M400/U/ET18**	B	64575	M59/E	400	Clear	ET18	25,000V / 21,500H	4000K	65	9.75″	20,000V / 15,000H	**10**
36634	**M1000/U**	D	64468	M47/S	1000	Clear	BT56	86,000V / 86,000H	4000K	65	15.37″	18,000V / 12,000H	**6**
36636	**M1000/U/BT37**	C	64469	M47/E	1000	Clear	BT37	96,000V / 86,300H	3800K	65	11.5″	15,000V / 9,000H	**6**
36638	**M1500/BU-HOR**	D	64431	M48/E	1500	Clear	BT56	140,000	4000K	70	15.37″	3,000	**6**

BT28 Metal Halide

ET18 Metal Halide

BT37 Metal Halide

BT56 Metal Halide

HID LAMPS METAL HALIDE - MOGUL BASE

Metal Halide • E39 / Mogul Base

GENERIC

Item #	Order Code	Fig.	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36648	**MH70/U/ED28**	A	M98/E	70	ED28	5,600/4,760	4200K	65	8.25"	15,000	**12**
36650	**MH100/U/ED28**	A	M90/E	100	ED28	9,000	4200K	65	8.25"	15,000	**12**
36652	**MH150/U/ED28**	A	M102/E	150	ED28	8,500/7,500	4200K	65	8.25"	15,000	**12**
36654	**MH175/U**	A	M57/E	175	ED28	12,000/10,000	4200K	65	8.25"	10,000	**12**
36656	**MH175/HOR/T15**	B	M57/E	175	T15	13,600/9,300	4000K	65	8.25"	7,500	**12**
36658	**MH250/U**	A	M58/E	250	ED28	12,800/9,300	4200K	65	8.25"	10,000	**12**
36660	**MH250/HOR/T15**	B	M58/E	250	T15	20,000/14,100	4200K	65	8.25"	10,000	**24**
36662	**MH400/U**	D	M59/E	400	ED37	33,000/23,500	4200K	65	11.5"	20,000	**6**
36664	**MH400/U/ED28**	A	M59/E	400	ED28	33,000/23,500	4200K	65	8.25"	20,000	**12**
36666	**MH400/HOR/T15**	C	M59/E	400	T15	33,000/23,500	4200K	65	9.75"	15,000	**12**
36668	**MH1000/U**	F	M47/E	1,000	BT56	110,000/93,500	4200K	65	15.37"	18,000	**6**
36670	**MH1000/U/BT37**	E	M47/E	1,000	BT37	110,000/93,500	4200K	65	11.5"	12,000	**6**

T15 Metal Halide • E39 / Mogul Base

Venture

Item #	Order Code	MFG#	ANSI	Watts	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36722	**MH175W/U/T15**	40335	M57/E	175	14,000/9100	4000K	65	8.31"	10,000	**12**
36726	**MH250W/U/T15**	33479	M58/E	250	21,000/13,700	4000K	65	8.31"	10,000	**12**

HID LAMPS METAL HALIDE - PROTECTED - MOGUL BASE

Metal Halide - Protected • Ex39 / Mogul Base

Sylvania

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	M.O.L.	Life (hrs)	Pk. Qty.
36810	**MP175/BU-ONLY**	A	64773	M57/0	175	BT28	14,400/10,200	4000K	8.25"	10,000	**6**
36812	**MP250/BU-ONLY**	A	64404	M58/0	250	BT28	23,000/17,000	4000K	8.25"	10,000	**6**
36814	**MP400/BU-ONLY**	B	64705	M59/0	400	BT37	40,000/26,000	3600K	11.5"	20,000	**6**
36818	**MP1000/BU-ONLY**	C	64714	M47/0	1,000	BT56	12,800/7800	3500K	15.38"	15,000	**6**

Metal Halide - Protected • Ex39 / Mogul Base

GENERIC

Item #	Order Code	Fig.	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
36840	**MP175/BU**	A	M57/0	175	ED28	14,000/91,00	4200K	65	8.25"	10,000	**12**
36845	**MP250/BU**	A	M58/0	250	ED28	21,800/14,200	4200K	65	8.25"	10,000	**12**
36850	**MP400/BU**	B	M59/0	400	BT37	40,000/26,000	4200K	65	11.5"	20,000	**12**
36855	**MP400/BU/ED28**	A	M59/0	400	ED28	40,000/33,600	4200K	65	8.25"	20,000	**12**

BT28 Metal Halide

BT37 Metal Halide

BT56 Metal Halide

HID LAMPS METAL HALIDE - PULSE START - MOGUL BASE

Metal Halide - Pulse Start • E39 / Mogul Base

Sylvania

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumen Mean	Color Temp.	M.O.L.	Life (hrs)	Pk. Qty.
36992	**M175/PS/U**	A	64319	M152/E, M137/E	175	BT28	14,400V/8,300H	4000K	8.25"	12,000V/9,000H	**6**
36994	**M250/PS/U**	A	64320	M153/E, M138/E	250	BT28	15,400V/14,000H	3800K	8.25"	15,000V 12,000H	**6**
36996	**MS320/PS/BU-HOR**	A	64507	M154/E, M132/E	320	BT28	21,000V/19,700H	4300K	8.25"	20,000V 15,000H	**6**
36998	**M400/PS/U**	B	64321	M155/E	400	BT37	25,500V/22,400H	4000K	11.5"	20,000V 15,000H	**6**
37000	**M400/PS/U/BT28**	A	64188	M155/E	400	BT28	25,500V/22,400H	4000K	8.25"	20,000V 15,000H	**6**
37004	**MS750/PS/BU-HOR/BT37**	B	64787	M149/E	750	BT37	67,000V/56,000H	4000K	11.5"	16,000V 12,000H	**6**
37007	**M1000/PS/U/BT37**	B	64351	M141/E	1000	BT37	96,000V/86,300H	3800K	11.5"	15,000V 9,000H	**6**

Metal Halide - Pulse Start • E39 / Mogul Base

GENERIC

Item #	Order Code	Fig.	ANSI	Watts	Bulb	Lumen Initial/Mean	Color Temp.	M.O.L.	Life (hrs)	Pk. Qty.
37020	**MS175/PS/BU**	C	M152/E, M137/E	175	ED28	19,000/14,000	4200K	8.25"	15,000	**12**
37025	**MS200/PS/BU**	C	M136/E	200	ED28	19,000/13,500	4200K	8.25"	15,000	**12**
37035	**MS250/PS/U**	C	M153/E, M138/E	250	ED28	19,000/14,000	4200K	8.25"	15,000	**12**
37045	**MS400/PS/U**	D	M155E, M135E	400	ED37	39,000/27,000	4200K	11.5"	20,000	**12**
37048	**MS400/PS/U/ED28**	C	M155/E, M135/E	400	ED28	39,000/27,000	4200K	8.25"	20,000	**12**

BT28

BT37

ED28

ED37

HID LAMPS METAL HALIDE BI-PIN / PAR LAMPS

Metal Halide Bi-Pin

Philips

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Base	Bulb	Lumens Initial/Mean	Color Temp.	Color	CRI	M.O.L.	Life (hrs)	Pk. Qty.
37111	**CDM35/TC/830**	A	37372-0	M130/E	39	G8.5	T4	3,300/2,300	3000K	Warm White	81	3.34"	10,000	**12**
37115	**CDM35/T6/830**	B	22328-9	M130/E	39	G12	T6	3,300/2,600	3000K	Warm White	81	3.94"	12,000	**12**
37119	**CDM70/TC/830**	A	37373-8	M139/E	70	G.85	T4	6,400/4,500	3000K	Warm White	83	3.34"	10,000	**12**
37123	**CDM70/T6/830**	B	22337-0	M139/E	70	G12	T6	6,600/4,950	3000K	Warm White	81	3.94"	12,000	**12**
37131	**CDM150/T6/830**	B	23272-8	M142/E	150	G12	T6	14,000/9,800	3000K	Warm White	85	4.34"	12,000	**12**

A

T4 Metal Halide
G8.5 Base

B

T6 Metal Halide
G12 Base

PAR20 Metal Halide • E26 / Medium Base

Philips

Item #	Order Code	MFG#	ANSI	Beam Spread	Watts	Lumens Initial/Mean	Color Temp.	CRI	Life (hrs)	Pk. Qty.
37460	**CDM35/PAR20/M/SP**	23365-0	M130/0	Spot	39	2,000/1,300	3000K	81	9,000	**12**
37464	**CDM35/PAR20/M/FL**	23364-3	M130/0	Flood	39	2,000/1,300	3000K	81	9,000	**12**

PAR20 MH

PAR30 Metal Halide Longneck • E26 / Medium Base

Philips

Item #	Order Code	MFG#	ANSI	Beam Spread	Watts	Lumens Initial/Mean	Color Temp.	CRI	Life (hrs)	Pk. Qty.
37620	**CDM35/PAR30L/M/SP**	22329-7	M130/0	Spot	39	2,200/1,430	3000K	81	9,000	**6**
37624	**CDM35/PAR30L/M/FL**	22330-5	M130/0	Flood	39	2,200/1,430	3000K	81	9,000	**6**
37632	**CDM70/PAR30L/M/SP**	23224-9	M143/M98/0	Spot	70	5,000/3,050	3000K	83	11,000	**6**
37636	**CDM70/PAR30L/M/FL**	23221-5	M143/M98/0	Flood	70	5,000/3,050	3000K	83	11,000	**6**

PAR30 MH

PAR38 Metal Halide • E26 / Medium Base

Sylvania

Item #	Order Code	MFG#	ANSI	Beam Spread	Watts	Lumens Initial	Color Temp.	CRI	Life (hrs)	Pk. Qty.
37831	**MP70PAR/U/SP20/ECO**	64590	M98/0	Spot	70	3,400	3200K	75	8,500	**6**
37835	**MP70PAR/U/FL35/ECO**	64592	M98/0	Flood	70	3,400	3200K	75	8,500	**6**
37839	**MP100PAR/U/SP20/ECO**	64580	M90/0	Spot	100	5,800	3000K	75	8,500	**6**
37843	**MP100PAR/U/FL35/ECO**	64582	M90/0	Flood	100	5,800	3000K	75	8,500	**6**
37851	**MP150PAR/U/FL35/ECO**	64597	M102/0	Flood	150	8,800	3200K	75	8,500	**6**

PAR38 MH

HID LAMPS HIGH PRESSURE SODIUM - MEDIUM BASE

ED17 High Pressure Sodium • E26 / Medium Base

Philips

Item #	Order Code	MFG#	ANSI	Watts	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
38738	**C35S76/M**	30632-4	S76	35	2,250/2,025	2100K	21	5.43″	24,000	**12**
38741	**C50S68/M**	30336-2	S68	50	4,000/3,600	2100K	21	5.43″	24,000	**12**
38744	**C70S62/M**	33192-6	S62	70	6,300/5,850	2100K	21	5.43″	24,000	**12**
38747	**C100S54/M**	34446-5	S54	100	9,500/8,550	2100K	21	5.43″	24,000	**12**
38749	**C150S55/M**	30347-9	S55	150	16,000/14,4000	2100K	21	5.43″	24,000	**12**

E/ED17 HPS

ED17 High Pressure Sodium • E26 / Medium Base

GE

Item #	Order Code	MFG#	ANSI	Watts	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
38771	**LU35/MED/ECO**	11668	S76	35	2,250/2,025	1900K	22	5.43"	16,000	**6**
38773	**LU50/MED/ECO**	11345	S68	50	4,000/3,600	1900K	22	5.43"	24,000	**6**
38775	**LU70/MED/ECO**	11339	S62	70	6,400/5,450	1900K	22	5.43"	24,000	**6**
38777	**LU100/MED/ECO**	13250	S54	100	9,500/8,550	2000K	22	5.5"	24,000	**6**
38779	**LU150/MED/ECO**	13252	S55	150	16,000/14,400	2000K	22	5.75"	24,000	**6**

E/ED17 HPS

ED17 High Pressure Sodium • E26 / Medium Base

GENERIC

Item #	Order Code	ANSI	Watts	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
38841	**LU35/MED**	S76	35	2,200/1,980	2000K	22	5.43"	16,000	**12**
38843	**LU50/MED**	S68	50	3,800/3,420	2000K	22	5.43"	24,000	**12**
38844	**LU70/MED**	S62	70	6,000/5,400	2000K	22	5.43"	24,000	**12**
38845	**LU100/MED**	S54	100	9,000/8,100	2000K	22	5.43"	24,000	**12**
38846	**LU150/MED**	S55	150	15,000/13,500	2000K	22	5.43"	24,000	**12**

E/ED17 HPS

HID LAMPS HIGH PRESSURE SODIUM - MOGUL BASE

High Pressure Sodium • E39 / Mogul Base

Philips

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
38946	**C50S68/ALTO**	A	36867-0	S68	50	ED23.5	4,000/3,600	2100K	21	7.75"	24000	**12**
38948	**C70S62/ALTO**	A	36869-6	S62	70	ED23.5	6,500/5,670	2100K	21	7.75"	24000	**12**
38950	**C100S54/ALTO**	A	36872-0	S54	100	ED23.5	9,400/8,460	2100K	21	7.75"	24000	**12**
38952	**C150S55/ALTO**	A	36874-6	S55	150	ED23.5	15,800/14,220	2100K	21	7.75"	24000	**12**
38954	**C200S66/ALTO**	B	36877-9	S66	200	ED18	21,400/19,260	2100K	21	9.75"	24000	**12**
38956	**C250S50/ALTO**	B	36879-5	S50	250	ED18	27,000/24,300	2100K	21	9.75"	24000	**12**
38958	**C400S51/ALTO**	B	36881-1	S51	400	ED18	50,000/4,5000	2100K	21	9.75"	24000	**12**
38960	**C1000S52/ALTO**	C	36883-7	S52	1000	ED25	140,000/126,000	2100K	21	15.06"	24000	**6**
38962	**C1000S52/ED37**	D	32386-5	S52	1000	ED37	125,000/112,000	2100K	21	11.5"	24000	**6**

High Pressure Sodium • E39 / Mogul Base

GE

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	CRI	M.O.L.	Life (hrs)	Pk. Qty.
38981	**LU50/H/ECO**	A	44975	S68	50	ED23.5	4,000/3,600	1900K	22	7.75"	24,000	**12**
38983	**LU70/H/ECO**	A	85368	S62	70	ED23.5	6,400/5,450	1900K	22	7.75"	24,000	**12**
38985	**LU100/H/ECO**	A	85369	S54	100	ED23.5	9,500/8,550	2000K	22	7.75"	24,000	**12**
38987	**LU150/55/H/ECO**	A	85371	S55	150	ED23.5	16,000/14,400	2000K	22	7.75"	24,000	**12**
38989	**LU200/H/ECO**	B	85372	S66	200	ED18	22,000/19,800	2100K	22	9.75"	24,000	**12**
38991	**LU250/H/ECO**	B	85377	S50	250	ED18	28,000/25,200	2100K	22	9.75"	24,000	**12**
38993	**LU400/H/ECO**	B	85379	S51	400	ED18	51,000/45,000	2100K	22	9.75"	24,000	**12**
38997	**LU1000/ECO**	C	44058	S52	1000	E25	127,000/115,000	2100K	22	15.06"	24,000	**6**

HID LAMPS HPS - MOGUL BASE / LPS - DOUBLE CONTACT BASE

High Pressure Sodium • E39 / Mogul Base

Sylvania

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	M.O.L.	Life (hrs)	Pk. Qty.
39024	**LU200/ECO**	B	67576	S66	200	ET18	22,000/19,800	2100K	9.75"	24,000	**20**
39030	**LU750**	C	67547	S111	750	BT37	105,000/94,500	2100K	11.5"	24,000	**6**
39032	**LU1000**	D	67307	S52	1000	E25	130,000/24,000	2100K	15.06"	24,000	**6**

High Pressure Sodium • E39 / Mogul Base

GENERIC

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	M.O.L.	Life (hrs)	Pk. Qty.
39052	**LU50**	A	-	S68	50	ED23.5	16,000/14,400	2100K	7.75"	24,000	**12**
39054	**LU70**	A	-	S62	70	ED23.5	16,000/14,400	2100K	7.75"	24,000	**12**
39056	**LU150/55**	A	-	S55	150	ED23.5	16,000/14,400	2100K	7.75"	24,000	**12**
39060	**LU250**	B	-	S50	250	ET18	22,000/19,800	2100K	9.75"	24,000	**12**
39062	**LU400**	B	-	S51	400	ET18	22,000/19,800	2100K	9.75"	24,000	**12**
39064	**LU1000**	D	-	S52	1000	E25	130,000/24,000	2100K	15.06"	24,000	**12**

Low Pressure Sodium • Double Contact By22d Base

Philips

Item #	Order Code	Fig.	MFG#	ANSI	Watts	Bulb	Lumens Initial/Mean	Color Temp.	M.O.L.	Life (hrs)	Pk. Qty.
39156	**SOX18**	E	23404-7	L69	18	T17	1800/1620	1700K	8.5"	18,000	**12**
39157	**SOX35**	E	32781-7	L70	35	T17	4550/4095	1700K	12.12"	18,000	**12**
39158	**SOX55**	E	32151-3	L71	55	T17	7800/7800	1700K	16.75"	18,000	**12**
39159	**SOX90**	E	32152-1	L72	90	T21	14300/12155	1700K	20.75"	18,000	**12**
39160	**SOX135**	E	32153-9	L73	135	T21	22600/19210	1700K	30.5"	18,000	**12**
39161	**SOX180**	E	15116-7	L74	180	T21	32000/22400	1700K	44.13"	18,000	**6**

ET23.5 / ED23.5

ET18 / ED18

BT37

ED25 / E25

T17/T21

BALLASTS

CONTENTS

Magnetic Fluorescent 77
T5/T5HO Electronic Fluorescent 78
T8 Electronic Fluorescent 79
T12 Electronic Fluorescent 82
Electronic Fluorescent - Workhorse 83
Magnetic Compact Fluorescent 84
Magnetic Compact Fluorescent Adapters 84
Electronic CF Ballasts / Kits 85
Circline Fluorescent 87
Sign Ballast - Electronic 88
Sign Ballast - Magnetic 88
Neon Transformers 89
HID Metal Halide Kits 90
Pulse Start Metal Halide Kits 92
Electronic Metal Halide Kits 93
High Pressure Ballast Kits 94
HID Fluorescent Can 95
Replacement Capacitors 96
Replacement Ignitors 97

How Ballasts Work

Gas discharge lamps require a ballast to operate. The ballast provides a high initial voltage to initiate the discharge, then rapidly limits the lamp current to safely sustain the discharge.

Lamp manufacturers specify lamp electrical input characteristics required to achieve rated lamp life and lumen output specifications. Ballasts are designed to optimally operate a unique lamp type, however some ballasts will adequately operate more than one type of lamp.

Dimmable Halogen Transformers

LIGHTECH

Item#	Fig.	Order Code	Dimensions	Input	Output	Watts	Pk. Qty.
40120	A	**LET75**	2" x 1.25" x 0.75"	120V/.6A	12V/6.25A	75	**EA**
40125	B	**LET151-12**	1.06" x 1.38" x 3.39"	120V/1.25A	12V/12.5A	150	**EA**
40130	C	**LET303-12**	1 .06" x 1.5" x 5 18"	120V/2.5A	12V/24.8A	300	**EA**

A

B

C

Universal Lighting Technologies ADVANCE ROBERTSON

Preheat Ballasts - Magnetic Fluorescent (Starter Required)

Item#	Fig.	Brand	Order Code	Lamps	Input Volts	Dimensions	Pk. Qty.
40210	A	Universal	**200H2**	(1) F14-15-18-20 T8 or T12	120	3.06" x 1 .78" x 1 31"	**EA**
40255	A	Advance	**LC49C**	(1) F4-6-8 T5	120	3 .06" x 1.38" x 1. 81"	**EA**
40290	B	Robertson	**04827**	(1) F4-6-8 T5	277	1 .63" x 1 .28" x 2 .81"	**EA**

A

B

BALLASTS

Dimensions

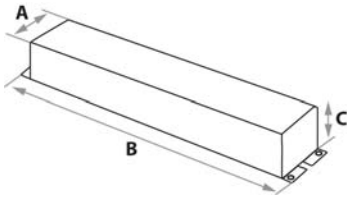

MAGNETIC FLUORESCENT BALLASTS

Universal Lighting Technologies Sylvania ROBERTSON RADIONICS

Item#	Order Code	Brand	Lamps	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
Preheat - Trigger Start (Built in Starter)								
40375	**546BTCP**	Universal	(1) F14-15-18-20 T8 or T12	120	1.88″	6.44″	1.5″	**EA**
40380	**447LRTCP**	Universal	(2) F14-15-18-20 T8 or T12	120	2.38″	6.59″	1.5″	**EA**
40390	**RMB1P13S1**	Advance	(1) F8-13 T5 (Electronic)	120	1.85″	3.54″	0.94″	**10**
40391	**RMB2P13S2**	Advance	(2) F8-13 T5 (Electronic)	120	1.85″	5.00″	0.94″	**10**
40440	**SEN13PSC**	Robertson	(1) 1F8-13 T5	120	1.88″	6.44″	3.03″	**EA**
40445	**SEN213PSC**	Robertson	(2) F8-13 T5	120	1.90″	6.44″	3.03″	**EA**
40450	**D2813**	Radionics	(1/2) F8-13 T5 (Electronic)	120	1.02″	5.9″	1.90″	**EA**
Standard								
40500	**413CTCP**	Universal	(1) F40T12, (1) F40T12ES	120	1.88″	6.44″	1.5″	**10**
40565	**MB2X96**	Sylvania	(2) F72-84-96-96ES T12	120	3.13″	11.75″	1.78″	**6**
40596	**R4S40ATPAC**	Advance	(4) F34-40 T12	120	2.38″	17″	1.5″	**EA**
High Output								
40775	**490XLHTCP**	Universal	(1/2) F48-60-72, (1) F96-F96ES, (2) F24T12HO	120	3.18″	11.75″	2.63″	**6**
40780	**631LHTCP**	Universal	(1) F48-60-64 T12HO, (2) F24-36-48 T12HO	120	3.13″	11.75″	1.78″	**6**
40786	**480SLHTCP**	Universal	(2) F72-84-96-96ES T12HO	120	3.18″	11.75″	2.63″	**6**
40791	**487SLHTCP**	Universal	(2) F72-84-96-96ES T12HO	277	3.18″	11.75″	2.63″	**6**

COMMON DISCONTINUED MAGNETICS

Primary Application	Discontinued Order Code	Replacement Order Code	Item#	Page#
(2) F30T12 120V	573LTCP	**B240R120HP**	41430	82
(1) F40T12 120V	412LSLHTCP	**B134R120MA**	41435	82
(1) F40T12 277V	458LSLHTCP	**B234SR277MA**	41438	82
(2) F40T12 120V	446LSLHTCP	**B234R120MA**	41437	82
(2) F40T12 277V	443LSLHTCP	**B234SR277MA**	41438	82
(1) F96T12ES 120V (60W)	822BRTCP	**B260I120MA**	41442	82
(1) F96T12 120V (60/75W)	822BRTCP	**B260I120RH**	41443	82
(1) F96T12 277V (60/75W)	828BRTCP	**B260IUNVHP**	41444	82
(2) F96T12ES 120V (60W)	806SLHTCP	**B260I120MA**	41442	82
(2) F96T12 120V (60/75W)	806SLHTCP	**B260I120RH**	41443	82
(2) F96T12 277V (60/75W)	827SLHTCP	**B260IUNVHP**	41444	82

BALLASTS T5 / T5 HO ELECTRONIC FLUORESCENT

T5 / T5 HO ELECTRONIC FLUORESCENT

Universal Lighting Technologies ADVANCE

Item#	Order Code	Brand	Lamps	Input Volts	Dimensions			Pk. Qty.
					A	B	C	
40932	**B224PUNVC**	Universal	(1/2) F24 T5 HO	120 - 277	1.18″	14.25″	1.0″	**10**
40934	**B228PUNVC**	Universal	(1/2) F14-21-28-35 T5	120 - 277	1.18″	14.25″	1.0″	**10**
40936	**B239PUNVD**	Universal	(1/2) F39 T5 HO	120 - 277	1.18″	16.88″	1.0″	**10**
40938	**B254PUNVD**	Universal	(1/2) F54 T5 HO	120 - 277	1.18″	16.88″	1.0″	**10**
40940	**B454PUNVE**	Universal	(3/4) F54 T5 HO	120 - 277	1.74″	16.88″	1.18″	**10**
40992	**ICN2S24**	Advance	(1/2) F24 T5HO	120 - 277	1.18″	16.7″	1.0″	**12**
40994	**ICN2S28**	Advance	(1/2) F14-21-28-35 T5	120 - 277	1.18″	16.7″	1.0″	**12**
40996	**ICN2S39**	Advance	(1/2) F39 T5 HO	120 - 277	1.18″	16.7″	1.0″	**12**
40998	**ICN2S54**	Advance	(1/2) F54 T5 HO	120 - 277	1.18″	16.7″	1.0″	**12**
40999	**ICN4S54**	Advance	(3/4) F54 T5 HO	120-277	1.18″	24.0″	1.0″	**12**

BALLASTS T8 FLUORESCENT

Dimensions

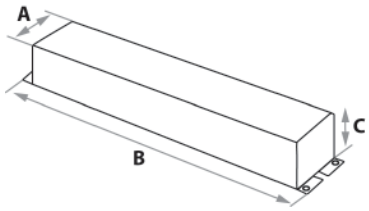

T8 ELECTRONIC FLUORESCENT

Universal Lighting Technologies

Item#	Order Code	Lamps	Input Volts	Dimensions			Pk. Qty.
				A	B	C	
Standard Instant Start							
41118	**B132IUNVHPB**	(1) F17-25-32 T8	120 - 277	1.5″	9.5″	1.0″	**10**
41121	**B232IUNVHPB**	(1/2) F17-25-32 T8	120 - 277	1.5″	9.5″	1.0″	**10**
41124	**B332IUNVHPA**	(2/3) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**10**
41127	**B432IUNVHPA**	(3/4) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**10**
41130	**B259IUNVHPA**	(1/2) F48-60-72-96-96ES T8	120 - 277	1.7″	9.5″	1.18″	**10**
High Output							
41136	**B286I120RH**	(1/2) F48-60-72-96 T8HO	120	3.13″	11.75″	1.78″	**6**
41137	**B286I277RH**	(1/2) F48-60-72-96 T8HO	277	3.13″	11.75″	1.78″	**6**
Programmed Start							
41146	**B232PUNVHPA**	(1/2) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**10**
41147	**B332PUNVHPA**	(2/3) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**10**
41148	**B432PUNVHPA**	(3/4) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**10**
Residential							
41151	**B232I120RESA**	(1/2) F17-25-32 T8	120	1.7″	9.5″	1.18″	**10**
41153	**B432I120RESA**	(3/4) F17-25-32 T8	120	1.7″	9.5″	1.18″	**10**

Standard & Programmed Start Ballasts run equivalent U Bends and energy saving 25,28 and 30 Watt T8's

BALLASTS T8 FLUORESCENT

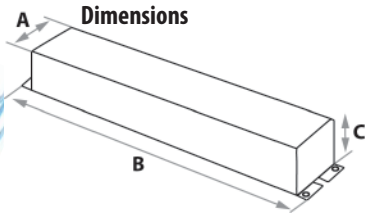

T8 ELECTRONIC FLUORESCENT

Sylvania OSRAM

Item#	Order Code	MFG#	Brand	Lamps	Input Volts	Dimensions			Pk. Qty.
						A	B	C	
Standard Instant Start									
41170	**QTP2X32T8/UNVISN-SC**	49202	Osram	(1/2) F17-25-32 T8	120 - 277	1.68″	9.5″	1.18″	**10**
41171	**QTP3X32T8/UNVISN-SC**	49203	Osram	(2/3) F17-25-32 T8	120 - 277	1.68″	9.5″	1.18″	**10**
41172	**QTP4X32T8/UNVISN-SC**	49204	Osram	(3/4) F17-25-32 T8	120 - 277	1.68″	9.5″	1.18″	**10**
41175	**QTP2X32T8/UNVISN-SC**	49943	Sylvania	(1/2) F17-25-32 T8	120 - 277	1.68″	9.5″	1.18″	**10**
41180	**QTP3X32T8/UNVISN-SC**	49945	Sylvania	(2/3) F17-25-32 T8	120 - 277	1.68″	9.5″	1.18″	**10**
41185	**QTP4X32T8/UNVISN-SC**	49947	Sylvania	(3/4) F17-25-32 T8	120 - 277	1.68″	9.5″	1.18″	**10**
41190	**QTP2X59T8/UNVISN-SC**	49598	Sylvania	(1/2) F48-60-72-96-96ES T8	120 - 277	1.68″	9.5″	1.18″	**10**

T8 ELECTRONIC FLUORESCENT

ADVANCE

Item#	Order Code	Brand	Lamps	Input Volts	Dimensions			Pk. Qty.
					A	B	C	
Standard Instant Start								
41231	**ICN2P32N**	Advance	(1/2) F17-25-32 T8	120 - 277	1.3″	9.5″	1.0″	**20**
41234	**ICN3P32SC**	Advance	(2/3) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**20**
41237	**ICN4P32SC**	Advance	(3/4) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**20**
High Output								
41246	**ICN2S86**	Advance	(1/2) F48-60-72-96 T8 HO	120-277	2.88″	11.75″	1.18″	**6**
Programmed Start								
41256	**IOP2S32SC**	Advance	(1/2) F17-25-32 T8	120-277	1.7″	9.5″	1.18″	**10**
41257	**IOP3S32SC**	Advance	(2/3) F17-25-32 T8	120-277	1.7″	9.5″	1.18″	**10**
41258	**IOP4S32SC**	Advance	(3/4) F17-25-32 T8	120-277	1.7″	9.5″	1.18″	**10**
Residential								
41261	**REB2P32SC**	Advance	(1/2) F17-25-32 T8	120	1.7″	9.5″	1.18″	**20**
41263	**REB4P32SC**	Advance	(3/4) F17-25-32 T8	120	1.7″	9.5″	1.18″	**20**
Dimmable								
41271	**REZ2S32SC**	Advance	(1/2) F17-25-32 T8	120	1.7″	9.5″	1.18″	**20**
41273	**REZ3S32SC**	Advance	(2/3) F17-25-32 T8	120	1.7″	9.5″	1.18″	**20**

BALLASTS T8 FLUORESCENT

Dimensions

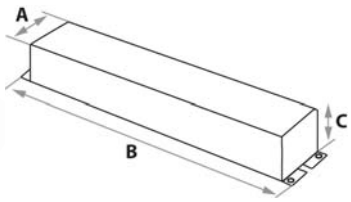

T8 ELECTRONIC FLUORESCENT

GLOBAL BALLASTS GE

Item#	Order Code	MFG#	Brand	Lamps	Input Volts	Dimensions			Pk. Qty.
						A	B	C	
Standard									
41300	**B2F32UNV**	41300	Global	(1/2) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**12**
41305	**B3F32UNV**	41305	Global	(2/3) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**12**
41310	**B4F32UNV**	41310	Global	(3/4) F17-25-32 T8	120 - 277	1.7″	9.5″	1.18″	**12**
41315	**B2F59UNV**	41315	Global	(1/2) F48-72-96-96ES T8	120 - 277	1.7″	9.5″	1.18″	**12**
41336	**GE232MVN**	72275	GE	(1/2) F17-25-32 T8	120 - 277	1.3″	9.5″	1.18″	**10**
41337	**GE332MVN**	74456	GE	(2/3) F17-25-32 T8	120 - 277	1.3″	9.5″	1.18″	**10**
41338	**GE432MVN**	74463	GE	(3/4) F17-25-32 T8	120 - 277	1.3″	9.5″	1.18″	**10**
41339	**GE259MVN**	74469	GE	(1/2) F48-72-96-96ES T8	120 - 277	1.3″	9.5″	1.18″	**10**
High Output									
41340	**GE286HOMVN**	30176	GE	(1/2) F48-60-72-96 T8HO	120 - 277	2.4″	9.5″	1.6″	**10**

BALLASTS T12 FLUORESCENT

Dimensions

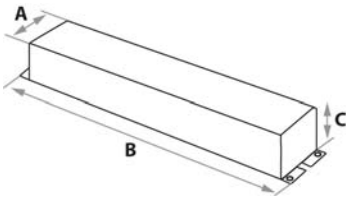

T12 - ELECTRONIC FLUORESCENT

Item#	Order Code	Brand	Lamps	Input Volts	Dimensions			Pk. Qty.
					A	B	C	
Standard								
41430	**B240R120HP**	Universal	(1/2) F30-34-40 T12	120	2.4″	9.5″	1.55″	**10**
41431	**B240R277HP**	Universal	(1/2) F30-34-40 T12	277	2.4″	9.5″	1.55″	**10**
41435	**B134R120MA**	Universal	(1) F34-40 T10 or T12	120	1.7″	9.5″	1.18″	**10**
41437	**B234SR120MA**	Universal	(2) F34-40 T10 or T12	120	1.7″	9.5″	1.18″	**10**
41438	**B234SR277MA**	Universal	(2) F34-40 T10 or T12	277	1.7″	9.5″	1.18″	**10**
41440	**B340R120HP**	Universal	(2/3) F30-34-40 T12	120	2.4″	9.5″	1.55″	**10**
41441	**B340R277HP**	Universal	(2/3) F30-34-40 T12	277	2.4″	9.5″	1.55″	**10**
41442	**B260I120MA**	Universal	(2) F48-72 (1/2) F96ES Only	120	1.7″	9.5″	1.18″	**10**
41443	**B260I120RH**	Universal	(1/2) F48-60-64-72-84-96-96ES T12	120	2.4″	9.5″	1.55″	**10**
41444	**B260IUNVHP**	Universal	(1/2) F48-60-64-72-84-96-96ES T12	120 - 277	2.4″	9.5″	1.55″	**6**
41487	**ICN2S40N**	Advance	(2) F30-34-40 T12	120 - 277	1.3″	9.5″	1.0″	**10**
41490	**RELB2S40SC**	Advance	(2) F34-40 T12	120	1.75″	9.5″	1.18″	**10**
41494	**ICN2P60SC**	Advance	(1/2) F72-84-96-96ES T12	120 - 277	1.7″	9.5″	1.18″	**10**
41505	**B2F34120V**	Global	(2) F34-40 T10 or T12	120	1.7″	9.5″	1.18″	**12**
41511	**KTEB-120-1-TP-EMI**	Keystone	(1) F14-15-20 T8 or T12	120	1.37″	6.46″	1.0″	**10**
41512	**KTEB-220-1-TP-EMI**	Keystone	(2) F14-15-20 T8 or T12	120	1.37″	6.46″	1.0″	**10**
41513	**KTEB-240-1-PC-PIC**	Keystone	(1/2) F30-34-40 T12	120	1.7″	9.5″	1.15″	**10**
41514	**KTEB-240-UV-TP-PIC**	Keystone	(1/2) F30-34-40 T12	120 - 277	1.7″	9.5″	1.15″	**10**
41516	**KTEB-275-UV-TP-PK**	Keystone	(1/2) F48-60-64-72-84-96-96ES T12	120 - 277	2.15″	11.8″	1.61″	**6**
41534	**GE240RSMVN**	GE	(1/2) F20-30-34-10 T12	120 - 277	1.3″	9.5″	1.18″	**10**
41535	**GE340RSMVN**	GE	(2/3) F30-34-40 T12	120-277	2.3″	9.5″	1.5″	**10**
41540	**GE260ISMVN**	GE	(1/2) F48-60-64-72-84-96-96ES T12	120 - 277	1.7″	9.5″	1.18″	**10**
High Output								
41595	**B295SRUNVHP**	Universal	(2) F48-60-72-84-96 T12HO	120 - 277	3.13″	11.75″	1.78″	**10**
41645	**ICN2S110SC**	Advance	(2) F48-60-72-96-96ES T12HO	120 - 277	1.7″	9.5″	1.18″	**10**
41695	**GE296HOMVN**	GE	(2) F48-60-72-84-96 T12HO	120 - 277	2.15″	11.75″	1.61″	**6**

BALLASTS ELECTRONIC MULTI APPLICATION

Dimensions

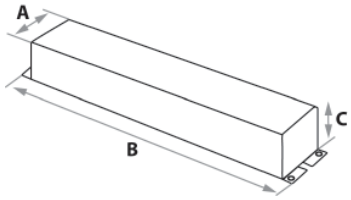

ELECTRONIC FLUORESCENT

Workhorse

Each ballast can be applied to a variety of lamp combinations. Contact your representative for more information and Specific Approved Applications.

Item#	Order Code	Lamps	Max Watts	Input Volts	Dimensions			Pk. Qty.
					A	B	C	
41990	**WH1-120-L**	1-2 Lamps	28	120	1″	6″	0.75″	**EA**
41991	**WH1-277-L**	1-2 Lamps	28	277	1″	7.5″	0.75″	**EA**
41995	**WH2-120-L**	1-2 Lamps	35	120	1″	5.5″	1″	**EA**
41996	**WH2-277-L**	1-2 Lamps	35	277	1″	5.5″	1″	**EA**
42000	**WH3-120-L**	1-2 Lamps	64	120	1.5″	6.5″	1″	**EA**
42001	**WH3-277-L**	1-2 Lamps	64	277	1.5″	6.5″	1″	**EA**
42005	**WH4-120-L**	1-2 Lamps	70	120	1.5″	6.5″	1″	**EA**
42006	**WH4-277-L**	1-2 Lamps	70	277	1.5″	6.5″	1″	**EA**
42010	**WH5-120-L**	1-4 Lamps	128	120	1.72″	8.5″	1″	**EA**
42011	**WH5-277-L**	1-4 Lamps	128	277	1.72″	9.5″	1″	**EA**
42015	**WH6-120-L**	1-4 Lamps	140	120	1.72″	8.5″	1″	**EA**
42016	**WH6-277-L**	1-4 Lamps	140	277	1.72″	8.5″	1″	**EA**
42020	**WH7-120-L**	1-6 Lamps	220	120	1.72″	19.25″	1″	**EA**
42021	**WH7-277-L**	1-6 Lamps	220	277	1.72″	19.25″	1″	**EA**
42025	**WH8-120-L**	1-6 Lamps	220	120	1.72″	19.25″	1″	**EA**
42026	**WH8-277-L**	1-6 Lamps	220	277	1.72″	19.25″	1″	**EA**

BALLASTS MAGNETIC COMPACT FLUORESCENT

MAGNETIC COMPACT FLUORESCENT

ADVANCE ROBERTSON KEYSTONE TECHNOLOGIES, LLC

Item#	Fig.	Order Code	Brand	Lamps	Input Volts	Pk. Qty.
42550	A	**LPL59TP**	Advance	CF 5-7-9 2-Pin	120	**EA**
42555	B	**LC13TP**	Advance	CF 13 2-Pin	120	**EA**
42560	A	**LO1322**	Advance	CF13-22 2-Pin	120	**EA**
42561	A	**VLO13TP**	Advance	CF13-22 2-Pin	277	**EA**
42665	A	**01527P**	Robertson	CF 5-7-9 2-Pin	277	**EA**
42715	A	**CC579TP**	Keystone	CF 5-7-9 2-Pin	120	**EA**
42720	A	**CC1322TP**	Keystone	CF 13-22 2-Pin	120	**EA**

MAGNETIC COMPACT FLUORESCENT ADAPTERS

ENERTRON

Item#	Fig.	Order Code	Brand	Lamps	Mount	Input Volts	Pk. Qty.
42970	C	**3000**	Enertron	CF5 2-Pin	Sidemount	120	**EA**
42973	D	**4000**	Enertron	CF5 2-Pin	Centermount	120	**EA**
42976	E	**3000H**	Enertron	CF5 2-Pin	Hardwire	120	**EA**
42980	C	**3200**	Enertron	CF7 2-Pin	Sidemount	120	**EA**
42983	D	**4200**	Enertron	CF7 2-Pin	Centermount	120	**EA**
42986	E	**3200H**	Enertron	CF7 2-Pin	Hardwire	120	**EA**
42990	D	**4500**	Enertron	CF9 2-Pin	Centermount	120	**EA**
42993	C	**3700**	Enertron	CF13 2-Pin	Sidemount	120	**EA**
42994	D	**4700**	Enertron	CF13 2-Pin	Centermount	120	**EA**
42996	E	**3700H**	Enertron	CF13 2-Pin	Hardwire	120	**EA**
43003	C	**3900**	Enertron	CF22 2-Pin	Sidemount	120	**EA**
43006	E	**3900H**	Enertron	CF22 2-Pin	Hardwire	120	**EA**

BALLASTS ELECTRONIC COMPACT FLUORESCENT

ELECTRONIC COMPACT FLUORESCENT

Universal Lighting Technologies

Item#	Fig.	Order Code	Lamps	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
Ballast								
43112	A	**C213UNVME**	(1/2) CF13 4-Pin	120-277	2.31″	4.94″	1.0″	**20**
43114	A	**C218UNVME**	(1/2) CF18 4-Pin	120-277	2.31″	4.94″	1.0″	**20**
43116	A	**C2642UNVME**	(1/2) CF26 or (1) CF32/CF42 4-Pin	120-277	2.31″	4.94″	1.0″	**20**
43122	A	**C242UNVME**	(1/2) CF32 or CF42 4-Pin	120-277	2.98″	4.94″	1.0″	**20**
Ballast Kit								
43125	B	**C213UNVMEK**	(1/2) CF13 4-Pin	120-277	2.31″	4.94″	1.0″	**20**
43127	B	**C218UNVMEK**	(1/2) CF18 4-Pin	120-277	2.31″	4.94″	1.0″	**20**
43129	B	**C264UNVMEK**	(1/2) CF26 or (1) CF32/CF42 4-Pin	120-277	2.31″	4.94″	1.0″	**20**

Item#	Fig.	Order Code	Lamps	Starting Method	Wiring	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
Long CF (PLL)										
43136	C	**C240SI120RH**	(1/2) FT40W/2G11	Instant Start	Parallel	120	2.40″	9.5″	1.55″	**20**
43137	C	**C240SI277RH**	(1/2) FT40W/2G11	Instant Start	Parallel	277	2.40″	9.5″	1.55″	**20**
43138	C	**C240PUNVHPB**	(1/2) FT40W/2G11	Programmed Start	Series	120 - 277	1.5″	9.5″	1.0″	**20**
43142	C	**C340SI120RH**	(2/3) FT40W/2G11	Instant Start	Parallel	120	2.40″	9.5″	1.55″	**20**
43143	C	**C340SI277RH**	(2/3) FT40W/2G11	Instant Start	Parallel	277	2.40″	9.5″	1.55″	**20**

BALLASTS ELECTRONIC COMPACT FLUORESCENT

Ballast

Ballast Kit

Dimensions

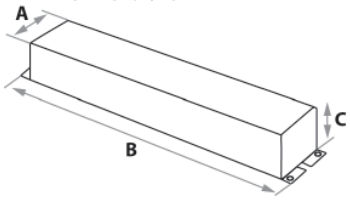

ELECTRONIC COMPACT FLUORESCENT — ADVANCE

Item#	Fig.	Order Code	Brand	Lamps	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
Ballast Only									
43167	A	**ICF2S13H1LD**	Advance	(1/2) CF13 4-Pin	120 - 277	2.4″	4.6″	0.98″	**20**
43169	A	**ICF2S18H1LD**	Advance	(1/2) CF18 4-Pin	120 - 277	2.4″	4.6″	0.98″	**20**
43171	A	**ICF2S26H1LD**	Advance	(1/2) CF26 or (1)CF32/CF42 4-Pin	120 - 277	2.4″	4.6″	0.98″	**20**
43173	A	**ICF2S42M2LD**	Advance	(1/2) CF32 or CF42 4-Pin	120 - 277	3″	4.6″	1.29″	**20**
Ballast Kit									
43177	B	**ICF2S13H1LDK**	Advance	(1/2) CF13 4-Pin	120 - 277	2.4″	4.6″	0.98″	**12**
43179	B	**ICF2S18H1LDK**	Advance	(1/2) CF18 4-Pin	120 - 277	2.4″	4.6″	0.98″	**12**
43181	B	**ICF2S26H1LDK**	Advance	(1/2) CF26 or (1)CF32/CF42 4-Pin	120 - 277	2.4″	4.6″	0.98″	**12**
43183	B	**ICF2S42M2LDK**	Advance	(1/2) CF32 or CF42 4-Pin	120 - 277	3″	4.6″	1.29″	**12**

Long CF (PLL) — GE

Item#	Fig.	Order Code	MFG#	Lamps	Starting Method	Wiring	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
43365	C	**GEC240MAXA**	71435	(1/2) FT40W/2G11	Instant Start	Parallel	120 - 277	1.7″	9.5″	1.18″	**10**
43366	C	**GEC240MVPSA**	71437	(1/2) FT40W/2G11	Programmed Start	Parallel	120 - 277	1.7″	9.5″	1.18″	**10**
43369	C	**GEC340MAXA**	71436	(2/3) FT40W/2G11	Instant Start	Parallel	120 - 277	1.7″	9.5″	1.18″	**10**

BALLASTS CIRCLINE FLUORESCENT

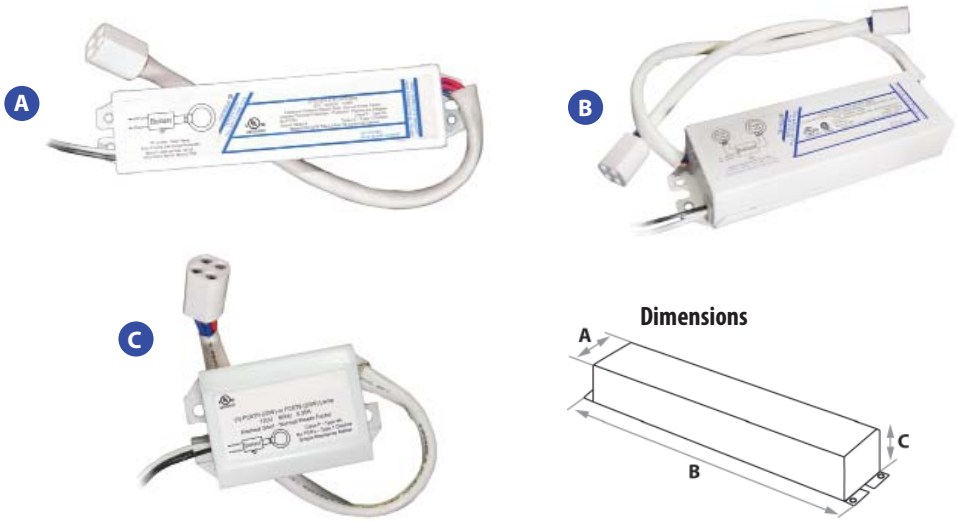

CIRCLINE FLUORESCENT

Item#	Style	Order Code	Brand	Lamps	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
43425	A	547RSWSTCP	Universal	(1) FC6T9, (1) FC8 T9	120	1.44″	6.44″	1.50″	EA
43512	C	SSN2PWS	Robertson	(1) FC6 T9, (1) FC8 T9	120	1.88″	3.25″	1.41″	EA
43514	A	RSW140C120WS	Robertson	(1) FC12T9, (1) FC16T9	120	1.38″	6.47″	1.00″	EA
43518	B	RSW3240C120WS	Robertson	(2) FC8T9, (1) FC8T9 & (1) FC12T9, (1) FC12T9 & (1) FC16T9	120	1.88″	6.47″	1.03″	EA
43520	C	SS2WSTP	Keystone	(1) FC6T9, (1) FC8T9	120	1.89″	3.10″	1.43″	EA
43521	C	KTEB-1022-TP-WS	Keystone	(1) FC8T9	120	1.21″	3.45″	1.43″	EA
43522	A	KTEB-140-1-TP-EMI-WS	Keystone	(1) FC12T9, (1) FC16T9	120	1.37″	6.46″	1.00″	EA
43523	B	KTEB-2C72-1-TP-WS	Keystone	(2) FC8T9, (1) FC8T9 & (1) FC12T9, (1) FC12T9 & (1) FC16T9	120	1.89″	6.46″	1.00″	EA

BALLASTS SIGN - ELECTRONIC / MAGNETIC

A

B

Dimensions

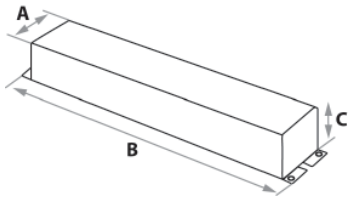

MAGNETIC SIGN BALLASTS

ADVANCE GENERIC

Item#	Fig.	Order Code	Brand	Lamps	Max. Individual Lamp Length	Input Volts	Dimensions A	Dimensions B	Dimensions C	Pk. Qty.
43824	A	**ASB041212**	Advance	4-12 Ft, 1-2 Lamps	10 Ft.	120	3.2″	11.75″	2.63″	**EA**
43826	A	**ASB062024**	Advance	6-20 Ft, 2-4 Lamps	10 Ft.	120	3.2″	11.75″	2.63″	**EA**
43828	A	**ASB122424**	Advance	12-24 Ft, 2-4 Lamps	10 Ft.	120	3.2″	14.31″	2.63″	**EA**
43830	A	**ASB124046**	Advance	12-40 Ft, 4-6 Lamps	10 Ft.	120	3.2″	19.2″	2.69″	**EA**
43832	A	**ASB204024**	Advance	20-40 Ft, 2-4 Lamps	10 Ft.	120	3.2″	19.2″	2.69″	**EA**
43834	A	**ASB244846**	Advance	24-48 Ft, 4-6 Lamps	10 Ft.	120	3.2″	19.2″	2.69″	**EA**
43880	A	**MSB041212**	Generic	4-12 Ft, 1-2 Lamps	10 Ft.	120	3.2″	11.75″	2.63″	**EA**
43882	A	**MSB062024**	Generic	6-20 Ft, 2-4 Lamps	10 Ft.	120	3.2″	11.75″	2.63″	**EA**
43884	A	**MSB122424**	Generic	12-24 Ft, 2-4 Lamps	10 Ft.	120	3.2″	14.31″	2.63″	**EA**
43886	A	**MSB124046**	Generic	12-40 Ft, 4-6 Lamps	10 Ft.	120	3.2″	19.2″	2.69″	**EA**
43888	A	**MSB204024**	Generic	20-40 Ft, 2-4 Lamps	10 Ft.	120	3.2″	19.2″	2.69″	**EA**
43890	A	**MSB244846**	Generic	24-48 Ft, 4-6 Lamps	10 Ft.	120	3.2″	19.2″	2.69″	**EA**

ELECTRONIC SIGN BALLASTS

Universal Lighting Technologies GENERIC

43977	B	**ESB21612**	Universal	2-16 Ft, 1-2 Lamps	8 Ft.	120 - 277	3.13″	11.75″	1.8″	**EA**
43979	B	**ESB43214**	Universal	4-32 Ft, 1-4 Lamps	8 Ft.	120 - 277	3.2″	14.3″	2.7″	**EA**
43981	B	**ESB104014**	Universal	10-40 Ft, 1-4 Lamps	10 Ft.	120 - 277	3.2″	16.7″	2.7″	**EA**
43983	B	**ESB84846**	Universal	8-48 Ft, 4-6 Lamps	8 Ft.	120 - 277	3.2″	16.7″	2.7″	**EA**
44095	B	**ESB021612MV**	Generic	2-16 Ft, 1-2 Lamps	8 Ft.	120 - 277	3.13″	11.75″	1.8″	**EA**
44097	B	**ESB43214MV**	Generic	4-32 Ft, 1-4 Lamps	8 Ft.	120 - 277	3.2″	14.3″	2.7″	**EA**
44099	B	**ESB104014MV**	Generic	10-40 Ft, 1-4 Lamps	10 Ft.	120 - 277	3.2″	16.7″	2.7″	**EA**
44101	B	**ESB084846MV**	Generic	8-48 Ft, 4-6 Lamps	8 Ft.	120 - 277	3.2″	16.7″	2.7″	**EA**

BALLASTS NEON

A

B

C

30 MA 120V NEON TRANSFORMERS

Item#	Fig.	Order Code	Description	Input Volts	Pk. Qty.
44255	A	**NT/7500**	7.5KV 30 MA	120	**EA**
44260	A	**NT/9000**	9KV 30MA	120	**EA**
44265	A	**NT/12000**	12KV 30MA	120	**EA**
44270	A	**NT/15000**	15KV 30MA	120	**EA**
ACCESSORIES					
44275	B	**NT/BOX**	NEON TX BOX	-	**EA**
44280	C	**GTO/WIRE**	GTO15 BLK 250	-	**EA**

BALLASTS METAL HALIDE BALLAST KITS

Kit Includes Ballast, Capacitor, Ignitor (Where Applicable), and Mounting Brackets

Dimensions



HID METAL HALIDE BALLAST KITS

Universal Lighting Technologies

Item#	Order Code	Watts	ANSI	Input Volts	Dimensions				Open Circuit Volts	Input Watts	Pk. Qty.
					A	B	C	D			
45042	**M35MLTLC3M**	35/39	M130	120/208/240/277	3.94″	0.85″	2.81″	2.0″	230	50	**6**
45045	**M50MLTLC3M**	50	M110	120/208/240/277	3.94″	1.05″	2.81″	2.55″	252	67	**6**
45048	**M70MLTLC3M**	70	M98	120/208/240/277	3.94″	1.33″	2.81″	2.88″	250	95	**6**
45049	**M7048TLC3M**	70	M98	480	3.94″	1.38″	2.81″	2.88″	250	100	**6**
45051	**M100MLTLC3M**	100	M90/M92	120/208/240/480	3.94″	1.5″	2.81″	2.8″	260	130	**6**
45052	**M10048TLC3M**	100	M90/M92	480	3.94″	1.7″	2.81″	3.0″	285	132	**6**
45054	**M150MLTLC3M**	150	M102	120/208/240/480	3.94″	2.38″	2.81″	3.88″	245	185	**6**
45055	**M15048TLC3M**	150	M102	480	3.94″	2.3″	2.81″	3.6″	260	185	**6**
45057	**M175MLTAC3M**	175	M57/M107	120/208/240/480	3.94″	2.2″	2.81″	3.6″	305	213	**6**
45059	**M175ML5AC3M**	175	M57/M107	120/208/240/277/480	3.94″	2.3″	2.81″	3.6″	300	208	**6**
45060	**M250MLTAC3M**	250	M58	120/208/240/277	3.94″	3.0″	2.81″	4.3″	315	297	**6**
45062	**M250ML5AC3M**	250	M58	120/208/240/277/480	3.94″	3.0″	2.81″	4.3″	290	280	**6**
45063	**M250MLTAC4M**	250	M58	120/208/240/277	4.75″	1.53″	4.25″	3.53″	310	280	**3**
45065	**M250ML5AC4M**	250	M58	120/208/240/277/480	4.75″	1.82″	4.25″	3.62″	300	282	**3**
45166	**M400MLTAC4M**	400	M59	120/208/240/277	4.75″	2.0″	4.25″	3.9″	299	458	**3**
45167	**M40048TAC4M**	400	M59	480	4.75″	2.0″	4.25″	3.9″	300	458	**3**
45168	**M400ML5AC4M**	400	M59	120/208/240/277/480	4.75″	2.0″	4.25″	3.9″	300	450	**3**
45169	**M1000MLTAC5M**	1,000	M47	120/208/240/277	5.75″	2.9″	4.25″	5.05″	425	1,080	**2**
45170	**M100048TAC5M**	1,000	M47	480	5.75″	2.85″	4.25″	4.80″	410	1,080	**2**
45171	**M1000ML5AC5M**	1,000	M47	120/208/240/277/480	5.75″	2.9″	4.25″	5.05″	420	1,080	**2**
45172	**M1500MLTAC5M**	1,500	M48	120/208/240/277	5.75″	4.4″	4.25″	6.4″	455	1,615	**2**
45173	**M150048TAC5M**	1,500	M48	480	5.75″	4.4″	4.25″	6.4″	445	1,620	**2**

BALLASTS METAL HALIDE BALLAST KITS

Kit Includes Ballast, Capacitor, Ignitor (where applicable) and Mounting Brackets

GLOBAL BALLASTS

METAL HALIDE BALLAST KITS

Item#	Order Code	Watts	ANSI	Input Volts	Pk. Qty.
45360	**BKM70QC**	70	M98	120/208/240/277	**EA**
45362	**BKM100QC**	100	M90	120/208/240/277	**EA**
45364	**BKM150QC**	150	M102	120/208/240/277	**EA**
45366	**BKM175QC**	175	M57	120/208/240/277	**EA**
45368	**BKM250QC**	250	M58	120/208/240/277	**EA**
45370	**BKM400QC**	400	M59	120/208/240/277	**EA**
45372	**BKM1000QC**	1,000	M47	120/208/240/277	**EA**

BALLASTS PULSE START METAL HALIDE BALLAST

Pulse Start Metal Halide Ballast Kit Includes Ballast, Capacitor, Ignitor and Mounting Brackets

Dimensions



PULSE START METAL HALIDE BALLAST KITS

Universal Lighting Technologies

Item#	Order Code	Watts	ANSI	Input Volts	Dimensions				Pk. Qty.
					A	B	C	D	
45653	**P175ML5AC3M**	175	M137/M152	120/208/240/277/480	3.94″	2.6″	2.81″	4.0″	**6**
45655	**P200ML5AC3M**	200	M153/M138	120/208/240/277/480	3.94″	2.7″	2.81″	4.0″	**6**
45665	**P250ML5AC4M**	250	M135/M138	120/208/240/277/480	4.75″	2.0″	4.25″	3.9″	**3**
45668	**P320MLTAC4O**	320	M132/M154	120/208/240/277	4.75″	2.0″	4.25″	3.9″	**3**
45670	**P320ML5AC4M**	320	M132/M154	120/208/240/277/480	4.75″	2.0″	4.25″	3.9″	**3**
45678	**P400ML5AC4M**	400	M155/M135/ M128/M172	120/208/240/277/480	4.75″	2.0″	4.25″	3.9″	**3**
45692	**P750ML5AC5M**	750	M149	120/208/240/277/480	5.75″	2.8″	4.25″	4.9″	**2**
45704	**P1000ML5AC5M**	1,000	M141	120/208/240/277/480	5.75″	2.9″	4.25″	5.1″	**2**

PULSE START METAL HALIDE BALLAST KITS

GLOBAL BALLASTS

Item#	Order Code	Watts	ANSI	Input Volts	Pk. Qty.
46031	**BKPMH175QC**	175	M137/M152	120/208/240/277	**EA**
46034	**BKPMH200QC**	200	M136	120/208/240/277	**EA**
46037	**BKPMH250QC**	250	M138/M153	120/208/240/277	**EA**
46040	**BKPMH320QC**	320	M132/M150	120/208/240/277	**EA**
46043	**BKPMH350QC**	350	M131	120/208/240/277	**EA**
46046	**BKPMH400QC**	400	M135/M155	120/208/240/277	**EA**

BALLASTS ELECTRONIC METAL HALIDE BALLASTS

Dimensions

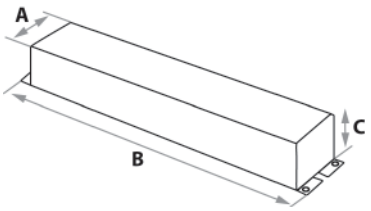

ELECTRONIC METAL HALIDE BALLAST

Sylvania

Item#	Fig.	Order Code	MFG#	Watts	ANSI	Input Volts	Dimensions			Input Watts	Pk. Qty.
							A	B	C		
46385	A	**QTP1X39MH/UNVF**	51910	39	M130	120 - 277	3.4″	5.0″	1.4″	44	**10**
46386	B	**QTP1X39MH/UNVJ**	51911	39	M130	120 - 277	3.4″	4.6″	1.4″	44	**10**
46395	A	**QTP1X70MH/UNVF**	51912	70	M139/M98	120 - 277	3.4″	5.0″	1.4″	79	**10**
46396	B	**QTP1X70MH/UNVJ**	51913	70	M139/M98	120 - 277	3.4″	4.6″	1.4″	79	**10**
46400	A	**QTP1X100MH/UNVF**	51914	100	M90/M140	120 - 277	3.4″	5.0″	1.4″	110	**10**
46401	B	**QTP1X100MH/UNVJ**	51915	100	M90/M140	120 - 277	3.4″	4.6″	1.4″	110	**10**
46405	A	**QTP1X150MH/UNVF**	51930	150	M102/M142	120 - 277	2.6″	7.5″	2.2″	167	**20**

BALLASTS HIGH PRESSURE SODIUM BALLAST KITS

Kit Includes Ballast, Capacitor, Ignitor and Mounting Brackets

Dimensions



HIGH PRESSURE SODIUM BALLAST KITS

Universal Lighting Technologies

Item#	Order Code	Watts	ANSI	Input Volts	Dimensions				Open Circuit Volts	Input Watts	Pk. Qty.
					A	B	C	D			
46882	**S50MLTC3M**	50	S68	120/208/240/277	3.94″	1.3″	2.81″	2.7″	130	66	**6**
46885	**S70MLTLC3M**	70	S62	120/208/240/277	3.94″	1.3″	2.81″	2.8″	120	98	**6**
46886	**S100MLTC3M**	100	S54	120/208/240/277	3.94″	2.0″	2.81″	3.4″	120	122	**6**
46887	**S10048TLC3M**	100	S54	480	3.94″	2.0″	2.81″	3.3″	120	135	**6**
46891	**S150MLTLC3M**	150	S55	120/208/240/277	3.94″	2.5″	2.81″	3.9″	120	188	**6**
46892	**S15048TLC3M**	150	S55	480	3.94″	3.0″	2.81″	4.5″	120	189	**6**
46894	**S200MLTAC4M**	200	S66	120/208/240/277	4.75″	1.2″	4.25″	3.0″	175	230	**3**
46895	**S20048TAC4M**	200	S66	480	4.75″	2.0″	4.25″	3.8″	172	240	**3**
46899	**S250ML5AC4M**	250	S50	120/208/240/277/480	4.75″	2.0″	4.25″	3.8″	200	300	**3**
46902	**S400ML5AC4M**	400	S51	120/208/240/277/480	4.75″	2.44″	4.25″	4.3″	190	465	**3**
46912	**S1000ML5AC5M**	1,000	S52	120/208/240/277/480	4.75″	3.7″	4.25″	5.6″	440	1,048	**2**

HIGH PRESSURE SODIUM BALLAST KITS

GLOBAL BALLASTS

Item#	Order Code	Watts	ANSI	Input Volts	Pk. Qty.
47196	**BKH35R120C**	35	S76	120	**EA**
47197	**BKH50R120C**	50	S68	120	**EA**
47198	**BKH70R120C**	70	S62	120	**EA**
47199	**BKH100R120C**	100	S54	120	**EA**
47200	**BKH150R120C**	150	S55	120	**EA**
47207	**BKH70QC**	70	S62	120/208/240/277	**EA**
47209	**BKH100QC**	100	S54	120/208/240/277	**EA**
47211	**BKH150QC**	150	S55	120/208/240/277	**EA**
47213	**BKH250QC**	250	S50	120/208/240/277	**EA**
47215	**BKH400QC**	400	S51	120/208/240/277	**EA**
47217	**BKH1000QC**	1,000	S52	120/208/240/277	**EA**

BALLASTS HID FLUORESCENT CAN BALLASTS

Dimensions

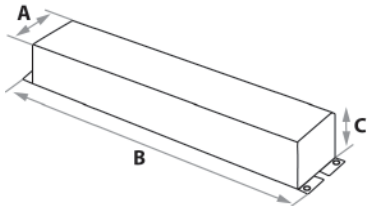

HID FLUORESCENT CAN (F-CAN)

Universal Lighting Technologies

Item#	Order Code	MFG#	Watts	ANSI	Input Volts	Dimensions			Pk. Qty.
						A	B	C	
Metal Halide F-Can									
47705	**MH35/FCAN**	1120-251A-TC	35/39	M130	120/277	3.19″	9.5″	2.63″	**EA**
47710	**MH50/FCAN**	11210-236C-TC	50	M110	120/277	3.19″	11.75″	2.63″	**EA**
47715	**MH70/FCAN**	11210-506C-TC	70	M98	120/277	3.19″	11.75″	2.63″	**EA**
47720	**MH100/FCAN**	11210-239C-TC	100	M90	120/277	3.19″	11.75″	2.63″	**EA**
47725	**MH150/FCAN**	11210-539C-TC	150	M102	120/277	3.19″	14.31″	2.63″	**EA**
47730	**MH175/FCAN**	1110-245SC-TC	175	M57	120/277	3.25″	14.25″	2.63″	**EA**
47735	**MH250/FCAN**	1110-246C-TC	250	M58	120/277	3.25″	16.75″	2.63″	**EA**
47740	**MH400/FCAN**	1110-247S-CTC	400	M59	120/277	3.25″	19.25″	2.63″	**EA**
High Pressure Sodium F-Can									
47975	**HPS70/FCAN**	12210-237C-TC	70	S62	120/277	3.19″	11.75″	2.63″	**EA**
47980	**HPS100/FCAN**	12210-239C-TC	100	S54	120/277	3.19″	11.75″	2.63″	**EA**
47985	**HPS150/FCAN**	12210-241C-TC	150	S55	120/277	3.25″	14.25″	2.63″	**EA**

BALLASTS REPLACEMENT CAPACITORS

REPLACEMENT CAPACITORS

Item#	Order Code	Lamps	Dimensions H	W	D	Microfarad (µ) / Volts	Pk. Qty.
Metal Halide Oil Filled Capacitor							
49110	**CAP/MH100**	100W MH	3.1″	2.16″	1.31″	12µF / 300V	**EA**
49120	**CAP/MH175**	175W MH	2.7″	2.69″	1.56″	10µF / 400V	**EA**
49130	**CAP/MH250**	250W MH	2.7″	2.91″	1.91″	15µF / 400V	**EA**
49140	**CAP/MH400**	400W MH	3.1″	2.91″	1.91″	24µF / 400V	**EA**
49150	**CAP/MH1000**	1000W MH	3.9″	2.91″	1.91″	24µF / 480V	**EA**
49160	**CAP/MH1500**	1500W MH	3.9″	3.66″	1.97″	32µF / 525V	**EA**
Metal Halide Dry Film Capacitor With Leads							
49210	**CAP/MH50/DRY**	50W MH	2.76″	1.18″ Dia.		6µF / 280V	**EA**
49220	**CAP/MH70/DRY**	70W MH	2.76″	1.58″ Dia.		8µF / 330V	**EA**
49230	**CAP/MH100/DRY**	100W MH	2.76″	1.58″ Dia.		12µF / 300V	**EA**
49235	**CAP/MH150/DRY**	150W MH	2.75″	1.58″ Dia.		16µF / 330V	**EA**
49240	**CAP/MH175/DRY**	175W MH	3.74″	1.58″ Dia.		10µF / 400V	**EA**
49250	**CAP/MH250/DRY**	250W MH	3.74″	1.58″ Dia.		15µF / 400V	**EA**
49255	**CAP/MH320/DRY**	320W MH	3.74″	1.77″ Dia.		20µF / 400V	**EA**
49260	**CAP/MH400/DRY**	400W MH	4.61″	1.77″ Dia.		24µF / 400V	**EA**
High Pressure Sodium Oil Filled Capacitor							
49310	**CAP/HPS250**	250W HPS	3.1″	2.91″	1.91″	35µF / 330V	**EA**
49320	**CAP/HPS400**	400W HPS	3.9″	2.91″	1.91″	48µF / 300V	**EA**
49330	**CAP/HPS400/55**	400W HPS	3.5″	2.91″	1.91″	55µF / 240V	**EA**
49340	**CAP/HPS1000**	1000W HPS	4.3″	2.91″	1.91″	26µF / 525V	**EA**

Oil Filled Capacitor

Dry Film Capacitor

MH = Metal Halide • HPS = High Pressure Sodium

BALLASTS REPLACEMENT IGNITORS

REPLACEMENT IGNITORS

GLOBAL BALLASTS

Item#	Order Code	Watts	Dimensions		Pk. Qty.
			H	Dia.	
Metal Halide Ignitor / Starter					
49510	**IGN/MH50-150**	50/70/100/150	2.5″	1.5″	**EA**
49515	**IGN/MH175**	175	2.5″	1.5″	**EA**
49520	**IGN/MH200-450**	200/250/400/450	2.5″	1.5″	**EA**
49530	**IGN/MH750**	750	2.5″	1.5″	**EA**
49560	**IGN/MH1000**	1,000	3″	1.5″	**EA**
High Pressure Sodium Ignitor / Starter					
49610	**IGN/HPS35-150**	35/50/70/100/150	2.5″	1.5″	**EA**
49620	**IGN/HPS200-400**	200/250/400	2.5″	1.5″	**EA**
49630	**IGN/HPS1000**	1,000	3″	2.13″	**EA**

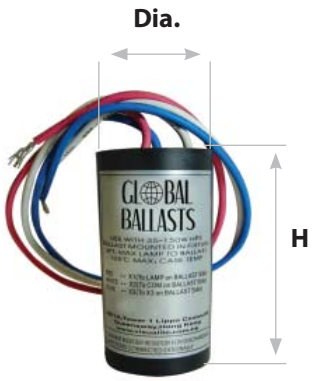

SOCKETS

CONTENTS

FLUORESCENT	
Miniature Bi-Pin	98
Starter Bases	99
Medium Bi-Pin	99
Slimline Single-Pin	102
Hight Output/Very High Output	102
High Output Sign	103
Circline	104
Compact Fluorescent	104
Long Twin Tube	105

INCANDESCENT & H.I.D.	
Mini-Can, Candelabra	106
Medium Base	107
Mogul Base	108
Double Contact	109
Prong Base	109
Pin	110
Turn/Lock	111
Double Ended	111
Reducers/Extenders	112

MINIATURE BI-PIN

USA SOCKET

T5 Miniature Bi-Pin | Bracket & Leads

Item# 50017
Order Code SKMBP/BKT/L

- G5 Mini Bi-Pin Base
- Bracket Mount with 6/32 Hole
- 75W-250V

T5 Miniature Bi-Pin | Long Bracket & Leads

Item# 50018
Order Code SKMBP/LBKT/L

- G5 Mini Bi-Pin Base
- Bracket Mount with 6/32 Hole
- 75W-250V

T5 Miniature Bi-Pin | Flanged Mount with Leads

Item# 50019
Order Code SKMBP/FLANGE/L

- G5 Mini Bi-Pin Base
- Mounting Flange with Leads
- 75W-250V

T5 Miniature Bi-Pin | Rotary Lock | Back Snap In

Item# 50025
Order Code SKMBP/RLOCK/BSNAP

- G5 Mini Bi-Pin Base
- Back Snap In Mount
- 75W-600V
- Unshunted

T5 Miniature Bi-Pin | Rotary Lock | with Nib

Item# 50020
Order Code SKMBP/RLOCK/N

- G5 Mini Bi-Pin Base
- Unshunted
- Wing Snap In or Slide On
- 75W-600V

T5 Miniature Bi-Pin | Rotary Lock | Tall with Nib

Item# 50021
Order Code SKNBP/RLOCK/TALL/N

- G5 Mini Bi-Pin Base
- Unshunted
- Wing Snap In or Slide On
- 75W-600V

T8 to T5 Conversion | Rigid | Unshunted

Item# 50040
Order Code SKMBP/T8>T5/RIGID

- G5 Mini Bi-Pin Base
- Retrofits T8's to T5's
- Unshunted w/Slide On Mounting
- 75W - 600V

T8 to T5 Conversion | Spring | Unshunted

Item# 50041
Order Code SKMBP/T8>T5/SPRING

- G5 Mini Bi-Pin Base
- Retrofits T8's to T5's
- Unshunted w/Slide On Mounting
- 75W - 600V

SOCKETS

FLUORESCENT STARTER BASES

USA SOCKET

Starter Base Socket Holder | Screw Mount

Item# 50057
Order Code SKSB/SCREW

- Screw Mount
- Quickwire Terminal Connection
- Mounting 1" C. to C.

Starter Base Socket Holder | Flange Mount

Item# 50058
Order Code SKSB/FLANGE

- Flange Bracket with 1/8" holes
- Quickwire Terminal Connection
- Mounting 1-1/2" C. to C.

Starter Base Socket Holder | Recessed Clip Mount

Item# 50059
Order Code SKSB/R-CLIP

- Snap In Bracket
- Quickwire Terminal Connection
- Mounts into 1-3/8" Opening

Starter Base Socket Holder | Recessed Flange Mount

Item# 50060
Order Code SKSB/R-FLANGE

- Long Bracket with holes tapped #6-32
- Quickwire Terminal Connection
- Mounting 1-5/8" C. to C.

Starter Base Socket Holder | Snap In

Item# 50061
Order Code SKSB/SNAP

- Snap In Mount
- 660W–250V

Medium Bi-Pin Socket with Starter Base

Item# 50070
Order Code SKSB/BI-PIN

- Medium Bi-Pin
- Screw On Mount

MEDIUM BI-PIN

T10/T12 Medium Bi-Pin

Item# 50087
Order Code SKBP

- G13 Medium Bi-Pin
- Unshunted
- Slide On Mount
- 660W-600V

T10/T12 Medium Bi-Pin | Tall

Item# 50088
Order Code SKBP/TALL

- G13 Medium Bi-Pin
- Tall, Unshunted
- Slide On Mount
- 660W-600V

SOCKETS

MEDIUM BI-PIN Cont.

USA SOCKET

T8 Medium Bi-Pin | Shunted

Item# 50089
Order Code SKBP/SHUNT

- G13 Medium Bi-Pin
- Shunted
- Slide On Mount
- 660W-600V

T8 Medium Bi-Pin | Tall | Shunted

Item# 50090
Order Code SKBP/TALL/SHUNT

- G13 Medium Bi-Pin
- Tall, Shunted
- Slide On Mount
- 660W-600V

Medium Bi-Pin | Butt-On

Item# 50095
Order Code SKBP/BUTT-ON

- G13 Medium Bi-Pin
- Unshunted
- Back Screw Mount
- 660W-600V

Medium Bi-Pin Tombstone | Rigid

Item# 50107
Order Code SKBP/SLIDE/RIGID

- G13 Medium Bi-Pin
- Unshunted
- Slide On or Snap In Mount
- 660W-600V

Medium Bi-Pin Tombstone | Spring

Item# 50108
Order Code SKBP/SLIDE/SPRING

- G13 Medium Bi-Pin
- Unshunted
- Slide On or Snap In Mount
- 660W-600V

Medium Bi-Pin | Open - U-Bent

Item# 50207
Order Code SKBP/O-UBENT

- G13 Medium Bi-Pin
- Unshunted
- Slide On Mount
- 660W-600V

T8 Medium Bi-Pin | Open - U-Bent | Shunted

Item# 50208
Order Code SKBP/O-UBENT/SHUNT

- G13 Medium Bi-Pin
- Shunted
- Slide On Mount
- 660W-600V

Medium Base Bi-Pin | Snap In Rigid

Item# 50210
Order Code SKBP/SNAP-IN/RIGID

- G13 Medium Bi-Pin
- Unshunted
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Snap In Spring

Item# 50211
Order Code SKBP/SNAP-IN/SPRING

- G13 Medium Bi-Pin
- Unshunted
- Snap In Mount
- 660W-600V

SOCKETS

MEDIUM BI-PIN Cont.

USA SOCKET

T8 Medium Bi-Pin | Rotary Lock with Nib

Item# 50213
Order Code SKBP/RLOCK/SHUNT/N

- G13 Medium Bi-Pin
- Shunted
- Snap In Mount with Nib
- 660W-600V

T8 Medium Bi-Pin | Rotary Lock with Nib

Item# 50214
Order Code SKBP/RLOCK/N

- G13 Medium Bi-Pin
- Unshunted
- Snap In Mount with Nib
- 660W-600V

T8 Medium Bi-Pin | Rotary Lock

Item# 50215
Order Code SKBP/RLOCK/SHUNT

- G13 Medium Bi-Pin
- Shunted
- Snap In Mount
- 660W-600V

T8 Medium Bi-Pin | Rotary Lock

Item# 50216
Order Code SKBP/RLOCK

- G13 Medium Bi-Pin
- Unshunted
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Rotary Lock | Tall with Nib

Item# 50217
Order Code SKBP/RLOCK/TALL/SH/N

- G13 Medium Bi-Pin
- Internally Shunted with Nib
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Rotary Lock | Tall with Nib

Item# 50218
Order Code SKBP/RLOCK/TALL/N

- G13 Medium Bi-Pin
- Unshunted
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Rotary Lock | Tall

Item# 50219
Order Code SKBP/RLOCK/TALL/SH

- G13 Medium Bi-Pin
- Shunted, Rotary Lock
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Rotary Lock | Tall

Item# 50220
Order Code SKBP/RLOCK/TALL

- G13 Medium Bi-Pin
- Unshunted, Rotary Lock
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Snap In

Item# 50230
Order Code SKBP/SHUNT/SNAPIN

- G13 Medium Bi-Pin
- Shunted
- Snap In Mount
- 660W-600V

Medium Bi-Pin | Snap In

Item# 50231
Order Code SKBP/SNAPIN

- G13 Medium Bi-Pin
- Unshunted
- Snap In Mount
- 660W-600V

SOCKETS

SLIMLINE SINGLE PIN

USA SOCKET

Slimline Single Pin | Rigid

Item# 50267
Order Code SKSL/SLIDE/RIGID

- Fa8 Single Pin
- Slide On Mount
- 660W-600V

Slimline Single Pin | Spring

Item# 50268
Order Code SKSL/SLIDE/SPRING

- Fa8 Single Pin
- Slide On Mount
- 660W-600V

Slimline Single Pin | Screw On Rigid

Item# 50272
Order Code SKSL/SCREW/RIGID

- Fa8 Single Pin
- Screw On Mount
- 660W-600V

Slimline Single Pin | Screw On Spring

Item# 50273
Order Code SKSL/SCREW/SPRING

- Fa8 Single Pin
- Slide On - Screw On Mount
- 660W-600V

Slimline Single Pin | Snap In Rigid

Item# 50278
Order Code SKSL/SNAP-IN/RIGID

- Fa8 Single Pin
- Snap In Mount
- 660W-600V

Slimline Single Pin | Snap In Spring

Item# 50279
Order Code SKSL/SNAP-IN/SPRING

- Fa8 Single Pin
- Snap In Mount
- 660W-600V

HIGH OUTPUT | VERY HIGH OUTPUT SOCKETS

HO/VHO Slide On | Vertical Rigid

Item# 50308
Order Code SKHO/V-SLIDE/RIGID

- R17d RDC HO/VHO
- Slide On Mount
- Vertical End Only
- 660W-600V

HO/VHO Slide On | Vertical Spring

Item# 50309
Order Code SKHO/V-SLIDE/SPRING

- R17d RDC HO/VHO
- Slide On Mount
- Vertical End Only
- 660W-600V

SOCKETS

HIGH OUTPUT | VERY HIGHT OUTPUT SOCKETS Cont.

USA SOCKET

HO/VHO Slide On | Horizontal Rigid

Item# 50310
Order Code SKHO/H-SLIDE/RIGID

- R17d RDC HO/VHO
- Slide On Mount
- Horizontal End Only
- 660W-600V

HO/VHO Screw On | Horizontal Spring

Item# 50311
Order Code SKHO/H-SLIDE/SPRING

- R17d RDC HO/VHO
- Slide On Mount
- Horizontal End Only
- 660W-600V

HO/VHO Snap In | Horizontal Rigid

Item# 50322
Order Code SKHO/SNAP-IN/RIGID

- R17d RDC HO/VHO
- Snap In Mount
- 660W-600V

Snap-In Mount | Spring

Item# 50323
Order Code SKHO/SNAP-IN/SPRING

- R17d RDC HO/VHO
- Snap In Mount
- 660W-600V

HIGH OUTPUT SIGN SOCKETS

HO Round Sign Socket | Rigid

Item# 50341
Order Code SKHO/ROUND/RIGID

- R17d RDC HO/VHO
- Snap In Mount
- 660W - 1,000V

HO Round Sign Socket | Spring

Item# 50342
Order Code SKHO/ROUND/SPRING

- R17d RDC HO/VHO
- Snap In Mount with Spring
- 660W - 1,000V

HO D Sign Socket | Rigid

Item# 50343
Order Code SKHO/D/VER/RIGID

- R17d RDC HO/VHO
- Snap In D-Socket Mount
- Vertical End Only
- 660W - 1,000V

HO D Sign Socket | Spring

Item# 50344
Order Code SKHO/D/VER/SPRING

- R17d RDC HO/VHO
- Snap In D-Socket Mount
- Vertical End Only
- 660W - 1,000V

SOCKETS



CIRCLINE

USA SOCKET

Circline Socket

Item# 50347
Order Code SKFC

- Circline Fluorescent
- Circle Connector–Quickwire
- 660W-600V
- Accepts 18AWG Leads

Circline Socket with Leads

Item# 50348
Order Code SKFC/L

- Circline Fluorescent
- Circle Connector–Quickwire
- 660W-600V
- 18AWG Leads

COMPACT FLUORESCENT

CF 5-7-9 | 2-Pin Horizontal

Item# 50369
Order Code SKCF2P/5-7-9/H

- G23 and G23-2, 2-Pin Base
- Horizontal Screw On Mount
- 75W-600V

CF 5-7-9 | 2-Pin Vertical

Item# 50370
Order Code SKCF2P/5-7-9/V

- G23 and G23-2, 2-Pin Base
- Vertical Screw On Mount
- 75W-600V

CF13 | 2-Pin Horizontal

Item# 50412
Order Code SKCF2P/13H

- GX23, 2-Pin Base
- Horizontal Screw On Mount
- 75W-600V

CF13 | 2-Pin Vertical

Item# 50413
Order Code SKCF2P/13V

- GX23, 2-Pin Base
- Vertical Screw On Mount
- 75W-600V

CF13 | 2-Pin Horizontal Snap In

Item# 50414
Order Code SKCF2P/13/HSNAP

- GX23, 2-Pin Base
- Horizontal Snap In Mount
- 75W-600V

CF13 | 2-Pin Vertical

Item# 50415
Order Code SKCF2P/13/VSNAP

- GX23, 2-Pin Base
- Base Screw On Mount
- 75W - 600V

CF18-26 | 2-Pin | Vertical

Item# 50520
Order Code SKFC2P/18-26/V

- T4 Quad 2-Pin Base
- Vertical Screw On Mount
- 75W - 600V

CF13-18-26-32-42 | 4-Pin | Vertical

Item# 50820
Order Code SKCF4P/13-42/V

- T4 Quad Triple Tube 4-Pin Base
- Vertical Screw On Mount
- 75W - 600V

SOCKETS

COMPACT FLUORESCENT Cont.

USA SOCKET

Socket Holder | Screw In

Item# 50835
Order Code SKCF/MNT/HOR-SCREW

- Screw On Mount
- For Use with Items 50520 and 50820

Socket Holder | Snap In

Item# 50836
Order Code SKCF/MNT/HOR-SNAP

- Snap In Mount
- For Use with Items 50520 and 50820

CF13-18-26-32-42 | 4-Pin | Threaded

Item# 50830
Order Code SKCF4P/13-42/RT

- T4 Quad Triple Tube 4-Pin Base
- Thread, Screw On, or Snap In Mount
  Snap In Mount
- 75W - 600V

LONG TWIN TUBE SOCKETS & CLIPS

Long PL Socket | 4-Pin | Horizontal Screw On

Item# 50928
Order Code SKPLL/H-SCREW

- 2G11 4-Pin Base
- Two Hole Mount
- 75W - 600V

Long PL Socket | 4-Pin | Horizontal Snap In

Item# 50930
Order Code SKPLL/H-SNAP

- 2G11 4-Pin Base
- Horizontal Snap In or
  Two Hole Mount
- 75W - 600V

Long PL Socket | 4-Pin | Horizontal Slide On

Item# 50932
Order Code SKPLL/H-SLIDE

- 2G11 4-Pin Base
- Slide on or Rear Horizontal
  Screw Mount
- 75W - 600V

Long PL Socket | 4-Pin | Vertical Snap In

Item# 50935
Order Code SKPLL/V-SNAP

- 2G11 4-Pin Base
- Vertical Snap In Or
  Two Hole Mount
- 75W - 600V

SOCKETS

LONG TWIN TUBE SOCKETS & CLIPS

USA SOCKET

Long PL Clip | Horizontal Snap In

Item# 50940
Order Code SKPLL/H-CLIP

- CF Twin T5 Lamp Retainer
- Horizontal Snap In Mount

Long PL Clip | Horizontal 2 Piece Snap In

Item# 50941
Order Code SKPLL/H-CLIP/2PC

- CF Twin T5 Lamp Retainer
- Horizontal Snap In Mount
- Adjustable Height

Long PL Metal Clip | Horizontal

Item# 50942
Order Code SKPLL/HM-CLIP

- CF Twin T5 Lamp Retainer
- Horizontal Mount

Long PL Metal Clip | Vertical Snap In

Item# 50945
Order Code SKPLL/V-CLIP

- CF Twin T5 Lamp Retainer
- Vertical Snap In Mount

Horizontal Internal Clip

Item# 50943
Order Code SKPLL/HIM-CLIP

- CF Twin T5 Lamp Retainer

MINI-CAN SOCKETS | CANDELABRA BASE

Mini Candelabra | Flange Mount With Leads

Item# 50999
Order Code SKMC/S-FLANGE/L

- Mini Can Halogen, E11 Base
- Screw On Mount
- 1,000W–250V

Candelabra

Item# 51034
Order Code SKCAN/PIN

- E12 Base
- Pressure Fit
- 75W - 125V

SOCKETS

MEDIUM BASE SOCKETS

USA SOCKET

4KV Medium Base Socket with Leads

Item# 51121
Order Code SKMED/4KV/L

- E26 Medium Base
- Leads
- 4KV Pulse Rated 660W - 600V

4KV Medium Base Socket with Leads & Studs

Item# 51122
Order Code SKMED/4KV/LS

- E26 Medium Base
- Threaded Studs with Leads
- 4KV Pulse Rated 660W - 600V

Medium Base | Snap In

Item# 51123
Order Code SKMED/SNAP-IN/L

- E26 Medium Base
- Snap In with Leads
- 660W- 250V

4 KV Medium Base Socket | Snap In

Item# 51124
Order Code SKMED/SNAP-IN/4KV/L

- E26 Medium Base
- Snap In with Leads
- 4KV Pulse Rated 660W - 250V

Harness Setup | Snap In

Item# 51125
Order Code SKMED/SNAP-IN/AD

- E26 Medium Base
- Screw In
- 600W - 250V

Top Screw Socket | Bakelite

Item# 51127
Order Code SKMED/TOP-SCR/BL

- E26 Medium Base
- Two Hole Mount
- 600W - 200V

Top Screw Porcelain Socket

Item# 51128
Order Code SKMED/TOP-SCR/PC

- E26 Medium Base
- Two hole mount
- 600W - 200V

2 Piece Sign Socket With Leads

Item# 51129
Order Code SKMED/SIGN/2/L

- E26 Medium Base
- 2 Piece Screw Shell with Leads
- 660W - 250V

Porcelain Medium Base Socket

Item# 51130
Order Code SKMED/R-FLANGE/PC

- E26/Medium Base
- Two Hole Mount
- Recessed Flange
- 660W-600V

SOCKETS

MEDIUM BASE SOCKETS Cont.

USA SOCKET

Porcelain Sockets

Item# 51135
Order Code SKMED/KEYLESS

Item# 51136
Order Code SKMED/PULLCHAIN

- E26 Medium Base
- With or without Pull Chain

Wire Guard

Item# 51137
Order Code SKMED/WG

- Protects Lamps From Breakage
- For Use With Keyless And Pull Chain Sockets

Porcelain Medium Base Socket w/Metal 1/8 IP Cap

Item# 51200
Order Code SKMED/CAP-1/8IP

- E26/Medium Base
- 660W-250V
- 1/8 IP Cap

Porcelain Medium Socket w/Metal 1/4 IP Cap

Item# 51201
Order Code SKMED/CAP-1/41P

- E26/Medium Base
- 660W-250V
- 1/4 IP Cap

MOGUL BASE

Mogul Base Socket with Leads | 5KV

Item# 51242
Order Code SKMOG/5KV/L

- E39/Mogul Base
- 5KV
- 1,500W - 600V

Mogul Base Socket with Leads & Studs | 5KV

Item# 51243
Order Code SKMOG/5KV/LS

- E39/Mogul Base
- 5KV
- 1,500W-600V

Mogul Base Socket | Open Rated Socket

Item# 51244
Order Code SKMOG/OPEN/PINK

- E39/Mogul Base
- 1,500W - 600V

Position Oriented Mogul Base

Item# 51245
Order Code SKMOG/POMB/YEL

- E39/Mogul Base
- 1,500W - 600V

Mogul Base Socket | Terminal Screw

Item# 51250
Order Code SKMOG/4KV/TS

- E39/Mogul Base
- 1,500W - 600V

Mogul Base Socket with Metal Cap

Item# 51272
Order Code SKMOG/CAP-3/8IP

Item# 51270
Order Code SKMOG/CAP-1/4IP

- 3/8 IP or 1/4 IP

SOCKETS

DOUBLE CONTACT SOCKETS

USA SOCKET

DC Bayonet Base | Flange Mount

Item# 51337
Order Code SKDC/S-FLANGE/L

- BA15d/Bayonet Base
- Flange Mount
- 150W-125V

DC Bayonet Base | IP with Leads

Item# 51338
Order Code SKDC/IP/L

- BA15d/Bayonet Base
- IP Thread with Leads
- 150W-125V

DC Bayonet Base | Bracket with Leads

Item# 51339
Order Code SKDC/BKT/L

- BA15d/Bayonet Base
- Bracket with Leads
- 150W-125V

HID Low Pressure Sodium Socket with Leads

Item# 51356
Order Code SKLPS/L

- Bay22D Base
- Two Hole Mount
- 660W-1,000V

PRONG BASE SOCKETS

Incandescent Side Prong

Item# 51420
Order Code SKPNG/MED-SIDE/L

- G12.7 Side Prong Base
- Leads
- 660W - 125V

Incandescent Mogul End Prong

Item# 51425
Order Code SKPNG/MOG-END/L

- GX16d End Prong
- Leads
- 1,000W - 125V

5KV HID | Mogul End Prong

Item# 51440
Order Code SKPNG/MOG-END/5KV/L

- GX16d End Prong
- Leads
- 5KV 1,500W - 600V

SOCKETS



PIN SOCKETS

USA SOCKET

Porcelain Halogen Socket | G4

Item# 51447
Order Code SKWEDGE/PC/L

- G4 Wedge Base
- 1,000W–250V

Halogen Socket with Flange | GX5.3

Item# 51486
Order Code SKMR16/R-FLANGE/L

- GX5.3 Bi-Pin Base
- 2 Hole Mount
- 750W–250V

Porcelain Halogen Socket | GX5.3

Item# 51487
Order Code SKMR16/RECTANGLE/L

- GX5.3 Bi-Pin Base
- 75W–250V

Round Analog Halogen Socket | GX5.3/GY6.35

Item# 51488
Order Code SKMR16/HEAT-DISK/L

- GX5.3 Bi-Pin Base
- 75W-125V

Halogen 2-Hole Mount Socket | GX5.3/GY6.35

Item# 51489
Order Code SKMR16/TSHAPE/L

- G5.3, GX5.3 Bi-Pin Base
- Two hole mount
- 100W - 24V

Porcelain Halogen Socket | GX5.3/GY6.35 /G4

Item# 51516
Order Code SKMR16/ROUND/MB

- G4-GX5.3-GY6.35 Bi-Pin Base
- 75W–125V

Porcelain Halogen Socket | GX5.3/GY6.35 /G4

Item# 51517
Order Code SKMR16/R-CLIP/MB/L

- G4-GX5.3-GY6.35 Bi-Pin Base
- Retaining Clip
- 75W–125V

Porcelain Halogen Socket | G8

Item# 51556
Order Code SKG8/ROUND

- G8 Bi-Pin Base
- Leads

Porcelain H.I.D. Socket | G8.5

Item# 51582
Order Code SKG8.5/5KV/L

- HID
- 5KV
- G8.5 Base

Porcelain Halogen Socket | G9

Item# 51601
Order Code SKG9

- Halogen
- 200W - 250V
- G9 Base

SOCKETS



PIN SOCKETS

USA SOCKET

PG12 Base HID Socket with Leads

Item# 51632
Order Code SKPG12/5KV/L

- PG12 Base
- Two Hole Mount
- 5KV 660W - 600V

G12 Base Porcelain HID Socket with Leads

Item# 51642
Order Code SKG12/5KV/L

- G12 Base
- 600W–1,000V

HALOGEN TURN/LOCK SOCKETS

GU7 Base Halogen Socket with Leads

Item# 51692
Order Code SKGU7/ROUND/L

- GU7 Base
- Turn and Lock
- 50V - 10A

GU10 Base Halogen Socket with Leads

Item# 51717
Order Code SKGU10/ROUND/L

- GU10 Base
- Turn and Lock
- 250V

GU10 Base Socket with IP and Leads

Item# 51718
Order Code SKGU10/ROUND/IP/L

- GU10 Base
- Turn and Lock
- 250V

DOUBLE ENDED SOCKETS

Double Ended | R7s, RX7s | 78mm

Item# 51842
Order Code SKDE/78MM/L

- R7s, RX7s Base
- 500W

Double Ended | R7s, RX7s | 118mm

Item# 51843
Order Code SKDE/118MM/L

- RX7s, R7s Base
- Bracket Mount - Center Hole Tapped

SOCKETS

DOUBLE ENDED SOCKETS Cont.

USA SOCKET

RX7s Base Socket with Leads

Item# 51844
Order Code SKDE/PC/L

- RX7s Base
- Screw Mount

R7s Base Halogen Socket Set with Leads

Item# 51847
Order Code SKDE/RECESS/PC/L

- R7s Base
- 500W–250V

R7s Base Porcelain Halogen Socket with Leads

Item# 51848
Order Code SKDE/IP/L

- R7s Base
- 1,000W–250V
- IP Thread/Nut

R7s Base Recessed Flange Socket w. Leads

Item# 51852
Order Code SKDE/R-SPRING/L

- R7s Base
- Two Hole Mount

R7s Base Surface Flange with Leads

Item# 51854
Order Code SKDE/S-SPRING/L

- R7s Base
- Two Hole Mount

SOCKET REDUCERS/EXTENDERS

Mogul to Medium Reducer

Item# 59106
Order Code SKRED/MOG>MED

- Reduces E39/Mogul Base to E26/Medium Base

Medium to Candelabra Reducer

Item# 51911
Order Code SKRED/MED>CAN

- Reduces E26/Medium Base to E12/Candelabra Base
- 75W-250V

SOCKETS

SOCKET REDUCERS/CONVERTERS

USA SOCKET

Medium To Intermediate Reducer

Item# 51912
Order Code SKRED/MED>INT

- Reduces E26/Medium Base to E17/Intermediate Base
- 75W-250V

Medium To Double Contact Bayonet Reducer

Item# 51913
Order Code SKRED/MED>DC

- Reduces E26/Medium Base to Ba15d/Bayonet Base
- 660W – 250V

Medium To French Reducer

Item# 51914
Order Code SKRED/MED>E14

- Reduces E26/Medium Base to French Base
- 75W-250V

Medium to GU10/GZ10 Reducer

Item# 51915
Order Code SKRED/MED>GU10

- Reduces E26/Medium Base to GU10/GZ10 Base
- 660W - 250V

Medium to GU24 Reducer

Item# 51916
Order Code SKRED/MED>GU24

- Reduces E26/Medium Base to Gu24 Base
- 660W-250V

Medium Base Polarized Socket Outlet Adapter

Item# 51917
Order Code SKRED/PLUG>MED

- 660W-125V

Phenolic Outlet Adapter | Screw-In

Item# 51918
Order Code SKRED/MED>OUTLET

- E26/Medium to Outlet Adapter
- 660W-125V

Phenolic Flanged Adapter | Screw-In

Item# 51919
Order Code SKRED/MED>2WIRE

- E26/Medium to Two-Wire
- 660W - 250V

Intermediate to Candelabra Reducer

Item# 51925
Order Code SKRED/INT>CAN

- Reduces E17/Intermediate Base to E12/Candelabra Base

French to Candelabra Reducer

Item# 51926
Order Code SKRED/E14>CAN

- Reduces French Base to E12/Candelabra Base

SOCKETS

SOCKET EXTENDERS

USA SOCKET

Candelabra to Intermediate Extender

Item# 51946
Order Code SKEXT/CAN<INT

- Extends E12/Candelabra Base to E17/Intermediate Base

Candelabra to Medium Extender

Item# 51947
Order Code SKEXT/CAN<MED

- Extends E12/Candelabra Base to E26/ Medium Base

French to Intermediate Extender

Item# 51951
Order Code SKEXT/E14<INT

- Extends French Base to E17/Intermediate Base

Medium to Medium Bake Lite Extender

Item# 51955
Order Code SKEXT/MED-MED/BL

- Extends E26/Medium Base to E26/Medium Base

Medium to Medium Porcelain Extender

Item# 51956
Order Code SKEXT/MED-MED/PC

- Extends E26/Medium Base to E26/Medium Base
- 660W - 250V

Medium to Mogul Extender

Item# 51957
Order Code SKEXT/MED<MOG/BL

- Extends E26/Medium Base to E39/Mogul Base
- 660W-250V

Single to Twin Lampholder

Item# 51958
Order Code SKEXT/MED<MEDY

- 660W Max. Total-250V

HID 4KV Porcelain Mogul Lamp Extender

Item# 51970
Order Code SKEXT/MOG-MOG/PC

- Extends E39/Mogul Base to E39/Mogul Base
- 1500W - 600V

FIXTURES

CONTENTS

RetroFit Kits 116
LED Exit Lights 116
Exit / Emergency Combination 117
Weatherproof Exit / Emergency 117
Lay-In / Indirect 118
Fluorescent Parabolic Troffer 119
Fluorescent High Bay 119
Industrial - Channel - Fluorescent 120
Wrap Around 121
Under Cabinet Fluorescent 121
Under Cabinet Xenon 122
Compact Fluorescent Recessed Can 122
Retro Can - Canopy Lighting 123
Sign Light 124
Vapor Proof 124
Wall Packs 125
Flood Lights 129
Vandal Resistant 135
Garage Lighter 136
Fluorescent Low Bay 136
Build-A-Bay 137
Area Lights 138
Rope Lights 141

TWO-HEAD EMERGENCY FIXTURES

SAFECO Emergency
SafecoEmergency.com

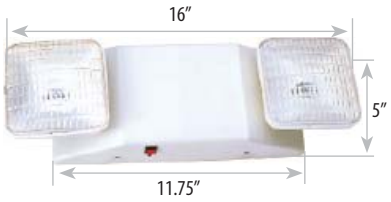

Item# 53010
Order Code EM10

Item# 53011
Order Code EM10B

- Flame-Rated, UV-Stable Thermoplastic Housing
- Acrylic Lens
- Maintenance-Free Lead-Calcium Battery
- Black or White Housing
- 120/277V Operation
- UL listed for damp location

Item# 53015
Order Code EM20

Item# 53016
Order Code EM20B

- Ultra-bright MR 16 halogen lamps
- Two 5.4W lamp heads
- Maintenance-Free Lead Calcium Battery
- Fully automatic operation
- Black or White Housing
- 120/277V Operation
- UL listed for damp location

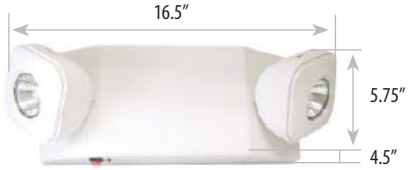

Item# 53020
Order Code EM25

Item# 53021
Order Code EM25B

- Utilizes MR-16 halogen lamps
- 6V, sealed lead acid, maintenance-free battery
- Fully automatic operation
- Black or White Housing
- 120/277V Operation
- UL listed for damp location



Item# 53025
Order Code EM30

Item# 53026
Order Code EM30B

- Completely self-contained
- Fully automatic operation
- Black or White Housing
- 120/277V Operation
- UL listed for damp location

FIXTURES

RETROFIT KITS *LED*

Screw-In Units

Item# 53095
Order Code: EXIT/LED/RETRO

Hardwire Units

Item# 53096
Order Code: EXIT/LED/RETRO/HW

SAFECO Emergency
SafecoEmergency.com

Screw-In Features
- For 120V Applications
- 2.8 watts per kit
- Socket adapters supplied (for signs with bayonet, intermediate or candelabra bases)

Hardwire Kits
- For 120V or 277V Applications
- 2.8 watts per kit
- Kits come complete with mounting bracket and double-face tape

LED EXIT LIGHTS

Item#	Order Code	Fig.	Face Color	Letter Color
53100	**EXIT/LED/W/R/BU**	A	White	Red
53101	**EXIT/LED/W/G/BU**	B	White	Green
53102	**EXIT/LED/B/R/BU**	C	Black	Red
53103	**EXIT/LED/B/G/BU**	D	Black	Green

- UV Stable Thermoplastic Housing
- Single or Double Faced
- Long Life, Energy Saving LED Lamps
- Universal Mounting
- Maintenance-Free Lead Calcium Battery
- 120/277V operation
- UL listed for damp location



LED EDGE - LIT EXIT LIGHTS

Item# 53115
Order Code: EXIT/LED/EL/CR/BU

- Edge-Lit Single Face
- 120/277 V Operation

Item# 53120
Order Code: EXIT/LED/REL/CR/BU

- Recessed Edge-Lit Single Face
- 120/277 V Operation

FIXTURES

EXIT COMBINATION EMERGENCY *EXCO SERIES*

SAFECO Emergency
SafecoEmergency.com

Item#	Order Code	Fig.	Face Color	Letter Color
53250	**EXCO/LED/W/R**	A	White	Red
53251	**EXCO/LED/W/G**	B	White	Green
53252	**EXCO/LED/B/R**	C	Black	Red
53253	**EXCO/LED/B/G**	D	Black	Green

- Long Life, Energy Saving LED Lamps
- UV Stable Thermoplastic Housing
- Maintenance-Free Lead Calcium Battery
- 120V/277V Operation

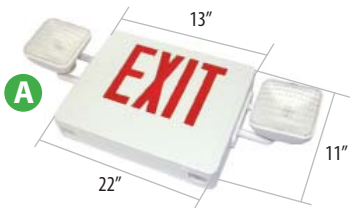

WEATHERPROOF EXIT/EMERGENCY FIXTURES WEATHER PROOF

Item# 53270
Order Code EM40WP

- Ultra bright MR 16 halogen lamps
- High-impact resistant
- Completely self-contained
- Maintenance-Free Lead Calcium Battery
- 120V/277V operation
- UL listed for wet location

Item# 53275
Order Code EXIT/LED/W/R/BU/WP

- 6″ EXIT letters
- Fully gasketed, corrosion-resistant housing
- Energy efficient LED technology
- 120V/277V operation
- UL listed for wet location

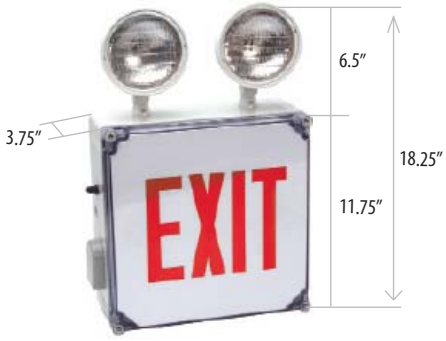

Item# 53280
Order Code EXCO/LED/W/R/WP

- LED Exit/Incandescent Emergency Combo
- Fully gasketed, corrosion-resistant housing
- Energy efficient LED technology
- 120V/277V operation
- UL listed for wet location

FIXTURES FLUORESCENT LAY-INS

LAY-IN TROFFER *LI SERIES*

Item#	Order Code	Dimensions	# of Lamps	Type	Volts
53850	**LI22/2FB32T8/UNV**	2 x 2	2	FB32T8/U6	120 - 277
53910	**LI24/2F32T8/UNV**	2 x 4	2	F32T8	120 - 277
53920	**LI24/3F32T8/UNV**	2 x 4	3	F32T8	120 - 277
53930	**LI24/4F32T8/UNV**	2 x 4	4	F32T8	120 - 277
ACCESSORIES					
53990	**WHIP**	Fixture Whip			

FEATURES

- Housing Formed of Cold Rolled Steel
- T8 or T5 Lamp Options (Order Lamps Separately)
- Highly Reflective White Enamel Finish
- Clear Acrylic Prismatic Lens
- Minimum 87% Reflectivity

Other Wattages and Lamp Types are Available.

RECESSED DIRECT INDIRECT *IT SERIES*

FEATURES

- Heavy-gauge cold rolled steel
- White perforated metal basket with white opal acrylic diffuser inlay
- 2 or 3 T8 or T5 lamps (Order Lamps Separately)
- Low gloss, high reflectivity powder coat finish
- Standard troffer mounting for easy installation in T-bar ceilings

Other Wattages and Lamp Types are Available.

Item#	Order Code	Dimensions	# of Lamps	Type	Volts
54005	**IT22/2F17T8/UNV**	2 x 2	2	F17T8	120-277
54010	**IT22/2F14T5/UNV**	2 x 2	2	F14T5	120-277
54015	**IT22/2F24T5HO/UNV**	2 x 2	2	F21T5HO	120-277
54020	**IT24/2F32T8/UNV**	2 x 4	2	F32T8	120-277
54025	**IT24/3F32T8/UNV**	2 x 4	3	F32T8	120-277
54030	**IT24/2F28T5/UNV**	2 x 4	2	F28T5	120-277
54035	**IT24/3F28T5/UNV**	2 x 4	3	F28T5	120-277

FIXTURES PARABOLIC / HIGH BAY

PARABOLIC TROFFER *PT SERIES*

FEATURES
- Highly Reflective White Enamel Finish
- T8 or T5 Lamp Options (Order Lamps Separately)
- Minimum 87% Reflectivity
- 2 x 2 or 2 x 4 Configurations
- 9 or 18 Cell Silver Parabolic Louvers
- Optimal Glare Control

Other Wattages and Lamp Types are Available.

Item#	Order Code	Dimensions	# of Lamps	Type	Volts	Cells
54070	**PT22/2FB32T8/UNV**	2 x 2	2	FB32T8/U6	120 - 277	9
54140	**PT24/3F32T8/UNV**	2 x 4	3	F32T8	120 - 277	18

FLUORESCENT HIGH BAY *FHB SERIES*

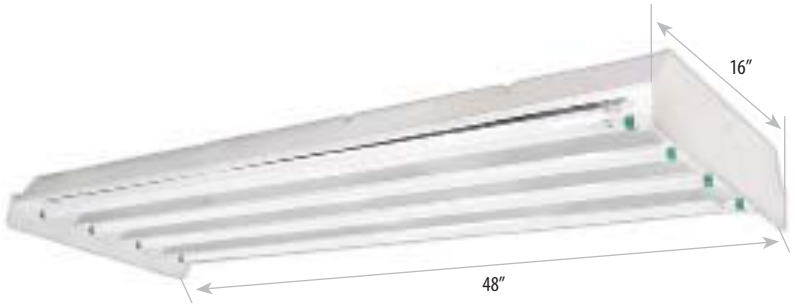

FEATURES
- Heavy Gauge Metal Housing
- T8 or T5 Lamp Options (Order Lamps Separately)
- Highly Efficient Fixture
- Excellent Visual Acuity

Applications:
- Warehouse
- Industrial
- Gymnasium
- Convention Centers

Other Wattages and Lamp Types are Available.

Item#	Order Code	# of Lamps	Type	Reflector Material	Volts
55590	**FHB/4F54T5/UNV/EA**	4	F54T5 HO	Enhanced Aluminum	120 - 277
55630	**FHB/6F32T8/UNV/EA**	6	F32T8	Enhanced Aluminum	120 - 277
55710	**FHB/6F54T5/UNV/EA**	6	F54T5 HO	Enhanced Aluminum	120 - 277
ACCESSORIES					
55880	**FHB/WIREGUARD**		Wire Guard		
55885	**FHB/LENS**		Lens		

FIXTURES INDUSTRIAL - CHANNEL

INDUSTRIAL FLUORESCENT *IN SERIES*



Item#	Order Code	# of Lamps	Type	Volts	Length
56010	**IN2F32T8/UNV**	2	F32T8	120 - 277	48″
56110	**IN2F32T8/UNV/T***	4	F32T8	120 - 277	96″
56120	**IN2F96T8/UNV**	2	F96T8	120 - 277	96″
56130	**IN2F96T12/120**	2	F96T12	120	96″

***T=Tandem**

FEATURES

- Heavy Gauge Cold Rolled Steel
- Baked White Enamel Finish
- Available in 48″, 72″ and 96″ Lengths
- Available in 1 or 2 Lamp Configurations
- Designed for Surface, Stem or Hang Mounting
- Order Lamps Separately

Other Wattages and Lamp Types are Available.

CHANNEL FLUORESCENT *CH SERIES*



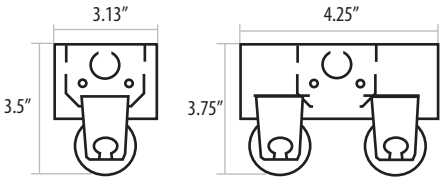

Item#	Order Code	# of Lamps	Type	Volts	Length
56185	**CH1F32T8/UNV**	1	F32T8	120 - 277	48″
56190	**CH2F32T8/UNV**	2	F32T8	120 - 277	48″
56200	**CH2F40T12/120**	2	F40T12	120	48″
56340	**CH2F32T8/UNV/T***	4	F32T8	120 - 277	96″
56345	**CH2F96T8/UNV**	2	F96T8	120 - 277	96″
56365	**CH2F96T12/120**	2	F96T12	120	96″

***T=Tandem**

FEATURES

- Heavy Gauge Cold Rolled Steel
- Baked White Enamel Finish
- Available in 24″, 36″, 48″, 72″ and 96″ Lengths
- Designed for Surface, Stem or Hang Mounting
- Order Lamps Separately

Other Wattages and Lamp Types are Available.

FIXTURES WRAP AROUND / UNDER CABINET

WRAP AROUND *WA SERIES*

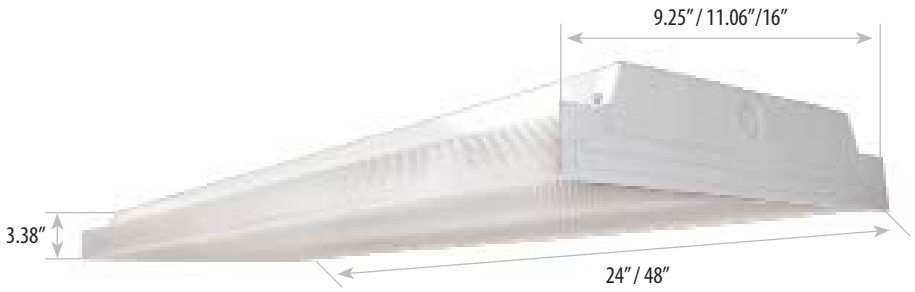

Item#	Order Code	# of Lamps	Type	Width	Volts
56610	**WA2F17T8/UNV**	2	F17T8	11.06"	120 - 277
56655	**WAN2F32T8/UNV**	2	F32T8	9.25"	120 - 277
56660	**WA2F32T8/UNV**	2	F32T8	11.06"	120 - 277
56670	**WA4F32T8/UNV**	4	F32T8	16"	120 - 277
REPLACEMENT LENSES	Dimensions:	**A**	**B**	**C**	
56690	**WAN/LENS**	8.88"	1.5"	8.38"	
56691	**WA2/LENS**	11"	1.75"	10.5"	
56692	**WA4/LENS**	15.63"	1.75"	15.13"	

MEMPHIS FLUORESCENT

FEATURES

- Housing Formed of Cold Rolled Steel
- Highly Reflective White Enamel Finish
- Prismatic Lens
- Minimum 87% Reflectivity
- Available in 2', 4' & 8' Lengths
- Order Lamps Separately

Other Wattages and Lamp Types are Available.

LENS DIMENSIONS:

STARBRITE PLASTICS

UNDER CABINET FLUORESCENT *UCF SERIES*

Item#	Order Code	# of Lamps	Type	Length	Width	Depth
57505	**UCF/12"/1F8T5**	1	1F8T5	12.2"	5"	1.22"
57510	**UCF/21"/1F13T5**	1	1F13T5	21.2"	5"	1.22"
57515	**UCF/25"/2F8T5**	2	2F8T5	24.5"	5"	1.22"
57520	**UCF/34"/1F8-F13T5**	2	1F8T5/1F13T5	33.5"	5"	1.22"
57525	**UCF/43"/2F13T5**	2	2F13T5	42.4"	5"	1.22"

FEATURES

- Heavy Gauge Cold Rolled Steel
- Durable White Baked Enamel
- White Acrylic Diffuser
- Ideal For Under Counter Mounting
- Cool White Lamp Included

APPLICATIONS

- Under Cabinet Task Light
- Work Stations
- Over Cabinet Accent Light
- Laboratories
- Display Cases and Exhibits
- Merchandising
- Indirect Accent Light
- Wall Units and Bars

FIXTURES UNDER CABINET / RECESSED CAN

UNDERCABINET XENON *UCX SERIES*

Item#	Order Code	# of Lamps	Length	Width	Depth
57755	**UCX/9″/1x18W**	1	9″	3.5″	1.26″
57760	**UCX/18″/2x18W**	2	18″	3.5″	1.26″
57765	**UCX/26″/3x18W**	3	26″	3.5″	1.26″
57770	**UCX/37″/4x18W**	4	37″	3.5″	1.26″

FEATURES
- Burns Cooler Than Halogen
- Four Times the Bulb Life of Halogen
- Lamp Included

APPLICATIONS
- Under Cabinet Task Light
- Work Stations
- Over Cabinet Accent Light
- Laboratories
- Display Cases and Exhibits
- Merchandising
- Indirect Accent Light
- Wall Units and Bars

COMPACT FLUORESCENT RECESSED CAN *RC SERIES*

Item#	Order Code	Type	Size	Volts
62005	**RCNF6/1CF42/UNV**	1CF26-32-42TT	6″	120-277
62010	**RCNF8/2CF42/UNV**	2CF32-42TT	8″	120-277
62100	**RCT/AB6V**	Alzac Baffle Trim	6″	-
62105	**RCT/AB8H**	Alzac Baffle Trim	8″	-

Order Lamps Separately

Other Wattages and Lamp Types are Available.

MEMPHIS FLUORESCENT

OTHER RC SERIES AVAILABLE:

FEATURES
- Remodel or New Construction
- Variety of Bulbs
- IC/AT Ratings Available in Some Units
- Variety of Trim Selections

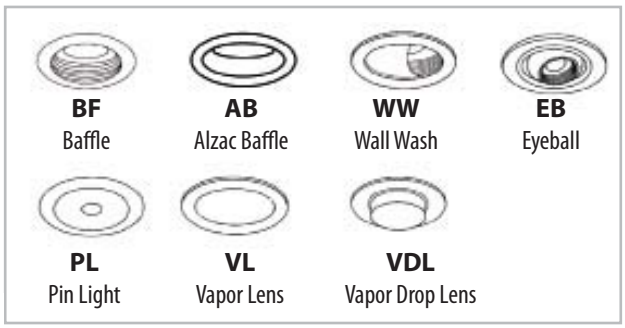

FIXTURES RETRO-CAN

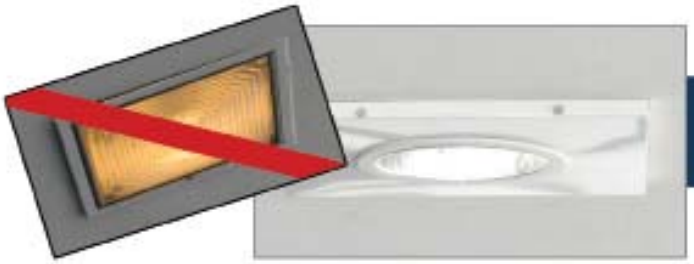

Retro-Can

Canopy Lighting & Energy Upgrade without Stucco Repair

Replace Your Ugly & Inefficient Fixtures With The Bright & New Energy Saving Retro-Can!

WHICH DO I USE? Select Your Replacement

Item#	Order Code	Description	Replaces (Current Bulb)	Volts	Dimensions
62455	**RCCF15**	15W Compact Fluorescent	60W Incandescent	120	14 x 14
62460	**RCCF26**	26W Compact Fluorescent	120W Incandescent	120-277	16 x 16
62465	**RCCF42**	42W Compact Fluorescent	100W HID	120-277	16 x 16
62470	**RCCF84**	2x42W Compact Fluorescent	175W HID	120-277	16 x 16
62475	**RCM100PAR38**	100W PAR38 Metal Halide	250W HID	120-277	16 x 16

Other Wattages and Lamp Types are Available.

ASK ABOUT LED OPTIONS

EASY & LOW COST INSTALLATION In About A Half Hour With No Stucco Repair!

1 Remove Old Fixture

2 Remove Lens/Trim

3 Remove Housing - Cut Larger Hole If Necessary

4 Connect Electric and Insert Retro-Can Housing

5 Attach with Screws or Molly Bolts

6 Screw On Retro-Can Trim and Insert Can

AMERICA LIGHT

FIXTURES SIGN LIGHTERS / VAPOR PROOF

SIGN LIGHTS *SL SERIES*

FEATURES
- Highly Reflective White Enamel Finish
- Clear Lens
- Minimum 87% Reflectivity
- Available in 4 ft & 8 ft Lengths
- Takes One or Two Lamps for 4 ft section



Item#	Order Code	# of Lamps	Type	Volts	Length
64910	**SL4/1F54T5/UNV**	1	F54T5 HO	120 - 277	4 Ft.
64915	**SL4/2F54T5/UNV**	2	F54T5 HO	120 - 277	4 Ft.
64960	**SL8/1F54T5/UNV/T***	2	F54T5 HO	120 - 277	8 Ft.
64965	**SL8/2F54T5/UNV/T***	4	F54T5 HO	120 - 277	8 Ft.

***T=Tandem**

VAPOR PROOF *VP SERIES*

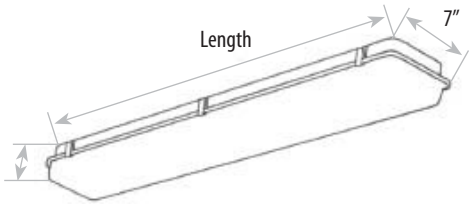

FEATURES
- Fiberglass Housing
- Acrylic Lens
- Neoprene Gasketing
- Internal Metal Work Included
- Available in 2 ft, 4 ft & 8 ft Lengths

Item#	Order Code	# of Lamps	Type	Volts	Length
65005	**VP48/HOUSING**		Housing Only		
65010	**VP2F40T12/120V**	2	F40T12	120	4 Ft.
65020	**VP2F32T8/UNV**	2	F32T8	120 - 277	4 Ft.
65505	**VP96/HOUSING**		Housing Only		
65510	**VP2F32T8/UNV/T***	4	F32T8	120 - 277	8 Ft.
65520	**VP2F96T8/UNV**	2	F96T8	120 - 277	8 Ft.
65530	**VP2F96T12/120V**	2	F96T12	120	8 Ft.
65550	**VP2F96T12HO/UNV**	2	F96T12HO	120 - 277	8 Ft.
ACCESSORIES					
65050	**VP/CLIP**		Plastic Clip		
65051	**VP/CLIP/SS**		Stainless Steel Clip		

***T=Tandem**

COMMON REPLACEMENT LENSES

Dimensions	Shallow -2.5″ Item#	Deep - 3″ Item#
4 Feet		
7.38″ x 49.75″	65060	65061
7.25″ x 51.75″	65065	65066
6.38″ x 49.75″	65070	65071
6.5″ x 50.75″	65075	65076
8 Feet		
7.38″ x 97.75″	-	65605
7.38″ x 101.75″	-	65610
6.5″ x 97.75″	-	65615

FIXTURES WALL PACKS

SMALL POLYCARBONATE WALL PACK *WP10 SERIES*

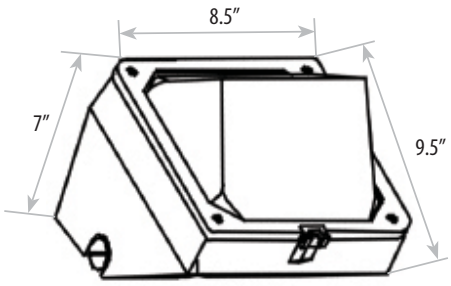

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Polycarbonate , Heat Resistant Lens
- Porcelain Medium Base Socket or CF42 Socket
- Lamp Included

OPTIONAL ACCESSORY:



Button Photocells
See Page 160

Item#	Order Code	Watts	Type	Volts
70095	**WP10F42EL**	1x42	Compact Fluorescent	120 - 277

Also Available with Glass Lens and in Other Wattages and Lamp Types

MINI POLYCARBONATE WALL PACK *WP14 SERIES*



FEATURES
- Polycarbonate Housing
- Die Cast Aluminum Back Plate
- Porcelain Medium Base or Two F13 Sockets
- 120V Operation
- Photocell Included
- Lamp Included

Also Available with Glass Lens and in Other Wattages and Lamp Types

Item#	Order Code	Watts	Type	Volts
71160	**WP14F26120L**	2 x 13	Compact Fluorescent	120
71175	**WP14H70R120L**	70	High Pressure Sodium	120

AMERICA LIGHT

FIXTURES WALL PACKS

STANDARD WALL PACKS *WP15 SERIES*

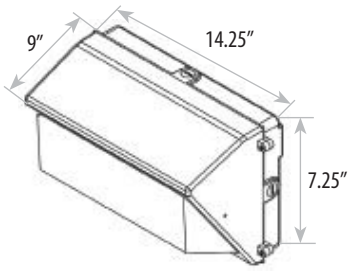

FEATURES

- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Borosilicate Molded Glass Lens
- Porcelain Medium Base or Two CF Sockets
- Hinged Face Frame
- Lamp Included

Other Wattages and Lamp Types are Available.

Item#	Order Code	Watts	Type	Volts
71177	**WP15/HOUSING**	-	Replacement Housing	-
71179	**WP15F64EL**	2 x 32	Compact Fluorescent	120-277
71180	**WP15F84EL**	2 x 42	Compact Fluorescent	120-277
71200	**WP15H150QL**	150	High Pressure Sodium	120/208/240/277
71210	**WP15M100QL**	100	Metal Halide	120/208/240/277
71211	**WP15M150QL**	150	Metal Halide	120/208/240/277
71215*	**WP15M175QL**	175	Metal Halide	120/208/240/277
ACCESSORIES				
71218	**WP15FC**	-	Full Cutoff Shield	
71220	**WP15WG**	-	Wire Guard	
71221	**WP15LG**	-	Poly Guard	

*While Supplies Last

OPTIONAL ACCESSORIES

WP15FC
Full Cutoff Shield

WP15WG
Wire Guard

WP15LG
Polycarbonate Guard

AMERICA LIGHT

FIXTURES WALL PACKS

LARGE WALL PACKS *WP20 / WP25 SERIES*

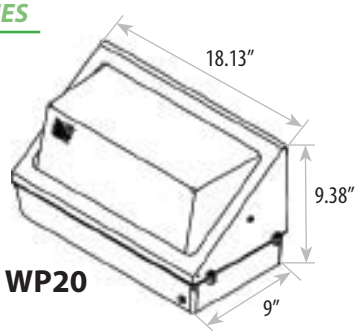

WP20



WP25

Item#	Order Code	Watts	Type	Volts
WP20 SERIES				
71241	**WP20/HOUSING**	-	Replacement Housing	-
71245	**WP20H250QL**	250	High Pressure Sodium	120/208/240/277
71250*	**WP20M250QL**	250	Metal Halide	120/208/240/277
71255	**WP20P250QL**	250	Pulse Start Metal Halide	120/208/240/277
WP25 SERIES				
71262	**WP25/HOUSING**		Replacement Housing	-
71265	**WP25H400QL**	400	High Pressure Sodium	120/208/240/277
71275*	**WP25M400QL**	400	Metal Halide	120/208/240/277
71289	**WP25P400QL**	400	Pulse Start Metal Halide	120/208/240/277
OPTIONAL ACCESSORIES				
71290	**WP20/25FC**		Cutoff	-
71292	**WP20/25WG**		Wire Guard	-
71293	**WP20/25LG**		Poly Guard	-

*While Supplies Last

FEATURES

- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Borosilicate Molded Glass Lens
- Porcelain Mogul Base Socket
- Hinged Face Frame
- Lamp Included

Other Wattages and Lamp Types are Available.

OPTIONAL ACCESSORIES

WP20/25FC
Full Cutoff Shield

WP20/25WG
Wire Guard

WP20/25LG
Polycarbonate Guard

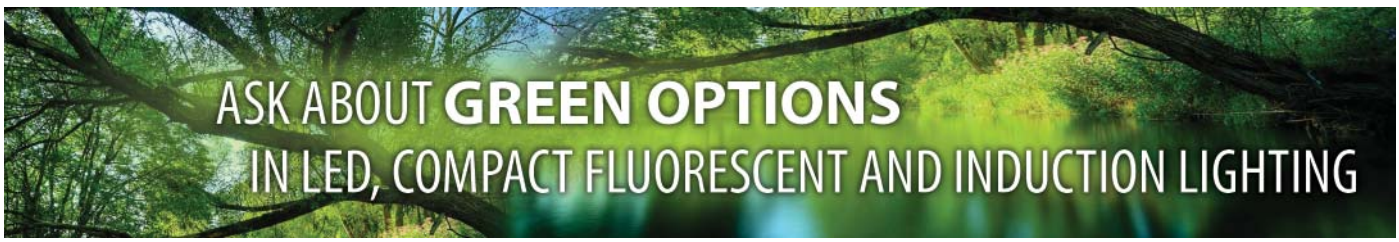

FIXTURES WALL PACKS

FULL CUTOFF WALL PACKS *WPC15 / WPC20 SERIES*



WPC15
Medium Base

FEATURES
- Dark Sky Friendly
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Tempered Glass Lens
- Porcelain Socket
- Hinged Face Frame
- Lamp Included



WPC20

Other Wattages and Lamp Types are Available.

OPTIONAL ACCESSORIES

WPC15/20 WG
Wire Guard

WPC15LG
WPC20LG
Polycarbonate Guard

Item#	Order Code	Watts	Type	Series	Volts
71680	**WPC15/HOUSING**	-	Replacement Housing	WPC15	-
71704	**WPCM150QL**	150	Metal Halide	WPC15	120/208/240/277
71705*	**WPC15M175QL**	175	Metal Halide	WPC15	120/208/240/277
71710	**WPC20/HOUSING**	-	Replacement Housing	WPC20	-
71730*	**WPC20M250QL**	250	Metal Halide	WPC20	120/208/240/277
71735	**WPC20P250QL**	250	Pulse Start Metal Halide	WPC20	120/208/240/277
71740*	**WPC20M400QL**	400	Metal Halide	WPC20	120/208/240/277
71745	**WPC20P400QL**	400	Pulse Start Metal Halide	WPC20	120/208/240/277
71770*	**WPC25M400QL**	400	Metal Halide	WPC25	120/208/240/277

* While Supplies Last

FIXTURES FLOOD LIGHTS

FLUORESCENT FLOOD LIGHT *FL10 SERIES*

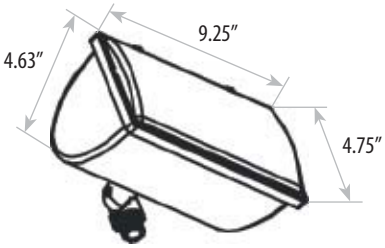

Item#	Order Code	Watts	Type	Housing	Volts
71781	**FL10F13L**	1 x 13	Compact Fluorescent	Black	120
71783	**FL10F26L**	2 x 13	Compact Fluorescent	Black	120
71784	**FL10F26LG**	2 x 13	Compact Fluorescent	Green	120

FEATURES
- Plastic Housing with Clear Lens
- Weatherproof Housing Gasket
- Adjustable 0.5 " Knuckle
- 6500K Lamp Included
- See Page 149 For Mounting Options

APPLICATIONS
- Garden
- Driveway
- Security
- Signs

AMERICA LIGHT

FLUORESCENT FLOOD LIGHT *FL15 SERIES*

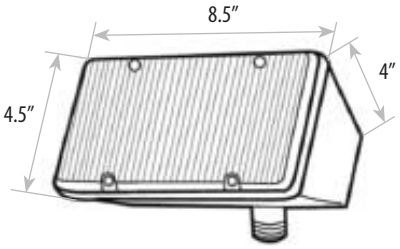

Item#	Order Code	Watts	Type	Housing	Volts
71786	**FL15F13B**	1 x 13	Compact Fluorescent	Black	120
71787	**FL15F13G**	1 x 13	Compact Fluorescent	Green	120
71788	**FL15F26B**	2 x 13	Compact Fluorescent	Black	120
71789	**FL15F26G**	2 x 13	Compact Fluorescent	Green	120

FEATURES
- Polycarbonate Housing and Lens
- Die Cast Aluminum Swivel Knuckle
- 120V Operation
- 27K-65K 13W Lamps Available
- Lamp Sold Separately

APPLICATIONS
- Garden
- Driveway
- Security
- Signs

FIXTURES FLOOD LIGHTS

QUARTZ HALOGEN FLOOD LIGHT *QH SERIES*

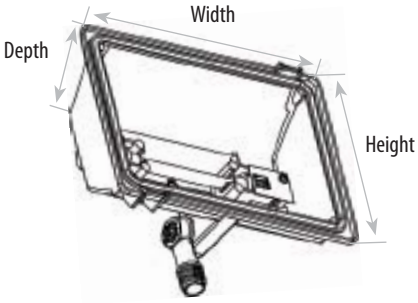

Item#	Order Code	Watts	Volts	Width	Height	Depth
71791	**QH300L**	300	120	9.25″	6.63″	4.13″
71793	**QH500L**	500	120	9.25″	6.63″	4.13″
71795	**QH1500L**	1,500	240	14.63″	9.5″	5.63″

FEATURES
- Die Cast Bronze Aluminum Housing
- Aluminum Reflector
- Tempered Glass Lens
- Adjustable 1/2″ Knuckle
- Lamp Included
- Optional Lamp Wattages and Voltages
- See Page 149 For Mounting Options

APPLICATIONS
- Garden
- Driveway
- Security
- Signs

AMERICA LIGHT

SMALL HORIZONTAL FLOOD LIGHT *FL31 & FL32 SERIES*

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Tempered Glass Lens
- Aluminum Reflector
- Porcelain Medium Base or F42 Socket
- Adjustable 1/2″ Threaded Knuckle
- Lamp Included
- See Page 149 For Mounting Options

Item#	Order Code	Watts	Type	Volts
FL31 SERIES				
71799	**FL31/HOUSING**		Replacement Housing	-
71800	**FL31F42EL**	1x42	Compact Fluorescent	120-277
71810	**FL31H50R120L**	50	High Pressure Sodium	120
71815	**FL31H70R120L**	70	High Pressure Sodium	120
71820	**FL31H100R120L**	100	High Pressure Sodium	120
71825	**FL31H150R120L**	150	High Pressure Sodium	120
FL32 SERIES				
71850	**FL32/HOUSING**		Replacement Housing	-
71855	**FL32M50QL**	50	Metal Halide	120/208/240/277
71860	**FL32M70QL**	70	Metal Halide	120/208/240/277
71865	**FL32M100QL**	100	Metal Halide	120/208/240/277
ACCESSORIES				
71870	**FL31/32GS**		Glare Shield	
71871	**FL31/32LG**		Polycarbonate Guard	
71872	**FL31/32WG**		Wire Guard	

FL31 SERIES



FL32 SERIES

Other Wattages and Lamp Types are Available.

OPTIONAL ACCESSORIES

FL31/32 GS
Glare Shield

FL31/32 LG
Polycarbonate Guard

FL31/32 WG
Wire Guard

FIXTURES FLOOD LIGHTS

MEDIUM FLOOD LIGHT *FL45 SERIES*

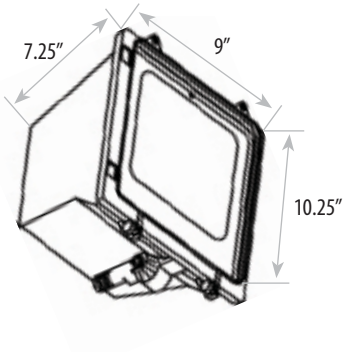

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Porcelain Medium Base or Two F32 Socket(s)
- Hinged Face Frame
- Lamp Included
- Optional Accessories
- See Page 149 For Mounting Options

Other Wattages and Lamp Types are Available.

Item#	Order Code	Watts	Type	Volts
71876	**FL45/HOUSING**	-	Replacement Housing	-
71879	**FL45F64EL**	2 x 32	Compact Fluorescent	120-277
71900	**FL45H150QL**	150	High Pressure Sodium	120/208/240/277
71905	**FL45M70QL**	70	Metal Halide	120/208/240/277
71910	**FL45M100QL**	100	Metal Halide	120/208/240/277
71912	**FL45M150QL**	150	Metal Halide	120/208/240/277
71915*	**FL45M175QL**	175	Metal Halide	120/208/240/277
HOUSING				
71918	**FL45GS**		Glare Shield	
71919	**FL45WG**		Wire Guard	
71920	**FL45LG**		Polycarbonate Guard	

*While Supplies Last

OPTIONAL ACCESSORIES

FL45GS
Glare Shield



FL45LG
Polycarbonate Guard



FL45WG
Wire Guard

AMERICA LIGHT

FIXTURES FLOOD LIGHTS

ROUND BACK FLOOD LIGHT *FL61 SERIES*

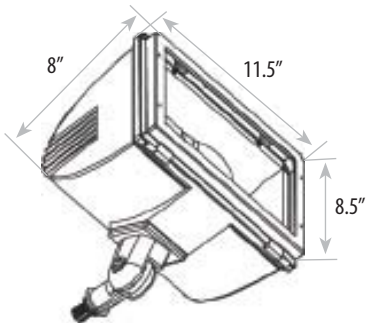

Item#	Order Code	Watts	Type	Volts
72120	**FL61/HOUSING**	-	Replacement Housing	-
72129	**FL61M150QL**	150	Metal Halide	120/208/240/277
72130*	**FL61M175QL**	175	Metal Halide	120/208/240/277

*While Supplies Last

Other Wattages and Lamp Types are Available.

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Tempered Glass Lens
- Porcelain Medium Base Socket
- Adjustable 1/2″ Threaded Knuckle
- Lamp Included
- See Page 149 For Mounting Options

OPTIONAL ACCESSORIES

FL60GS
Glare Shield

FL60LG
Polycarbonate Guard



FL60WG
Wire Guard

FL73SFX
Slip Fitter

LARGE COMPACT FLOOD LIGHT *FL65 SERIES*

SMALL YOKE

SLIP FITTER



Other Wattages and Lamp Types are Available.

Item#	Order Code	Watts	Type	Volts
72160	**FL65/HOUSING**	-	Replacement Housing	-
72170*	**FL65M400QLSY**	400	Metal Halide	120/208/240/277
72171	**FL65P400QLSY**	400	Pulse Start Metal Halide	120/208/240/277

*While Supplies Last

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Tempered Glass Lens
- Aluminum Reflector
- Mogul Socket
- Small Yoke Included
- Lamp Included

OPTIONAL ACCESSORIES

FL65LG
Plycarbonate Guard

FL65GS
Glare Shield

PTF
Pole Top Fitter
(See Page 148)



FL65WG
Wire Guard

FL65LY
Large Yoke

FI73SFX
Slip Fitter

AMERICA LIGHT

FIXTURES FLOOD LIGHTS

LARGE FLOOD LIGHT WITH U-BRACKET / SLIP FITTER *FL70 SERIES*

U-BRACKET

SLIP FITTER

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Tempered Glass Lens
- Aluminum Reflector
- Porcelain Mogul Base Socket
- Lamp Included
- Mounting Bracket Included

Other Wattages and Lamp Types are Available.

Item #	Order Code	Watts	Type	Volts
72180	**FL70/HOUSING**	-	Replacement Housing	-
WITH U-BRACKET				
72190	**FL70H250QLBR**	250	High Pressure Sodium	120/208/240/277
72195	**FL70H400QLBR**	400	High Pressure Sodium	120/208/240/277
72205*	**FL70M250QLBR**	250	Metal Halide	120/208/240/277
72210*	**FL70M400QLBR**	400	Metal Halide	120/208/240/277
72214	**FL70P250QLBR**	250	Pulse Start Metal Halide	120/208/240/277
72225	**FL70P400QLBR**	400	Pulse Start Metal Halide	120/208/240/277
WITH SLIP FITTER				
72230	**FL70H250QLSF**	250	High Pressure Sodium	120/208/240/277
72235	**FL70H400QLSF**	400	High Pressure Sodium	120/208/240/277
72245*	**FL70M250QLSF**	250	Metal Halide	120/208/240/277
72250*	**FL70M400QLSF**	400	Metal Halide	120/208/240/277
72255	**FL70P250QLSF**	250	Pulse Start Metal Halide	120/208/240/277
72260	**FL70P400QLSF**	400	Pulse Start Metal Halide	120/208/240/277
ACCESSORIES				
72261	**FL70/AL73GS**		Glare Shield	
72262	**FL70/AL73WG**		Wire Guard	
72263	**FL70/AL73LG**		Polycarbonate Guard	

*While Supplies Last

OPTIONAL ACCESSORIES

FL70/AL73GS
Glare Shield

FL70/AL73LG
Polycarbonate Guard

FL70/AL73WG
Wire Guard

FI73SFX*
Slip Fitter

FL73BR*
U-Bracket

*** See page 151 to order separately**

AMERICA LIGHT

FIXTURES FLOOD LIGHTS

EXTRA LARGE FLOOD LIGHTS WITH U-BRACKET / SLIP FITTER *FL90 SERIES*

U-BRACKET

SLIP FITTER

FEATURES

- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Tempered Glass Lens
- Aluminum Reflector
- Porcelain Mogul Base Socket
- Lamp Included
- Mounting Bracket Included

Item #	Order Code	Mounting Bracket	Watts	Type	Volts
72266	**FL90/HOUSING**	-	-	N/A - Housing	-
72270	**FL90M1000QLSF**	Slip Fitter	1,000	Metal Halide	120/208/240/277
72275	**FL90M1000QLBR**	U-Bracket	1,000	Metal Halide	120/208/240/277
72280	**FL90H1000QLSF**	Slip Fitter	1,000	High Pressure Sodium	120/208/240/277
72285	**FL90H1000QLBR**	U-Bracket	1,000	High Pressure Sodium	120/208/240/277
ACCESSORIES					
72290	**FL90GS**			Glare Shield	
72291	**FL90WG**			Wire Guard	
72292	**FL90LG**			Polycarbonate Guard	

Other Wattages and Lamp Types are Available.

OPTIONAL ACCESSORIES

FL90GS
Glare Shield

FL90SFX*
Slip Fitter

FL90WG
Wire Guard

FL90LG
Polycarbonate Guard

FL90BR*
U-Bracket

*** See page 151 to order separately**

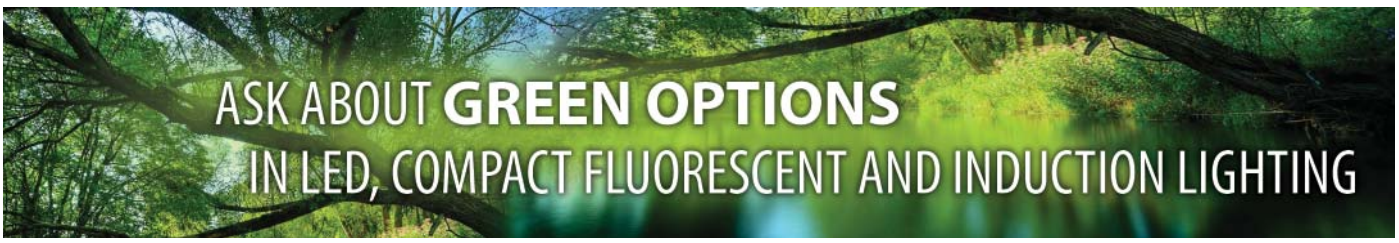

FIXTURES VANDAL RESISTANT

VANDAL RESISTANT

A



B



C



D



Item #	Order Code	Fig.	Watts	Type	Volts
72320	**VN20F13L**	A	13	Compact Fluorescent	120
72355	**VN30H70R120L**	C	70	High Pressure Sodium	120
72365	**VN30M70QL**	C	70	Metal Halide	120/208/240/277
72366	**VN30HF42EL**	C	1 x 42	Compact Fluorescent	120-277
72375	**VN30F26120L**	B	2x13	Compact Fluorescent	120
72420	**VN40M100QL**	D	100	Metal Halide	120/208/240/277
72425*	**VN40M175QL**	D	175	Metal Halide	120/208/240/277
72429	**VN40HF42EL**	D	1 x 42	Compact Fluorescent	120-277
72430	**VN40HF84EL**	D	2 x 42	Compact Fluorescent	120-277

*While Supplies Last

FEATURES
- Steel Pan
- Aluminum Bronze Housing
- Clear Polycarbonate Lens
- White Reflector
- Lamp Included

APPLICATIONS
- Walkways
- Corridors
- Stairways
- Entryways
- Perimeters
- Storage Areas
- Catwalks

Other Wattages and Lamp Types are Available.

OPTIONAL ACCESSORIES

VN30 WITH GLARE SHIELD



VN30GS
Glare Shield



VN20WL
VN30WL
VN40WL
White Lens

AMERICA LIGHT

FIXTURES

GARAGE LIGHTER *VNGL40 SERIES*



FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Bronze Powder Coat Finish
- Polycarbonate Lens
- White Reflector
- Porcelain Medium Base or Two F42 Socket(s)
- Lamp Included

OPTIONAL ACCESSORIES
- Swivel Pendant Mount
- Cordsets
- Downrods

Other Wattages and Lamp Types are Available.

Item #	Order Code	Watts	Type	Volts
72485	**VNGL40H150QL**	150	High Pressure Sodium	120/208/240/277
72500	**VNGL40M100QL**	100	Metal Halide	120/208/240/277
72505	**VNGL40M150QL**	150	Metal Halide	120/208/240/277
72510*	**VNGL40M175QL**	175	Metal Halide	120/208/240/277

*While Supplies Last

FLUORESCENT LOW BAY *LB30 SERIES*

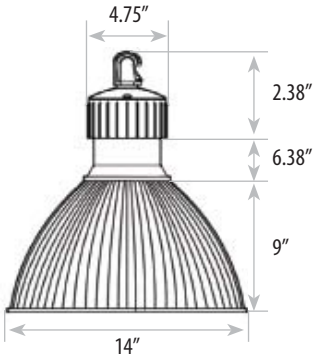

FEATURES
- Die Cast Aluminum White Gear Box & Cover
- 0.5″ Threaded Hole For Hook, Pipe Or Chain
- UV Stabilized 14″ Clear Prismatic Acrylic Refractor with Lens
- 65W Compact Fluorescent Lamp 6500K

APPLICATIONS
- Shopping Malls
- Restaurants
- Supermarkets
- Department Stores
- Factories

Item #	Order Code	Watts	Type	Volts
72545	**LB30F65120L**	65	Compact Fluorescent	120
72546	**LB30CF65/65K**	65	Replacement Lamp	-
72547	**LB30CF65/41K**	65	Replacement Lamp	-

FIXTURES BUILD-A-BAY

STANDARD HIGH-BAY HB11 SERIES

HB11 with AR16 Reflector
DL16 Lens, Low Bay Hardware



ECONOMY BAY EB21 SERIES

EB 21 with AR16 Reflector,
High Bay Hardware



Item #	Order Code	Watts	Type	Volts
HB11 SERIES HOUSING				
72559	**HB11/HOUSING**		Replacement Housing	-
72560*	**HB11M250QL**	250	Metal Halide	120/208/240/277
72565*	**HB11M400QL**	400	Metal Halide	120/208/240/277
72566	**HB11P250QL**	250	Pulse Start Metal Halide	120/208/240/277
72569	**HB11P400QL**	400	Pulse Start Metal Halide	120/208/240/277
EB21 SERIES HOUSING				
72598	**EB21/Housing**		Replacement Housing	-
72599*	**EB21M250QL**	250	Metal Halide	120/208/240/277
72600*	**EB21M400QL**	400	Metal Halide	120/208/240/277
72606	**EB21P250QL**	250	Pulse Start Metal Halide	120/208/240/277
72609	**EB21P400QL**	400	Pulse Start Metal Halide	120/208/240/277
REFLECTORS/REFRACTORS				
72665	**HBR/ALUMINUM/16**		AR16 - Aluminum Reflector	
72675	**HBR/ALUMINUM/22**		AR22 - Aluminum Reflector	
72720	**HBR/ACRYLIC/16**		ACR16 - Acrylic Refractor	
72725	**HBR/ACRYLIC/22**		ACR22 - Acrylic Refractor	
72730	**HBWG**		Wire Guard	
LENSES				
72760	**HBL/GLASS/16**		GL16 Glass Lens	
72765	**HBL/GLASS/22**		GL22 Glass Lens	
72795	**HBL/CONICAL/16**		CL16 Conical Lens	
72800	**HBL/CONICAL/22**		CL22 Conical Lens	
72805	**HBL/DROP/16**		DL16 Drop Lens	
72810	**HBL/DROP/22**		DL22 Drop Lens	

*While Supplies Last

FEATURES

- Choose Housing, Reflector/Refractor, & Lens
- Die Cast White Aluminum Housing w/ Hook
- Hardware Included for Low & High Bay Applications
- 16″ or 22″ Aluminum Reflector Available (AR)
- 16″ or 22″ Acrylic Refractor Available (ACR)
- Glass Lens (GL) for AR Series
- Conical Lens (CL) for AR or ACR Series
- Drop Acrylic (DL) Lens for AR or ACR Series
- Lamp Included

Other Wattages and Lamp Types are Available.

OPTIONAL ACCESSORIES

AR16/AR22
Aluminum Reflector

ACR16/ACR22
Acrylic Refractor

GL16/GL22
Glass Lens

CL16/CL22
Conical Lens

WG
Portable Construction

DL16/DL22
Drop Lens

FIXTURES AREA LIGHTING

POLE TOP AREA LIGHTS

AL10 - Traditional Incandescent

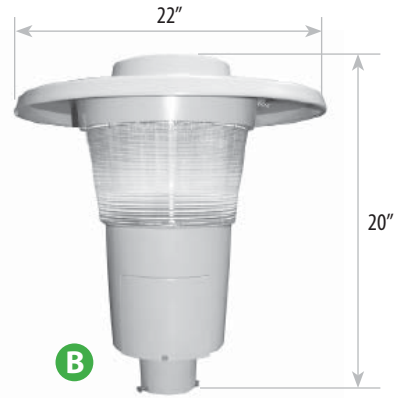

AL25 - Contemporary HID

AL26 - Contemporary HID

AL27 - Traditional HID

Item #	Order Code	Fig.	Type	Watts	Volts
72821	**AL10**	A	Incandescent	100	120
72840	**AL26/HOUSING**	C	Replacement Housing	-	-
72842	**AL26H150QL**	C	High Pressure Sodium	150	120/208/240/277
72844	**AL26M175QL**	C	Metal Halide	175	120/208/240/277
72845	**AL25/HOUSING**	B	Replacement Housing	-	-
72846	**AL25/GLASS**	-	AL25/AL26 Glass	-	-
72847	**AL25H150QL**	B	High Pressure Sodium	150	120/208/240/277
72849	**AL25M175QL**	B	Metal Halide	175	120/208/240/277
72850	**AL27/HOUSING**	D	Replacement Housing	-	-
72855	**AL27H150QL**	D	High Pressure Sodium	150	120/208/240/277
72857	**AL27M175QL**	D	Metal Halide	175	120/208/240/277

FEATURES

- Prismatic or Glass Refractor (AL25/AL26)
- Weather Proof Construction
- Porcelain Mogul Base Socket (AL25/AL26/AL27)
- Medium Base Socket (AL10)
- Fits 3″ Poles

Other Wattages and Lamp Types are Available.

FIXTURES AREA LIGHTING

SHOEBOX FIXTURES 16"x16" *AL73 SERIES*

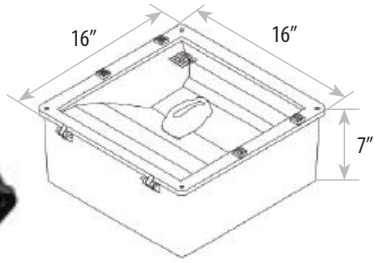

FEATURES
- Die Cast Aluminum Housing
- Chroma Guard Powder Coat Finish
- Porcelain Mogul Base Socket
- Anodized Throw Reflector
- Lamp Included

Other Wattages and Lamp Types are Available.

Item #	Order Code	Watts	Bulb	Volts
72875*	**AL73M250QL**	250	Metal Halide	120/208/240/277
72880*	**AL73M400QL**	400	Metal Halide	120/208/240/277
72882	**AL73P250QL**	250	Pulse Start Metal Halide	120/208/240/277
72885	**AL73P400QL**	400	Pulse Start Metal Halide	120/208/240/277

*While Supplies Last

OPTIONAL ACCESSORIES

FL73LG
Polycarbonate Guard

FLEM6
6" Arm

FL73BR
U-Bracket

FL73SFX
Slip Fitter

COBRA HEAD *CH20 SERIES*

CH20G

CH20FG



FEATURES
- Die Cast Aluminum Housing
- Borosilicate Glass Refractor or Flat Tempered Glass
- Adjustable Twist Lock Photo Control Receptacle
- Lamp & Ballast Sold Separately

APPLICATIONS
- Roadways
- Residential Streets
- Parking Areas
- Storage Areas
- Public Parks

Item #	Order Code	Type
72891	**CH20/HOUSING**	Housing Only
72897	**CH20G**	Borosilicate Glass
72898	**CH20FG**	Flat Tempered Glass

Other Wattages and Lamp Types are Available.

AMERICA LIGHT

FIXTURES

SPORTS LIGHTER *SP50 SERIES*

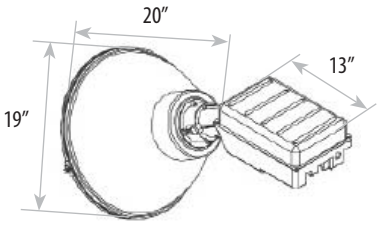

Other Wattages and Lamp Types are Available.

FEATURES
- Die Cast Aluminum Housing
- Adjustable Reflector with Mogul Socket
- Aluminum Reflector Included
- Glass Lens Included
- Clamp Band Included
- Order Mounting Bracket Separately
- Lamp Included

Item #	Order Code	Watts	Type	Volts
72915	**SP50M1000QL**	1,000	Metal Halide	120/208/240/277
72920	**SP50M1500QL**	1,500	Metal Halide	120/208/240/277
ACCESSORIES				
72935	**SP50HY**		Mounting Yoke	
72940	**SP50PT**		Pole Top Mount	

OPTIONAL ACCESSORIES



SP50PT
Pole Mount Top
Fits 2 3/8 Tenon

SP50HY
Mounting Yoke

Sports Lighter Brackets Available For Multiple Fixture Mounting. Call Your Representative For More Information.

DUSK TO DAWN SECURITY LIGHT *DD SERIES*

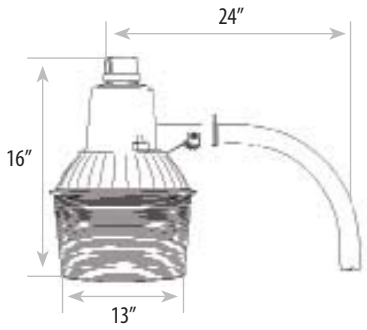

FEATURES
- Die Cast Aluminum Housing
- Aluminum Reflector
- 12″ Open Bottom Acrylic Refractor
- Porcelain Socket
- 18″ Mounting Arm Included
- Photocell Included
- Lamp Included

Item #	Order Code	Watts	Type	Volts
72950	**DD/HPS150/120V**	150	High Pressure Sodium	120
72955*	**DD/MV175/120V**	175	Mercury Vapor	120
72960	**DD/MH100/120V**	100	Metal Halide	120
72965	**DD/CF85/120V**	85	Compact Fluorescent	120
72966	**DD/LENS**	-	Replacement Lens With Reflector	-

* While Supplies Last

FIXTURES ROPE LIGHT

MINI ROPE LIGHTING 3/8" Diameter *RLM SERIES*

Item #	Order Code	Lamp / Color	Rope Diameter	Volts
73105	**RLM/INC/CLEAR/12V**	Incandescent Clear	0.38" (3/8")	12
73211	**RLM/INC/CLEAR/120V**	Incandescent - Clear	0.38" (3/8)	120
73212	**RLM/INC/RED/120V**	Incandescent -Red	0.38" (3/8)	120
73220	**RLM/LED/CW/120V**	Led - Cool White	0.38" (3/8)	120
73221	**RLM/LED/WW/120V**	Led - Warm White	0.38" (3/8)	120
73222	**RLM/LED/RED/120V**	Led - Red	0.38" (3/8)	120
73223	**RLM/LED/SNW/120V**	Led - Snow White	0.38" (3/8)	120

ACCESSORIES

Item #	Order Code	Item Description	Figure
73227	**RLM/TCONNECTOR**	T-Connector	**A**
73228	**RLM/XCONNECTOR**	X-Connector	**B**
73229	**RLM/TRACK**	Track	**C**
73230	**RLM/ENDCAP**	End Cap	**D**
73231	**RLM/HEATSPLICE**	Heatsplice	**E**
73232	**RLM/MOUNTINGCLIP**	Mounting Clip	**F**
73233	**RLM/EASYSPLICE**	Easysplice	**G**
73240	**RLM/INC/POWERCORD**	Powercord	**H**
73241	**RLM/LED/POWERCORD**	Powercord	**H**
73242	**RLM/INC/PWRCORD/12V**	12 Volt Powercord	**H**

Clear /Cool White/Warm White/ Snow White

Red

IMPORTANT ORDERING INFORMATION

Rope Light is Sold by Roll or Cut to Size and Sold in Increments

	LED	INCANDESCENT	12V INCANDESCENT
Feet in Roll	150 Ft.	200 Ft.	200 Ft.*
Increments	3 Ft.*	2 Ft.	1 Ft.

***Red LED Increments 4.5 Ft.** *** 30 Ft Max Per Run**

Please Note: Purchased Cut Rope Light is Non-Returnable

A T-Connector

B X-Connector

C Track

D End Cap

E Heat Splice

F Mounting Clip

G Easy Splice

H Powercord

FIXTURES ROPE LIGHT

ROPE LIGHTING 1/2" Diameter *RL SERIES*

Item #	Order Code	Lamp / Color	Rope Diameter	Volts
73251	**RL/INC/CLEAR/120V**	Incandescent - Clear	0.5" (1/2")	120
73252	**RL/INC/RED/120V**	Incandescent - Red	0.5" (1/2")	120
73253	**RL/INC/GREEN/120V**	Incandescent - Green	0.5" (1/2")	120
73254	**RL/INC/BLUE/120V**	Incandescent - Blue	0.5" (1/2")	120
73260	**RL/LED/CW/120V**	LED - Cool White	0.5" (1/2")	120
73261	**RL/LED/WW/120V**	LED - Warm White	0.5" (1/2")	120
73262	**RL/LED/RED/120V**	LED - Red	0.5" (1/2")	120
73263	**RL/LED/SNW/120V**	LED - Snow White	0.5" (1/2")	120

ACCESSORIES

Item #	Order Code	Item Description	Figure
73267	**RL/TCONNECTOR**	T- Connector	**A**
73268	**RL/XCONNECTOR**	X- Connector	**B**
73269	**RL/TRACK**	Track	**C**
73270	**RL/ENDCAP**	End Cap	**D**
73271	**RL/HEATSPLICE**	Heatsplice	**E**
73272	**RL/MOUNTINGCLIP**	Mounting Clip	**F**
73273	**RL/EASYSPLICE**	Easy Splice	**G**
73280	**RL/INC/POWERCORD**	Powercord	**H**
73287	**RL/LED/POWERCORD**	Powercord	**H**

Clear /Cool White/Warm White/ Snow White

Red

Green

Blue

IMPORTANT ORDERING INFORMATION

Rope Light is Sold by Roll or Cut to Size and Sold in Increments

	LED	INCANDESCENT
Feet in Roll	150 Ft.	200 Ft.
Increments	3 Ft.*	2 Ft.

***Red LED Increments 4.5 Ft.**

Please Note: Purchased Cut Rope Light is Non-Returnable

A T-Connector

B X-Connector

C Track

D End Cap

E Heat Splice

F Mounting Clip

G Easy Splice

H Powercord

LANDSCAPE LIGHTING LOW VOLTAGE - 12V

PALMLIGHTER *ND122 SERIES*

FEATURES
- Cast Aluminum Housing
- 1/2" Threaded Knuckle
- Clear Flat Glass Lens
- GU5.3 MR16 Base
- Available in Black, Verde Green and Bronze
- 20W MR16 Lamp Included, Rated up to 50W



Item #	Order Code	Color	Lamp	Description	Volts
75151	**ND122BK**	Black	MR16	MR16 Uplight	12
75153	**ND122VG**	Verde Green	MR16	MR16 Uplight	12
75154	**ND122WB**	Bronze	MR16	MR16 Uplight	12

SUNSET *SS12 SERIES*

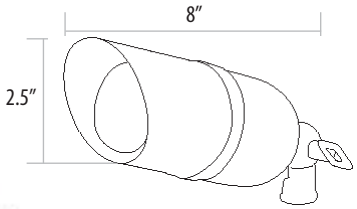

FEATURES
- Cast Brass Housing
- 1/2" Threaded Knuckle
- Clear Convex Glass Lens
- GU5.3 MR16 Base
- 35 W MR16 Lamp Included

Item #	Order Code	Color	Lamp	Description	Volts
75160	**SS12BZ**	Bronze	MR16	MR16 Uplight	12

PANAMA WELL LIGHT *ND362 SERIES*



FEATURES
- Black PVC Housing
- Adjustable Gimbal Ring for Aiming
- Includes 48" Cable
- Lamp Sold Separately

Item #	Order Code	Description	Lamp
75176	**ND362**	PAR36 Well Light	PAR36

LANDSCAPE LIGHTING

Additional Low Voltage Fixtures - 12V

Call Your Representative for more Information

NS07
Scoop

NS08
Underwater Light

NS09
Louvered Step Light

NS06
Eyelid

NP114SC

SP214SC

NP112TSC

NP214TSC

SP112SC

NP112TS2C

NP112TSC

NP04

NP115

120V BULLETS - PAR20 / PAR30 / PAR38 *PF SERIES*

Item #	Fig	Order Code	Type	Color	Length	Diameter
75501	A	**PF20BZ**	PAR20	Dark Bronze	6.25″	2.75″
75502	B	**PF20VG**	PAR20	Antique Verdi Green	6.25″	2.75″
75526	C	**PF30BZ**	PAR30	Dark Bronze	11.5″	4.25″
75527	D	**PF30VG**	PAR30	Antique Verdi Green	11.5″	4.25″
75551	E	**PF38BZ**	PAR38	Dark Bronze	12.5″	5.5″
75552	F	**PF38VG**	PAR38	Antique Verdi Green	12.5″	5.5″

NIGHTSCENES LANDSCAPE

FEATURES

- Die Cast Aluminum Housing
- Adjustable 0.5″ Knuckle
- Medium Porcelain Socket
- Weatherproof Gasket
- 120V
- Lamp Sold Separately

For Post Options Go To Page 149

A PF20BZ
Length: 6.25″
Diameter: 2.75″

B PF20VG
Length: 6.25″
Diameter: 2.75″

C PF30BZ
Length: 11.5″
Diameter: 4.25″

D PF30VG
Length: 11.5″
Diameter: 4.25″

E PF38BZ
Length: 12.5″
Diameter: 5.5″

F PF38VG
Length: 12.5″
Diameter: 5.5″

LANDSCAPE LIGHTING LINE VOLTAGE - 120V

PREMIUM BULLET *PB SERIES*

Item #	Fig.	Order Code	Color	Description	Lamp
75601	A	**PB38HSBK**	Black	Bullet Housing	PAR38
75611	B	**PB38HLBK**	Black	Bullet Housing w/internal Reflector	ED17 or CF Spiral
75616	C	**PB38LBK**	Black	Hood	-
75621	D	**PB38VBK**	Black	Visor	-

NIGHTSCENES LANDSCAPE

A **PB38HSBK**
Bullet

B **PB38HLBK**
Bullet

C **PB38LBK**
Hood

D **PB38VBK**
Visor

FEATURES

- Die Cast Aluminum Housing
- Chroma Guard Powder Coat Finish
- Adjustable 1/2" Knuckle
- Medium Porcelain Socket
- Visor or Hood Required
- For use with up to 100 Watt Metal Halide
- Remote Ballast Required for HID Applications
- Available in Standard (BK) Black or (WH) White Finish (special order)
- Lamp Sold Separately

APPLICATIONS

- Landscape
- Driveway
- Security
- Signs

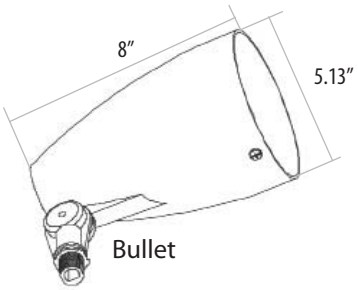

Bullet



Hood



Visor

LANDSCAPE LIGHTING HID PALM LIGHTER

PALMLIGHTER I *PL I SERIES*

Item #	Order Code	Fig.	Watts	Type	Volts
75651	**PLIM70QL**	A	70	Metal Halide	120/208/240/277
75652	**PLIM100QL**	A	100	Metal Halide	120/208/240/277

PALMLIGHTER II *PL II SERIES*

Item #	Order Code	Fig.	Watts	Type	Volts
75661	**PLIIM70QLVG**	B	70	Metal Halide	120/208/240/277
75662	**PLIIM70QLBK**	B	70	Metal Halide	120/208/240/277
75666	**PLIIM100QLVG**	B	100	Metal Halide	120/208/240/277
75667	**PLIIM100QLBK**	B	100	Metal Halide	120/208/240/277

PALMLIGHTER III *PL III SERIES*

Item #	Order Code	Fig.	Watts	Type	Volts
75671	**PLIIIM70QL**	C	70	Metal Halide	120/208/240/277
75672	**PLIIIM100QL**	C	100	Metal Halide	120/208/240/277
75681	**PLIIIM70QLSF**	D	70	Metal Halide	120/208/240/277
75682	**PLIIIM100QLSF**	D	100	Metal Halide	120/208/240/277

ACCESSORIES *PALM LIGHTER BULB*

Item #	Order Code	Watts	Type
75701	**PLM70PAR38**	70	Metal Halide
75702	**PLM100PAR38**	100	Metal Halide

FEATURES

- Most Effective Lighting Of Tall Palm Trees And Flags
- Specifically Designed Bulb For Reaching Tall Objects
- Reduce Power - Energy Savings Over Standard Metal Halide Floods
- Affordable Alternative To Well Lights
- Multiple Mounting Options
- Bright, White Light Reveals Natural Colors Of Objects At Night
- Allows For All Electrical Connections To Be Above Grade

PAR38
Palm Lighter Bulb
The Heart Of The System

FOCUSED BEAM AT VARIOUS HEIGHTS

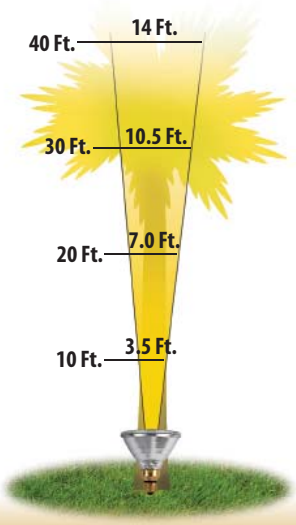

PLII
Concrete Pad Mounting
VG - Verde Green
BK - Black

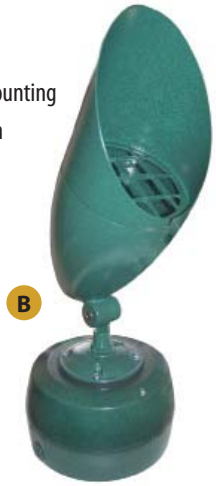

PL III
0.5" Threaded Knuckle

PL III SF
Fits on 2" Rigid Pipe

HEAVY DUTY
LANDSCAPER RESISTANT

LANDSCAPE LIGHTING PAGODA LIGHTS - 120V

Item #	Order Code	Fig.	Description	Color	Height	Diameter
75751	**PL2LSHBZ**	A	Two Louver Small Hood	Bronze	7.13″	6.13″
75752	**PL2LSHGN**	A	Two Louver Small Hood	Green	7.13″	6.13″
75753	**PL2LSHBK**	A	Two Louver Small Hood	Black	7.13″	6.13″
75756	**PL2LLHBZ**	B	Two Louver Large Hood	Bronze	7.13″	9.63″
75757	**PL2LLHGN**	B	Two Louver Large Hood	Green	7.13″	9.63″
75758	**PL2LLHBK**	B	Two Louver Large Hood	Black	7.13″	9.63″
75766	**PL3LSHBZ**	C	Three Louver Small Hood	Bronze	8.63″	6.13″
75767	**PL3LSHGN**	C	Three Louver Small Hood	Green	8.63″	6.13″
75768	**PL3LSHBK**	C	Three Louver Small Hood	Black	8.63″	6.13″
75771	**PL3LLHBZ**	D	Three Louver Large Hood	Bronze	8.63″	9.63″
75772	**PL3LLHGN**	D	Three Louver Large Hood	Green	8.63″	9.63″
75773	**PL3LLHBK**	D	Three Louver Large Hood	Black	8.63″	9.63″
75776	**PLRISERBZ**	E	Mounting Riser	Bronze	12″	0.5″
75777	**PLRISERGN**	F	Mounting Riser	Green	12″	0.5″
75778	**PLRISERBK**	G	Mounting Riser	Black	12″	0.5″

NIGHTSCENES LANDSCAPE

For Post Options Go To Page 149

Black
Green
A Bronze

Height: 7.13″
Diameter: 6.13″

Black
Green
B

Height: 7.13″
Diameter: 9.63″

E F G

Black
Green
C

Height: 8.63″
Diameter: 6.13″

Black
Green
D

Height: 8.63″
Diameter: 9.63″

LANDSCAPE LIGHTING

LOW VOLTAGE TRANSFORMERS *PX300, PX600 SERIES*

Item #	Order Code	Description	Input	Output
75846	**PX300**	300W Beige Steel	120V, 3A	12V, 13V or 14V
75847	**PX300S**	300W Stainless Steel	120V, 3A	12V, 13V or 14V
75848	**PX600**	600W Beige Steel	120V, 6A	12V, 13V or 14V

FEATURES

- Designed for Pool, Spa, Landscape Lighting
- Built in Overload Circuit Protection
- Top/Bottom Mounting Flanges
- Multiple Knock-Outs for ease of Installation

LOW VOLTAGE TRANSFORMERS WITH TIMER *NT SERIES*

Item #	Order Code	Watts	Circuits
75851	**NT150SS**	150	1 x 150W
75852	**NT300SSM**	300	1 x 300W
75853	**NT600SSM**	600	2 x 300W
75854	**NT900SSM**	900	3 x 300W

M=Multi Volt Taps (12V / 14V /17V)

FEATURES

- Stainless Steel Finish
- Automatic Timer
- Photocell Included
- 3' Powercord with molded 3-Prong Plug
- Top/Bottom Mounting Tabs

LOW VOLTAGE CABLE *NC SERIES*

Item #	Order Code	Description
75861	**NC500 - 8/2**	500 Ft Roll / #8 Wire 2 Conductor
75862	**NC500 -10/2**	500 Ft Roll / #10 Wire 2 Conductor
75863	**NC500 -12/2**	500 Ft Roll / #12 Wire 2 Conductor
75870	**NC-LVCC**	Low Voltage Cable Connector

Low Voltage Cable Connector

LANDSCAPE LIGHTING POSTS

IN-GROUND POSTS

Item #	Order Code	Fig.	Description	Color
75951	**NA021**	A	Plastic Low Voltage Spike	Black
75952	**MGSV**	B	Metal Low Voltage Spike	Galvanized Metal
75956	**POSTBZ**	C	Mounting Post	Dark Bronze (cap only)
75957	**POSTVG**	D	Mounting Post	Verdi Green (cap only)
75965	**POSTBKR**	E	Mounting Post	Black
75966	**POSTVGR**	F	Mounting Post	Green
75968	**POSTBK/POWER**	G	Mounting Post	Black
75970	**POSTVG/POWER**	H	Mounting Post	Green
75972	**POSTBK/HID**	I	HID Stake w/Wiring Compartment	Black
75974	**POST/CAP/PVC/BK**	J	PVC Cap for Posts	Black
75976	**POST/CAP/PVC/VG**	K	PVC Cap for Posts	Green
75978	**POST/CAM/ALUM/BK**	L	Aluminum Cap for Posts	Black
75980	**POST/CAP/ALUM/VG**	M	Aluminum Cap for Posts	Green
75986	**POSTBZ/POWER/SQ***	N	Square Mounting Post	Bronze*

*Also Available in White, Black and Green

NIGHTSCENES LANDSCAPE

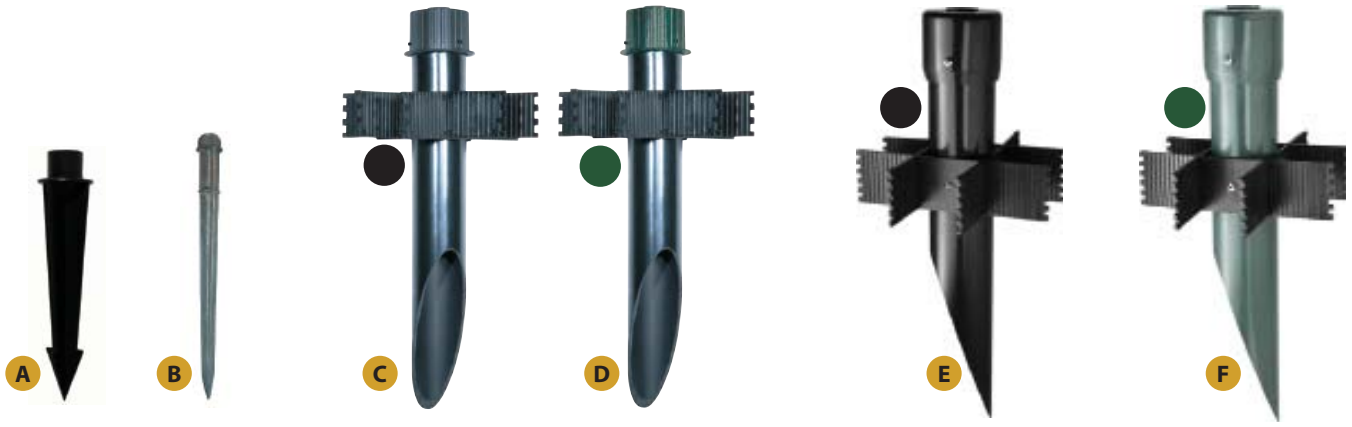

POLES & POSTS

ALUMINUM POLES

SOUTHEAST POLES

Item #	Order Code	Color	Dimensions
LIGHT DUTY			
79110	**PAR37BKLD**	Black	7′ (3″dia.)
79111	**PAR37WHLD**	White	7′ (3″dia.)
79115	**PAR38BKLD**	Black	8′ (3″dia.)
79116	**PAR38WHLD**	White	8′ (3″dia.)
79120	**PAR39BKLD**	Black	9′ (3″dia.)
79121	**PAR39WHLD**	White	9′ (3″dia.)
79130	**PAR310BKLD**	Black	10′ (3″dia.)
79131	**PAR310WHLD**	White	10′ (3″dia.)
79140	**PAR312BKLD**	Black	12′ (3″dia.)
79141	**PAR312WHLD**	White	12′ (3″dia.)
79150	**PAR315BKLD**	Black	15′ (3″dia.)
79151	**PAR315WHLD**	White	15′ (3″dia.)
79160	**PAR316BKLD**	Black	16′ (3″dia.)
79161	**PAR316WHLD**	White	16′ (3″dia.)
HEAVY DUTY			
79173	**PAR317BKHD**	Black	17′ (3″dia.)
79175	**PAR317BZHD**	Bronze	17′ (3″dia.)

POLE BASES

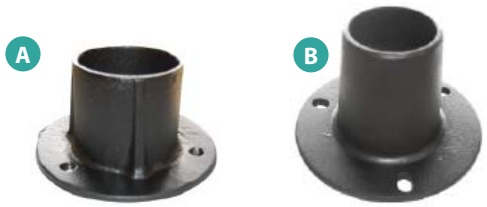

Item #	Order Code	Fig.	Description
79185	**PB3SBK**	A	**3″ Small Black Pole Base**
79186	**PB3LBK**	B	**3″ Large Black Pole Base**

FIBERGLASS POLES

• Smooth Bronze Finish • Round Tapered Fiberglass • 2.38″ Tenon

(More Sizes Available)

*Special Delivery Charges Apply

Item #	Order Code	Feet	Type	Overall Height	Burial Depth	Mounting Height	Max Weight Fixture	EPA (sq ft) in Sand 140 MPH	EPA (sq ft) in Sand 150 MPH
79205	**PFRT17BZSTND**	17	Standard Duty	17′	5′	12′	100lbs	3.1	2.6
79220	**PFRT22BZSTND**	22	Standard Duty	22′	6′	16′	100lbs	2.2	1.9
79230	**PFRT26BZSTND**	26	Standard Duty	26′	6′	20′	200lbs	2.3	1.9
79240	**PFRT32BZSTHD**	32	Heavy Duty	32′	7′	25′	300lbs	5.4	4.3

SOUTHEAST POLES

POLES & POSTS MOUNTING ACCESSORIES

Item #	Order Code	MFG#	Fig.	Description
79300	**MA/PTF**	FLPTM	A	Post Top Fitter: Fits Poles or Tenons with 2.38" OD
79305	**MA/PTF/2(90)**	PT-2(90)	B	Round External Mount: Two (2) Fixtures at 90 Degrees, Fits Poles or Tenons 2.38" - 3"
79310	**MA/PTF/2(180)**	PT-2(180)	C	Round External Mount: Two (2) Fixtures at 180 Degrees, Fits Poles or Tenons 2.38" - 3"
79315	**MA/PTF/3(90)**	PT-3(90)	D	Round External Mount: Three (3) Fixtures at 90 Degrees, Fits Poles or Tenons 2.38" - 3"
79320	**MA/PTF/3(120)**	PT-3(120)	E	Round External Mount: Three (3) Fixtures at 120 Degrees, Fits Poles or Tenons 2.38" - 3"
79325	**MA/PTF/4(90)**	PT-4(90)	F	Round External Mount: Four (4) Fixtures at 90 Degrees, Fits Poles or Tenons 2.38" - 3"
79330	**MA/ARM/6"**	FLEM6	G	Extruded Mounting Arm: 6" For Square Poles, textured bronze finish. 4" high, 2" wide, 6" long
79331	**MA/ARM/6"R**	FLEM6R	G	Extruded Mounting Arm: 6" For Round Poles, textured bronze finish. 4" high, 2" wide, 6" long
79335	**MA/ARM/10"**	FLEM10	G	Extruded Mounting Arm: 10" For Square Poles, textured bronze finish. 4" high, 2" wide, 10" long
79340	**MA/SFADJ/SM**	FL73SFX	H	Small External Mount Knuckle: Fits Poles or Tenons 2.38" OD
79345	**MA/SFADJ/LG**	FL90SFX	H	Large External Mount Knuckle: Fits Poles or Tenons 2.38" OD
79346	**SFARM/6"ADJ**	FLAM	I	Heavy Duty Adjustable Direct Mount Pole Arm, Bronze Finish, Angle Indicators & Hardware
79350	**MA/SFARM/6"**	PT-11	J	Slip Fitter with 6" Arm: Fits Poles or Tenons 2.38" - 3" OD
79355	**MA/SFARM(180)/6"**	PT-12(180)	K	Slip Fitter with 2 6" Arms: Fits Poles or Tenons 2.38" - 3"OD
79360	**MA/SFSQ**	PTSFSQ	L	Square Slip Fitter: Fits Poles or Tenons 2.38" OD, custom drilled for up to 4 Fixtures
79361	**MA/SFRD**	PTSFRD	M	Round Slip Fitter: Fits Poles or Tenons 2.38" OD, custom drilled for up to 4 Fixtures

POLES & POSTS MOUNTING ACCESSORIES - BULLHORNS

SQUARE BULLHORNS

FEATURES
- Bronze Finish
- Slips over 2.38" OD Tenons
- Provides 2, 3, or 4 2/38" tenons for multiple fixtures on poles

Item # 79370 **MFG#** BHS2
Order Code: MA/B-HORN/SQ2

Item # 79375 **MFG#** BHS3
Order Code: MA/B-HORN/SQ3

Item # 79380 **MFG#** BHS3(120)
Order Code: MA/B-HORN/SQ3(120)

Item # 79385 **MFG#** BHS4
Order Code: MA/B-HORN/SQ4

Item # 79390 **MFG#** BHS4(90)
Order Code: MA/B-HORN/SQ4(90)

ROUND BULLHORNS

FEATURES
- Bronze Finish
- Slips over 2.38" OD Tenons
- Provides 2, 3, or 4 2/38" tenons for multiple fixtures on poles

Item # 79405 **MFG#** BHR2
Order Code: MA/B-HORN/RD2

Item # 79410 **MFG#** BHR3
Order Code: MA/B-HORN/RD3

Item # 79415 **MFG#** BHR3(120)
Order Code: MA/B-HORN/RD3(120)

Item # 79420 **MFG#** BHR4
Order Code: MA/B-HORN/RD4

Item # 79425 **MFG#** BHR4(90)
Order Code: MA/B-HORN/RD4(90)

POLES & POSTS MOUNTING ACCESSORIES

REDUCERS

Item # 79445 **MFG#** PT1
Order Code: MA/RED/RD3>2-3/8

Reducer - Externally mounts to poles / tenons up to 3″ and reduces to 2 3/8″ OD tenon

Item # 79450 **MFG#** MNH2
Order Code: MA/RED/RD2-3/8>1/2

Conduit Slipfitter - Slips over 2 3/8″ OD tenon to accept fixtures with 1/2″ adjustable knuckle

Item # 79455 **MFG#** FLPTF
Order Code: MA/RED/RD3>1/2

Post Top Fitter - Slips over 3″ poles or tenons, coin plugs allow for top or dual side mounting of fixtures with 1/2″ adjustable knuckles

Item # 79460 **MFG#** PBA4
Order Code: MA/RED/SQ4>2-3/8

Square Internal Mount Vertical Tenon adds 2 3/8″ Tenon to 4″ Square Pole

Item # 79465 **MFG#** PBA5
Order Code: MA/RED/SQ5>2-3/8

Square Internal Mount Vertical Tenon adds 2 3/8″ Tenon to 5″ Square Pole

WALL MOUNT BRACKETS

AMERICA LIGHT

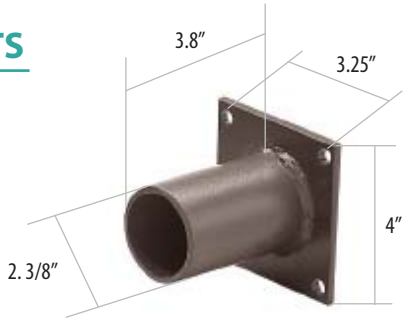

Item # 79495 **MFG#** WM2
Order Code: MA/WALLMOUNT/3.8″

Wall Mount Bracket with 2 3/8″ O.D. Tenon

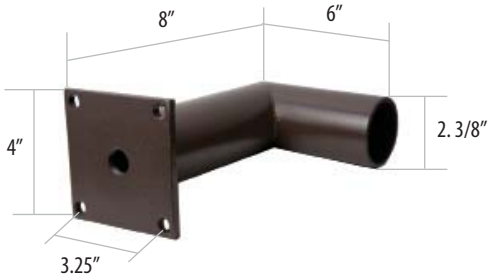

Item # 79500 **MFG#** WM4
Order Code: MA/WALLMOUNT/(90)/8

Wall Mount Bracket
with 90 Degree, 2 3/8″ O.D. Tenon

POLES & POSTS MOUNTING ACCESSORIES

U-BRACKETS & YOKES

Item # 79530 **MFG#** FL73BR
Order Code: MA/U-BKT/SM

Small Adjustable Trunion, Stamped, Bronze Finish For use with FL70

Item # 79535 **MFG#** FL90BR
Order Code: MA/U-BKT/LG

Large Adjustable Trunion, Stamped, Bronze Finish For use with FL90

Item # 79540 **MFG#** FLYOKE
Order Code: MA/YOKE

Trunion, Stamped Heavy Duty, Textured Bronze Finish For use with FL70

PLASTIC POST CAPS - BLACK

Item #	Order Code	Pole
79580	**MA/CAP/RD3**	3″ Round
79585	**MA/CAP/RD4**	4″ Round
79590	**MA/CAP/RD4.5**	4.5″ Round
79595	**MA/CAP/RD5**	5″ Round
79600	**MA/CAP/SQ4**	4″ Square
79605	**MA/CAP/SQ5**	5″ Square
79610	**MA/CAP/SQ6**	6″ Square

Round Post Cap

Square Post Cap

METAL POST CAPS - BRONZE

Item #	Order Code	Pole
79635	**MA/METALCAP/SQ3**	3″ Square
79640	**MA/METALCAP/SQ4**	4″ Square
79645	**MA/METALCAP/SQ5**	5″ Square
79650	**MA/METALCAP/SQ6**	6″ Square

AMERICA LIGHT

POLES & POSTS

GL16WH8
PF10

GL16WH5
PFP5I

ROUND GLOBES (SPHERES)

Item #	Order Code	Height	Fitter
80155	**GLS12WH5**	12″	5.25″
80160	**GLS16WH5**	16″	5.25″
80165	**GLS16WH8**	16″	8″

GLV21CL8
PF10

GLV17CL5
PFP5I

VICTORIAN GLOBES

Item #	Order Code	Height	Fitter
80205	**GLV17CL5**	17″	5.25″
80210	**GLV21CL8**	21″	8″

GLA21CL8
PF10

GLA14CL5
PFP5I

ACORN GLOBES

Item #	Order Code	Height	Fitter
80255	**GLA17CL5**	17″	5.25″
80260	**GLA23CL8**	23″	8″

Additional sizes and finish options may be available for globes. Call your representative for more information.

GLOBE FITTERS

For 10″-16″ Spheres, Acorns and Victorian Globes with 5.25″ Opening
Applications: Incandescent or Self Ballasted Compact Fluorescent

Item # 80755
Order Code: PFP5I

Plastic Fitter, 5.25″, Neckless.

Item # 80760
Order Code: PFA5I

Aluminum Fitter, 5.25″, Neckless.

Item # 80761
Order Code: PFA5IHD

Heavy Duty Aluminum Fitter, 5.25″ Neckless.

For Globes with 8″ Necks
Applications: Self Ballasted CF or HID

Item # 80805
Order Code: PF10/HOUSING

Cast Aluminum Fitter w/ Mogul Base Socket for Spheres, Acorns and Victorian Globes with 8″ Necks.

Item # 80850
Order Code: PF10M175QL

175 Watt Metal Halide

ACCESSORIES

WIRE NUTS

Item #	Order Code	Fig.	Description	Pk. Qty.
81005	**WN/BLUE/SMALL/BOX**	**A**	Small Blue	100 (Box)
81010	**WN/ORANGE/BOX**	**B**	Medium Orange	100 (Box)
81015	**WN/ORANGE/BAG**	**B**	Medium Orange	500 (Bag)
81020	**WN/YELLOW/BOX**	**C**	Medium Yellow	100 (Box)
81025	**WN/YELLOW/BAG**	**C**	Medium Yellow	500 (Bag)
81030	**WN/YELLOW/WING/BAG**	**D**	Yellow - Wing	500 (Bag)
81035	**WN/RED/BOX**	**E**	Medium Red	100 (Box)
81040	**WN/RED/BAG**	**E**	Medium Red	500 (Bag)
81045	**WN/RED/WING/BAG**	**F**	Red - Wing	500 (Bag)
81050	**WN/TAN/WING/BAG**	**G**	Tan - Wing	500 (Bag)
81055	**WN/BLUE/WING/BAG**	**H**	Blue - Wing	100 (Bag)
81060	**WN/DISCONNECT**	**I**	Disconnect	100 (Box)

FLUORESCENT STARTERS

Item #	Order Code	Watts	Pk. Qty.
81505	**FS-2**	14/15/20	25
81510	**FS-4**	13/30/40	25
81520	**FS-5**	4/6/8	25
81530	**FS-22**	22	25
81540	**FS-25**	22/25	25

OCCUPANCY SENSORS *OS SERIES*

GORILLA ELECTRICAL

Item #	Order Code	Fig.	Load Rating	Volts	Range Detection	Installation Height	Time Delay (Adjustable)	Pk. Qty.
81655	**OSWMV**	**A**	2.7A @120V 1.18A @277V	120 277	120^0	3.3-5.2Ft.	8 +/- 3 Seconds 7 +/- 2 Minutes	**EA**
81660	**OSC120**	**B**	1800W Tungsten 2000VA Ballast	120	360^0	>10 Ft.	8 +/- 3 Seconds 7 +/- 2 Minutes	**EA**
81661	**OSC277**	**B**	2000W Resistive	277	360^0	>10 Ft.	8 +/- 3 Seconds 7 +/- 2 Minutes	**EA**

ACCESSORIES

BATTERIES

Item #	Order Code	Fig.	Volts	Amp Hours	Dimensions
81705	**BAT/4V/4.5AH**	**A**	4	4.5	1.9" x 2 x 3.7"
81725	**BAT/4V/5AH/2C**	**C**	4	5	3" x 2.1" x 2.6"
81730	**BAT/4V/8AH/2C**	**C**	4	8	3.8" x 2.1" x 4"
81735	**BAT/6V/4-4.5AH**	**A**	6	4-4.5	2.8" x 1.9" x 4"
81750	**BAT/6V/7AH/L**	**A**	6	7	6" x 1.3" x 3.7"
81760	**BAT/6V/10-12AH**	**A**	6	10-12	6" x 2" x 3.7"
81765	**BAT/6V/5AH/3C**	**C**	6	5	5.5" x 2.1" x 3"
81780	**BAT/12V/4-5AH**	**A**	12	4-5	3.5" x 2.8" x 4"
81785	**BAT/12V/7-8AH**	**A**	12	7-8	6" x 2.6" x 3.7"
81790	**BAT4AA/SQ/WL**	**B**	4	-	4AA/Square
81799	**BAT/FAA**	**D**	1.2	-	FATAA

EMERGENCY BALLASTS

Item #	Order Code	MFG#	Lumens	Application	Input Volts	Dimensions
81905	**EMBAL/450L**	FH3	450	(1) CF9-42 4 Pin, (1) F4-28T5, (1) F13-40T8, (1) F14-40T12	120/277	1.5" x 2.4" x 9.4"
81915	**EMBAL/700L**	FH4	700	(1) CF9-55 4 Pin, (2) CF9-32 4 Pin, (1) F4-28T5, (1) F13-72T8, (2) F13-32T8, (1/2) F14-40T12, (1) F25-110T12HO	120/277	1.5" x 2.4" x 9.4"
81925	**EMBAL/750L**	FH1	750	(1) CF9-42 4 Pin, (2) CF9-39 4 Pin, (1) F4-28T5, (1/2) F13-28T8, (1/2) F14-25T12	120/277	1.5" x 2.4" x 9.4"
81930	**EMBAL/1400L**	FH5	1400	(1) CF9-55 4 Pin, (2) CF9-39 4 Pin, (1) F24-54T5HO, (1) F4-35T5, (1/2) F13-32T8, (1/2) F14-40T12, (1) F25-110T12HO	120/277	1.5" x 2.4" x 13.3"

ACCESSORIES

LGR/GLR

LHR/HLR

LEBAA/HEBAA

KLK/KTK

300V GLASS FUSES *LGR/GLR SERIES*

Item #	Order Code	MFG#	Amps	Pk. Qty.
82155	**LGR1**	GLR1	1	5
82160	**LGR1.5**	GLR1.5	1.5	5
82165	**LGR2**	GLR2	2	5
82170	**LGR3**	GLR3	3	5
82175	**LGR4**	GLR4	4	5
82180	**LGR5**	GLR5	5	5
82185	**LGR6**	GLR6	6	5
82190	**LGR7**	GLR7	7	5
82195	**LGR8**	GLR8	8	5
82200	**LGR9**	GLR9	9	5
82205	**LGR10**	GLR10	10	5
82215	**LGR15**	GLR15	15	5
82225	**LHR**	HLR	-	10

600V LIGHTING FUSES *KLK/KTK SERIES*

Item #	Order Code	MFG#	Amps	Pk. Qty.
82310	**KLK2**	KTK2	2	10
82315	**KLK3**	KTK3	3	10
82320	**KLK5**	KTK5	5	10
82325	**KLK7**	KTK7	7	10
82330	**KLK10**	KTK10	10	10
82335	**KLK15**	KTK15	15	10
82340	**KLK20**	KTK20	20	10
82345	**KLK25**	KTK25	25	10
82350	**KLK30**	KTK30	30	10
82355	**LEBAA**	HEBAA	-	10
DOT FUSES & HOLDERS				
82359	**KLDR10**	FNQR10		10
82360	**LEBAAS**	Break-Away Holder		10
82365	**HEBAW**	Break-Away Holder		10
82370	**HETAW**	Break-Away Holder		10
82375	**HEBAWRYC**	Break-Away Holder		10
82380	**HETAWRYC**	Break-Away Holder		10

THERMAL DETECTOR

Item # 82455
Order Code: TD/L

- 18 ga, 105^0 C , 6" leads
- 120 Volt
- Opens at 135^0 C

ACCESSORIES

TIME CLOCKS

INTERMATIC

Item #	Order Code	Description	MFG#	Housing	Volts
83120	**TC/120V/SPST**	Single Pole Single Throw 40 Amp	T101	Steel	120
83140	**TC/120V/SPST/P**	Single Pole Single Throw 40 Amp	T101P	Plastic	120
83160	**TC/120V/SPST/R**	Single Pole Single Throw 40 Amp	T101R	Steel, Raintight	120
83180	**TC/120V/DPST**	Double Pole Single Throw 40 Amp	T103	Steel	120
83200	**TC/DPST/P**	Double Pole Single Throw 40 Amp	T103P	Plastic	120
83220	**TC/208-277/DPST**	Double Pole Single Throw 40 Amp	T104	Steel	208-277
83240	**TC/208-277/DPST/P**	Double Pole Single Throw 40 Amp	T104P	Plastic	208-277

TUBE GUARDS WITH END CAPS (24 per pack)

STARBRITE PLASTICS

Item #	Order Code	Lamp	Color	Length
85100	**TG4T5C**	Fluorescent T5	Clear	4′
85101	**TG4T5HOC**	Fluorescent T5 HO	Clear	4′
85105	**TG4T8C**	Fluorescent T8	Clear	4′
85115	**TG4T12C**	Fluorescent T12	Clear	4′
85125	**TG5T8C**	Fluorescent T8	Clear	5′
85135	**TG6T8C**	Fluorescent T8	Clear	6′
85145	**TG8T8C**	Fluorescent T8	Clear	8′
85150	**TG8T12C**	Fluorescent T12	Clear	8′
85260	**TG4T12A**	Fluorescent T12	Amber	4′
85270	**TG4T12B**	Fluorescent T12	Blue	4′
85280	**TG4T12G**	Fluorescent T12	Green	4′
85290	**TG4T12P**	Fluorescent T12	Purple	4′
85300	**TG4T12R**	Fluorescent T12	Red	4′
85310	**TG4T12Y**	Fluorescent T12	Yellow	4′
85320	**TG4T8A**	Fluorescent T8	Amber	4′
85330	**TG4T8B**	Fluorescent T8	Blue	4′
85340	**TG4T8G**	Fluorescent T8	Green	4′
85350	**TG4T8P**	Fluorescent T8	Purple	4′
85360	**TG4T8R**	Fluorescent T8	Red	4′
85370	**TG4T8Y**	Fluorescent T8	Yellow	4′
85410	**TG8T12A**	Fluorescent T12	Amber	8′
85420	**TG8T12B**	Fluorescent T12	Blue	8′
85430	**TG8T12G**	Fluorescent T12	Green	8′
85440	**TG8T12P**	Fluorescent T12	Purple	8′
85450	**TG8T12R**	Fluorescent T12	Red	8′
85460	**TG8T12Y**	Fluorescent T12	Yellow	8′

Replacement Tube Guard Caps

Cap for Fluorescent T8
Item# 85660
Order Code: TGT8CAP

Cap for Fluorescent T12
Item# 85670
Order Code: TGT12CAP

ACCESSORIES PHOTOCELLS

A

B

C 

D

E

F

G

BUTTON PHOTOCELLS 12 per pack

Item #	Fig.	Order Code	Brand	MFG#	Volts	Amps Tungsten/Ballast	Watts/VA Tungsten/Ballast
87025	A	PC/BUTTON/120V-I	Intermatic	K4021C	120	15/8.3	1800/1000
87030	B	PC/BUTTON/120V/CVR-I	Intermatic	K4321C	120	15/8.3	1800/1000
87035	A	PC/BUTTON/208-277V-I	Intermatic	K4023C	208-277	15/8.3	3100-4150/1700-2300
87050	C	PC/BUTTON/120V-T	Tork	3000	120	-	1500/1200
87055	C	PC/BUTTON/208-277V-T	Tork	3002	208-277	-	1500/1200

1/2" HUB PHOTOCELLS 12 per pack

Item #	Fig.	Order Code	Brand	MFG#	Volts	Amps Tungsten/Ballast	Watts/VA Tungsten/Ballast
87155	D	PC/HUB/120V-I	Intermatic	K4121C	120	15/8.3	1800/1000
87160	D	PC/HUB/120V/METAL-I	Intermatic	K4121M	120	16.7/15	2000/1800
87165	D	PC/HUB/120V/25AMP-I	Intermatic	K4141C	120	25/25	3000/3000
87170	D	PC/HUB/208-277V-I	Intermatic	K4123C	208-277	15/8.3	3100-4150/1700-6300
87205	E	PC/HUB/120V-T	Tork	2000	120	-	2000/1800
87210	E	PC/HUB/208-277V-T	Tork	2000-2	208-277	-	2000/1800
87215	E	PC/HUB/120-277V-T	Tork	2000-7	120-277	-	2000/1800

1/2" SWIVEL PHOTOCELLS 12 per pack

Item #	Fig.	Order Code	Brand	MFG#	Volts	Amps Tungsten/Ballast	Watts/VA Tungsten/Ballast
87280	F	PC/SWIVEL/120V-I	Intermatic	K4221C	120	15/8.3	1800/1000
87283	F	PC/SWIVEL/240V-I	Intermatic	K4222	240	15/8.3	3600/2000
87290	F	PC/SWIVEL/208-277V-I	Intermatic	K4223C	208-277	15/8.3	3100-4150/1700-2300
87305	G	PC/SWIVEL/120V-T	Tork	2001	120	-	2000/1800
87310	G	PC/SWIVEL/208-277V-T	Tork	2002	208-277	-	2000/1800

ACCESSORIES

TWIST LOCK PHOTOCELLS 12 per pack

INTERMATIC TORK

Item #	Fig.	Order Code	MFG#	Volts	Description	Watts/VA Tungsten/Ballast
PHOTOCELLS - INTERMATIC						
87380	A	PC/T-LOCK/120V-I	LC4521	120	Photocell	1000/1000
87385	A	PC/T-LOCK/208-277V-I	LC4523	208-277	Photocell	1700-2300/1700-2300
87390	A	PC/T-LOCK/480V-I	LC4535	480	Photocell	1000/4000
ACCESSORIES						
87395	A	PC/T-LOCK/SHORT/CAP-I	K4500	120-480	Shorting Cap	-
87400	B	PC/T-LOCK/REC-I	K121	120-480	Receptacle Only	-
87405	C	PC/T-LOCK/REC/BKT-I	K122	120-480	Receptacle w/ Mounting Bracket	-
PHOTOCELLS - TORK						
87425	A	PC/T-LOCK/120V-T	5021S	105-130	Photocell	1200/1800VA
87430	A	PC/T-LOCK/208-277V-T	5024S	208-277	Photocell	2080-2770/2080-2770
87435	A	PC/T-LOCK/120-277V-T	5007S	105-130	Photocell	1200-2850/1200-2850
87440	A	PC/T-LOCK/480V-T	5008S	208-285	Photocell	1000/1800
ACCESSORIES						
87445	A	PCT/T-LOCK/SHORT/CAP-T	5500	120-480	Shorting Cap	-
87450	B	PC/T-LOCK/REC-T	2223	120-480	Receptacle	-
87455	C	PC/T-LOCK/REC/BKT-T	2421	120-480	Receptacle w/ MountingBracket	-

A

B

C

AC DISCONNECT

Item #	Order Code
99010	ACD60NF

GORILLA ELECTRICAL

• 60 AMP • 240V OUTDOOR

- Non-fusible pullout
- Use when local fuse protection is not required
- Turns on/off with removal of pullout handle
- 1-Phase 2-wire design with ground lug
- Easy installation

FISH TAPES

Item #	Order Code	Feet	Tape
99510	FT50S	50	Steel
99520	FT100NM	100	Nylon
99530	FT120S	120	Steel
99540	FT150NM	150	Nylon
99550	FT200S	200	Steel
99560	FT200SS	200	Stainless Steel

DIDN'T FIND WHAT YOU ARE LOOKING FOR?

HERE ARE SOME OF OUR OTHER PRODUCT LISTINGS

WALL PACKS

WH15/WH20/WH25
Hooded Semi-Cutoff
Wall Pack

WPA15/WPA20
Accord Semi Cutoff
Wall Pack

WPC10
Constellation Mini Full
Cutoff Wall Pack

AD30/AD40
Adjusta
Area/Wall Light

WCS/WCD
Wall Cylinder
Up /Down Light

WPC35
Constellation Rounded
Full Cutoff Wall Pack

WP34
Crescent II Up/Down
Wall Sconce

WPC36
Orion
Wall Sconce

WP35
Crescent Wall
Sconce Down Light

WP36
Crescent Wall Sconce
Up/Down Light

WPR400F
Acclaim Wall Pack
Open Frame

WPR40HC
Acclaim Wall Pack
Half Cutoff Frame

WPR40GR
Acclaim Wall Pack
Grid Frame

WPR22GR
Focus Bulkhead
Grid Frame

WPR22HC
Focus Bulkhead
Half-Cutoff Frame

WPR220F
Focus Bulkhead
Open Frame

WPS22GR
Frontier Bulkhead
Grid Frame

WPS22HC
Frontier Bulkhead
Half Cutoff Frame

WPS220F
Frontier Bulkhead
Open Frame

WP18C
Industrial Mini
Cutoff Bulkhead

WP180
Industrial Mini
Open Bulkhead

WPS30
12″ Square
Wall Pack

WPS40
Slimline Wall Pack

AREA / PARKING / ROADWAY LIGHTS

FA20 / FA30

BW20 / BW30

KHU20 / KHU30

MD30

FLOOD LIGHTS

FL46
Medium Spot Flood

FL50
Deluxe 12" Flood

GARAGE LIGHT

VNGL30
Deluxe Garage Lighter

ENTRY LIGHTS

EL10
100W Incandescent

EL15
1x13W Compact Fluoresent

BOLLARDS

BOG
Dome Top Refractor

BOR
Dome Top Reflector

BOL
Dome Top Louvered

BOFR
Flat Top Reflector

BOFL
Flat Top Louvered

BOSFG
Square Refractor

BOSFR
Square Reflector

BOSFLS
Square Louvered

VAPOR PROOF

VB23/VB33
Incandescent

VP23/VP33
Incandescent

VW23/VW33
Incandescent

VP43
HID

VPFHB
Fluorescent High Bay

VP15
Vapor Proof Fluorescents

POLES

- **Square Steel** - PSS SERIES
- **Square Aluminum** - PAS SERIES
- **Square Fiberglass** - PFS SERIES

- **Round Steel** - PSR SERIES
- **Round Aluminum** - PAR SERIES

- **Round Tapered Aluminum** - PART SERIES
- **Round Tapered Steel** - PSRT SERIES

- **Square Tapered Concrete** - PCST SERIES

FLUORESCENT DRUM

FD SERIES Drum

FD SERIES Dome

MULTI-PURPOSE BRACKET

MPB SERIES

TRACK LIGHTING

THSC
Step Cylinder

THCC
Can Cylinder

THRB
Round Back

THGR
Gimbal Ring

THUH
Universal Holder

THSQMR16
MR16 Square Cylinder

THRBMR16
MR16 Round Back

THGRMR16
MR16 Gimbal Ring

STILL DON'T SEE WHAT YOU NEED?
Call Your Representative - More Products Are Available.

SYNERGY LIGHTING

"The Nation's #1 Choice For Lighting Supply & Service!"

P: 941-756-4844 F: 941-756-4866

www.SynergyLightingUSA.com

©2011 My Light Link All rights reserved. Reproduction in whole or part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.