


# LOW MERCURY/ENVIRO-LUME™ T8 Linear Fluorescent

Superior  
Life®



ENVIRO-LUME™  
**↓ LOW ↓**  
MERCURY PRODUCT

## SUPERIOR LIFE® LAMP CONSTRUCTION

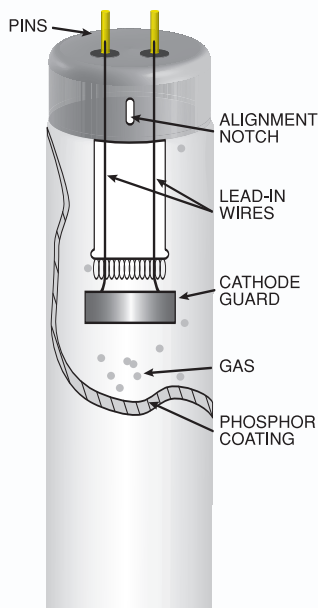

**ENVIRO-LUME™:**  
A Superior Life® linear fluorescent with 80% less mercury than that which is approved for domestic disposal. Passes EPA tests for substances that might dissolve into the eco-system.

## T8 LAMPS IMPROVE EFFICIENCY


Enjoy top lamp performance and energy efficiency with Superior Life® T8 fluorescent lamps. Built stronger to last longer, these lamps out-perform the competition, giving you the best overall value for a superior product.

Superior Life® linear fluorescents provide an economical as well as environmentally responsible alternative to standard T12 fluorescent lamps. T8 fluorescent lamps with electronic ballast have quickly become THE standard for new fixtures, as well as retrofits, in commercial buildings, schools, and many industrial facilities.

Five wattages are available including 17W, 25W, 28W, 32W and 59W with color temperatures ranging from 3000K to 6500K.

## SUPERIOR LIFE® T8 LAMPS

- **ADVANCED TECHNOLOGY AND EFFICIENCY**  
save up to 40% on energy costs over T12 lamps.
- **HIGH COLOR RENDERING**  
up to 91 CRI.
- **BRASS PINS**  
for better contact with sockets.
- **METAL ENDS**  
for increased durability.
- **STRONGER LEAD-IN WIRES**
- **EXTENDED LIFE PHOSPHORS**  
scientifically blended to reduce color-shift and provide consistent light over the life of the lamp.
- **TRIPLE TUNGSTEN CATHODE**  
heavy-duty, triple-wound to improve electrode emissions and coated with rare earth oxides to lengthen the cathode life.
- **CATHODE GUARD**  
precision-engineered alloys retard end-blackening and improve lumen maintenance.

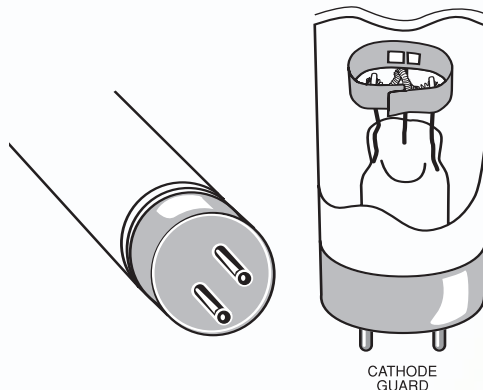

## T8 LINEAR FLUORESCENTS (Grouped by Wattage)

PART #	DESCRIPTION	WATTS	COLOR TEMP	LUMENS	CRI	CASE
91490	F17T8/730- SUPERIOR LIFE®	17	3000	1325	75	25
91495	F17T8/735- SUPERIOR LIFE®	17	3500	1325	75	25
91500	F17T8/741- SUPERIOR LIFE®	17	4100	1325	75	25
91505	F17T8/SKY-BRITE®	17	5000	1325	86	25
91521	F17T8/830- SUPERIOR LIFE®	17	3000	1400	86	25
91524	F17T8/835- SUPERIOR LIFE®	17	3500	1400	86	25
91527	F17T8/841- SUPERIOR LIFE®	17	4100	1400	86	25
91530	F17T8/SKY-BRITE PLUS®	17	5000	1400	86	25
91509	F25T8/730- SUPERIOR LIFE®	25	3000	2125	75	25
91510	F25T8/735- SUPERIOR LIFE®	25	3500	2125	75	25
91515	F25T8/741- SUPERIOR LIFE®	25	4100	2125	75	25
91520	F25T8/SKY-BRITE PLUS®	25	5000	2125	86	25
91533	F25T8/830- SUPERIOR LIFE®	25	3000	2225	86	25
91536	F25T8/835- SUPERIOR LIFE®	25	3500	2225	86	25
91539	F25T8/841- SUPERIOR LIFE®	25	4100	2225	86	25
91542	F25T8/SKY-BRITE PLUS®	25	5000	2225	86	25
91729	F32T8/835/25W - SUPERIOR LIFE®	25	3500	2500	85	30
91730	F32T8/841/25W - SUPERIOR LIFE®	25	4100	2500	85	30
91732	F32T8/SKY-BRITE PLUS®/25W	25	5000	2500	85	30
91620	F28T8/835 - SUPERIOR LIFE®	28	3500	2970	86	30
91621	F28T8/841- SUPERIOR LIFE®	28	4100	2970	86	30
91622	F28T8/SKY-BRITE PLUS®	28	5000	2970	86	30
81595	F32T8/730- SUPERIOR LIFE®	32	3000	2850	78	30
81601	F32T8/735- SUPERIOR LIFE®	32	3500	2850	78	30
81607	F32T8/741- SUPERIOR LIFE®	32	4100	2850	78	30
81613	F32T8/SKY-BRITE®	32	5000	2850	78	30
91595	F32T8/830- SUPERIOR LIFE®	32	3000	2950	86	30
91601	F32T8/835- SUPERIOR LIFE®	32	3500	2950	86	30
91607	F32T8/841- SUPERIOR LIFE®	32	4100	2950	86	30
91613	F32T8/SKY-BRITE PLUS®	32	5000	3200	86	30
92614	F32T8/865- SUPERIOR LIFE®	32	6500	2950	86	30
91615	F32T8/VITA-BRITE PLUS®	32	5700	2700	91	30
91610	F32T8/835 - HI LUMEN	32	3500	3200	86	30
91611	F32T8/841 - HI LUMEN	32	4100	3200	86	30
91612	F32T8/SKY-BRITE PLUS® - HI LUMEN	32	5000	3200	86	30
90150	F96T8/SKY-BRITE PLUS®	59	5000	5800	85	24

**Energy Saving 48"  
25W T8 Lamps**

**28W Energy Savers**

### RECYCLING

All T8 lamps contain trace amounts of mercury. Please help to encourage lamp recycling. For proper lamp disposal, contact your local municipal solid waste agency directly, or visit [www.lamprecycle.org](http://www.lamprecycle.org) for state-specific lamp recycling options.



Energy Efficient Products for Every Application



**PREMIUM QUALITY LIGHTING**  
1.800.323.8107 • FAX: 1.877.619.7053  
[www.pqlighting.com](http://www.pqlighting.com)

©2009 PQL, Inc.